

KR Electronics 2660 Bandpass Filter

General Description


KR 2660 is a 10.7 MHz surface mount bandpass filter. Other center frequencies and bandwidths available. Please consult the factory.

Features


- 10.7 MHz Center Frequency
- Elliptic Type Design
- High Stopband Rejection
- Surface Mount Package
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay (1 dB/div and 50 nsec/div)

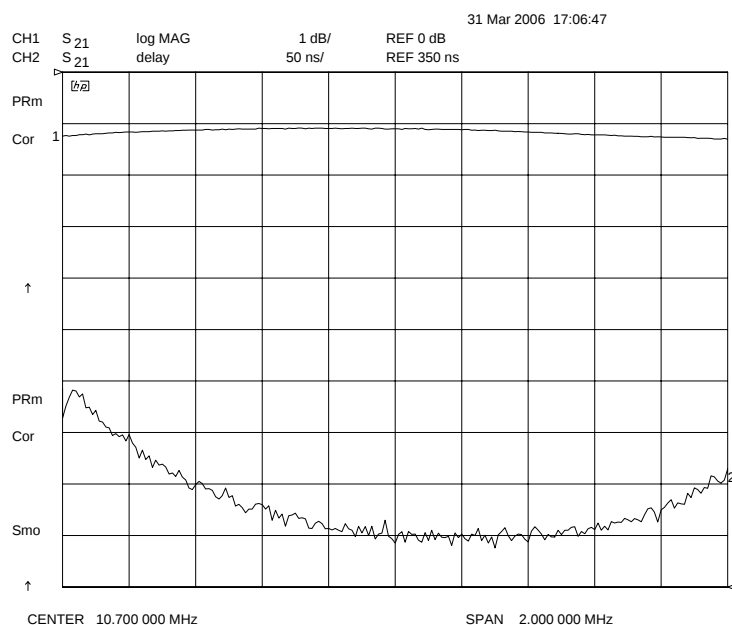

Overall Response (10 dB/div)

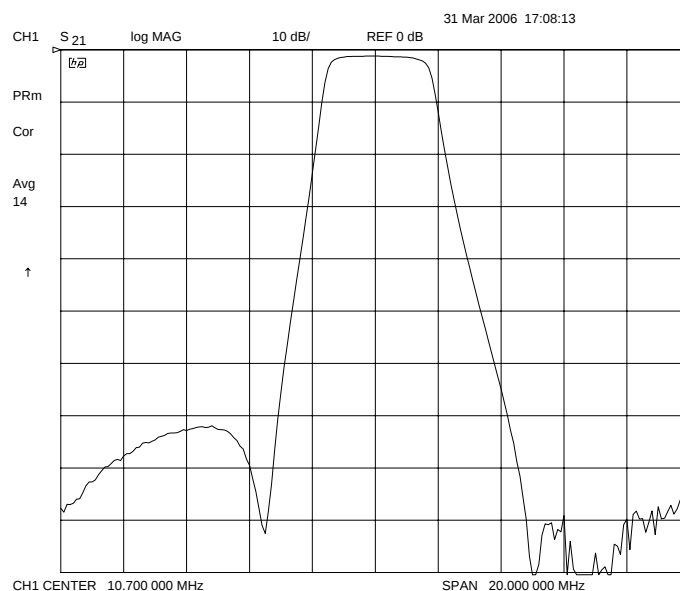

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

Parameter	Specification	Typical
Filter type	Bandpass	
Center Frequency	10.7 MHz	
Insertion Loss	< 2 dB	1.25 dB
1 dB Bandwidth	2 MHz min	2.88 MHz
65 dB Bandwidth	7.5 MHz max	6.75 MHz
Source and Load	50 Ω	

Technical drawing showing two views of a mechanical part with dimensions in inches.

Top View:

- Overall width: 1.500
- Overall height: 0.300
- Left side features a small rectangular protrusion with a width of 0.250.
- Right side features a small rectangular protrusion with a width of 0.100.

Front View:

- Overall width: 1.500
- Overall height: 0.500
- Left side features a small rectangular protrusion with a width of 0.250 and a height of 0.040.
- Right side features a small rectangular protrusion with a width of 0.100 and a height of 0.100.
- The main body of the part has a height of 0.250.
- The part has a series of rounded corners and a central slot.



Web www.krfilters.com
 Email sales@krfilters.com
 Phone (732) 636-1900
 Fax (732) 636-1982