

# PQ05SZ5/PQ05SZ1 Series

Low Power-Loss Voltage Regulators (Built-in Reverse Voltage Protection Function)

## ■ Features

- Low power-loss (Dropout voltage : MAX. 0.5V)
- Surface mount type package (Equivalent to SC-63)
- Built-in a function to prevent reverse voltage between input and output  
The diode to prevent reverse voltage between input and output is not necessary. (When  $V_{O1} \leq 13V$ )

## ■ Applications


- Portable equipment
- Notebook PC

## ■ Model Line-ups

|             |                                       | 5V output | 9V output | 12V output |
|-------------|---------------------------------------|-----------|-----------|------------|
| 0.5A output | Output voltage precision: $\pm 5\%$   | PQ05SZ5   | PQ09SZ5   | PQ12SZ5    |
|             | Output voltage precision: $\pm 2.5\%$ | PQ05SZ51  | PQ09SZ51  | PQ12SZ51   |
| 1A output   | Output voltage precision: $\pm 5\%$   | PQ05SZ1   | PQ09SZ1   | PQ12SZ1    |
|             | Output voltage precision: $\pm 2.5\%$ | PQ05SZ11  | PQ09SZ11  | PQ12SZ11   |

## ■ Outline Dimensions

(Unit : mm)

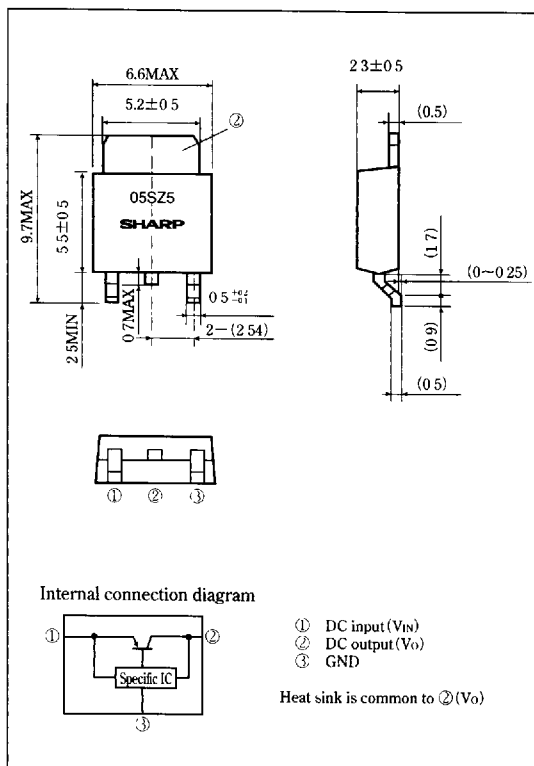

## ■ Absolute Maximum Ratings

( $T_a = 25^\circ\text{C}$ , xx=05,09,12)

(xx : 05,09,12)

| Parameter                    | Symbol    | Conditions        | Rating      |            | Unit             |
|------------------------------|-----------|-------------------|-------------|------------|------------------|
|                              |           |                   | PQxxSZ5/51  | PQxxSZ1/11 |                  |
| Input voltage                | $V_{IN}$  | *1                | 24          |            | V                |
| Input-output reverse voltage | $V_{O1}$  | $V_{IN} = 0V$     | 13          |            | V                |
| Output current               | $I_O$     |                   | 0.5         | 1.0        | A                |
| Power dissipation            | $P_D$     | Refer to Fig. 4*2 | 8           |            | W                |
| Junction temperature         | $T_J$     | *                 | 150         |            | $^\circ\text{C}$ |
| Operating temperature        | $T_{opr}$ |                   | -20 to +80  |            | $^\circ\text{C}$ |
| Storage temperature          | $T_{stg}$ |                   | -40 to +150 |            | $^\circ\text{C}$ |
| Soldering temperature        | $T_{sol}$ | For 10s           | 260         |            | $^\circ\text{C}$ |

\*1 All are open except GND and applicable terminals

\*2 With infinite heat sink

\* Over heat protection may operate at  $T_J \geq 125^\circ\text{C}$

• Please refer to the chapter 'Handling Precautions'.

SHARP

"In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest version of the device specification sheets before using any SHARP's device."

8180798 0014526 7T9

## Electrical Characteristics

 $(T_j = 25^\circ\text{C}, \text{xx} = 05, 09, 12)$ 

| Parameter                                 | Symbol          | Conditions                                                 | MIN. | TYP.       | MAX. | Unit                |
|-------------------------------------------|-----------------|------------------------------------------------------------|------|------------|------|---------------------|
| Output voltage                            | $V_O$           | $V_{IN} = 7\text{V}$                                       | 4.75 | 5.0        | 5.25 | V                   |
|                                           |                 | $V_{IN} = 11\text{V}$                                      | 8.55 | 9.0        | 9.45 |                     |
|                                           |                 | $V_{IN} = 14\text{V}$                                      | 11.4 | 12.0       | 12.6 |                     |
|                                           |                 | $V_{IN} = 7\text{V}$                                       | 4.88 | 5.0        | 5.12 |                     |
|                                           |                 | $V_{IN} = 11\text{V}$                                      | 8.78 | 9.0        | 9.22 |                     |
|                                           |                 | $V_{IN} = 14\text{V}$                                      | 11.7 | 12.0       | 12.3 |                     |
| Load regulation                           | $\text{Reg}_L$  | *4                                                         | —    | 0.2        | 2.0  | %                   |
| Line regulation                           | $\text{Reg}_I$  | $I_O = 5\text{mA}$ , *5                                    | —    | 0.1        | 2.5  | %                   |
| Temperature coefficient of output voltage | $\text{Tc} V_O$ | $I_O = 5\text{mA}$ , $T_j = 0$ to $125^\circ\text{C}$ , *6 | —    | $\pm 0.01$ | —    | %/ $^\circ\text{C}$ |
| Ripple rejection                          | RR              | Refer to Fig. 2                                            | 45   | 60         | —    | dB                  |
| Dropout voltage                           | $V_{rO}$        | *7                                                         | —    | 0.2        | 0.5  | V                   |
|                                           |                 |                                                            |      |            |      |                     |
| Quiescent current                         | $I_q$           | $I_O = 0\text{A}$ , *6                                     | —    | 4.0        | 10.0 | mA                  |

\*3 PQxxSZ1/11 Series:  $I_O = 0.5\text{A}$ PQxxSZ5/51 Series:  $I_O = 0.3\text{A}$ \*4 PQ05SZ1/11:  $V_{IN} = 7\text{V}$ ,  $I_O = 5\text{mA}$  to  $1.0\text{A}$  PQ05SZ5/51:  $V_{IN} = 7\text{V}$ ,  $I_O = 5\text{mA}$  to  $0.5\text{A}$ PQ09SZ1/11:  $V_{IN} = 11\text{V}$ ,  $I_O = 5\text{mA}$  to  $1.0\text{A}$  PQ09SZ5/51:  $V_{IN} = 11\text{V}$ ,  $I_O = 5\text{mA}$  to  $0.5\text{A}$ PQ12SZ1/11:  $V_{IN} = 14\text{V}$ ,  $I_O = 5\text{mA}$  to  $1.0\text{A}$  PQ12SZ5/51:  $V_{IN} = 14\text{V}$ ,  $I_O = 5\text{mA}$  to  $0.5\text{A}$ \*5 PQ05SZ1/11/5/51:  $V_{IN} = 6$  to  $16\text{V}$ PQ09SZ1/11/5/51:  $V_{IN} = 10$  to  $20\text{V}$ PQ12SZ1/11/5/51:  $V_{IN} = 13$  to  $23\text{V}$ \*6 PQ05SZ1/11/5/51:  $V_{IN} = 7\text{V}$ PQ09SZ1/11/5/51:  $V_{IN} = 11\text{V}$ PQ12SZ1/11/5/51:  $V_{IN} = 14\text{V}$ 

\*7 Input voltage shall be the value when output voltage is 95% in comparison with the initial value.

Fig.1 Test Circuit

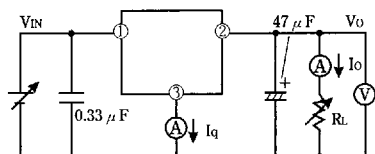


Fig.2 Test Circuit of Ripple Rejection

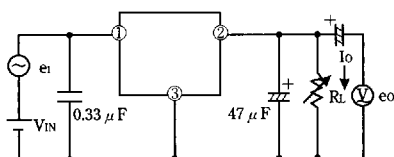
 $f = 120\text{Hz}$  (sine wave) $e_i = 0.5V_{rms}$  $V_{IN} = 7\text{V}$  (PQ05SZ1/11/5/51) $V_{IN} = 11\text{V}$  (PQ09SZ1/11/5/51) $V_{IN} = 14\text{V}$  (PQ12SZ1/11/5/51) $I_O = 0.3\text{A}$  $RR = 20 \log(e_i/e_o)$ 

Fig.3 Overcurrent Protection Characteristics (Typical Value)


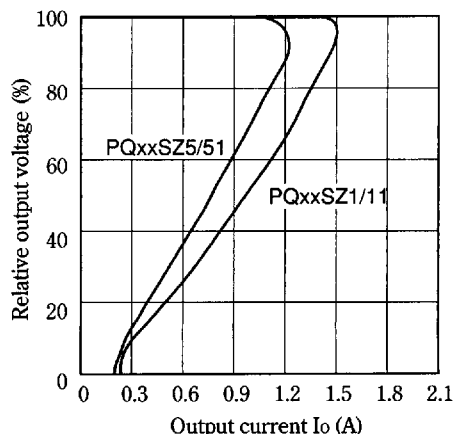


Fig. 4 Power Dissipation vs. Ambient Temperature

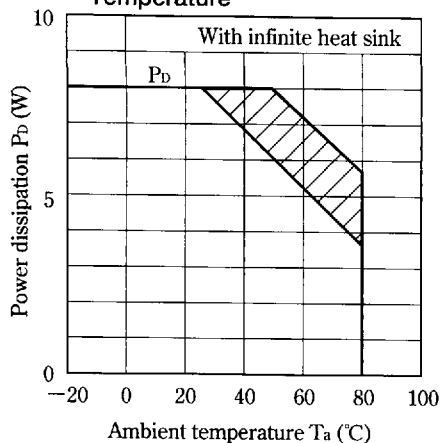

Note) Oblique line portion : Overheat protection may operate in this area.

Fig. 6 Output Voltage Deviation vs. Junction Temperature (PQ09SZ1/PQ09SZ11/PQ09SZ5/PQ09SZ51)

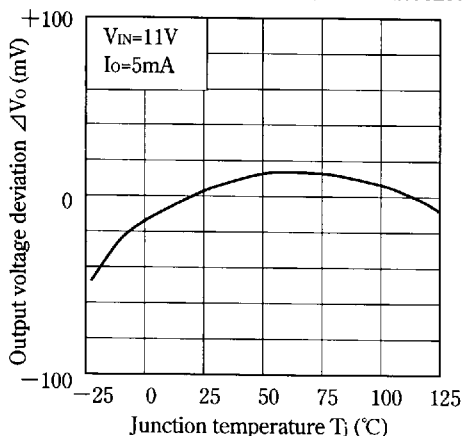


Fig. 8 Output Voltage vs. Input Voltage (PQ05SZ1/PQ05SZ11)

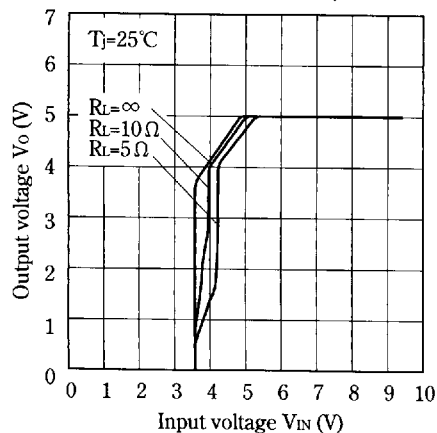


Fig. 5 Output Voltage Deviation vs. Junction Temperature (PQ05SZ1/PQ05SZ11/PQ05SZ5/PQ05SZ51)

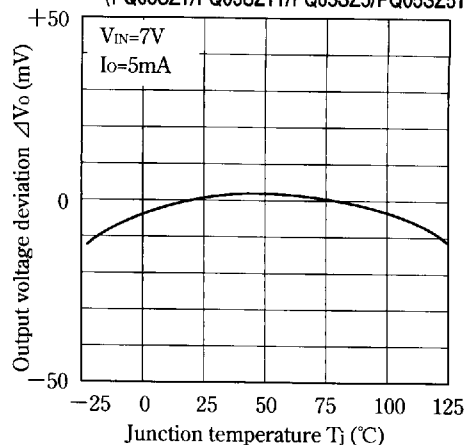


Fig. 7 Output Voltage Deviation vs. Junction Temperature (PQ12SZ1/PQ12SZ11/PQ12SZ5/PQ12SZ51)

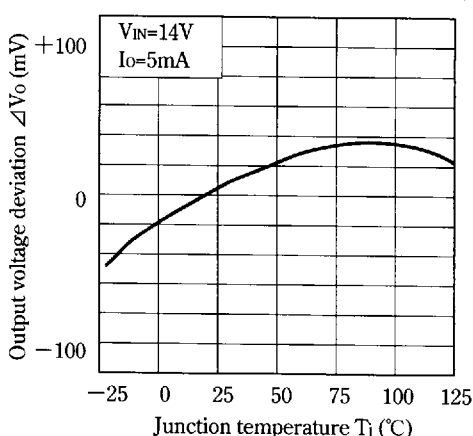


Fig. 9 Output Voltage vs. Input Voltage (PQ05SZ5/PQ05SZ51)

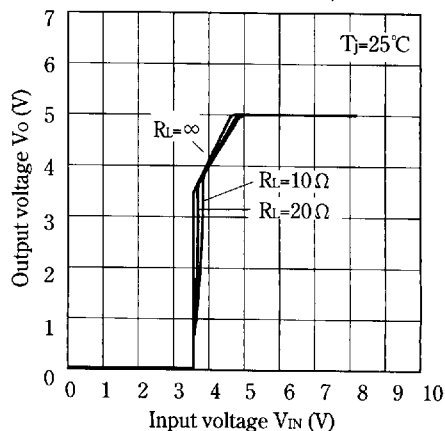


Fig.10 Output Voltage vs. Input Voltage (PQ09SZ1/PQ09SZ11)

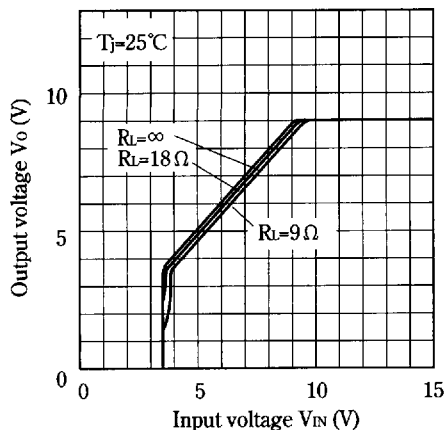


Fig.11 Output Voltage vs. Input Voltage (PQ09SZ5/PQ09SZ51)

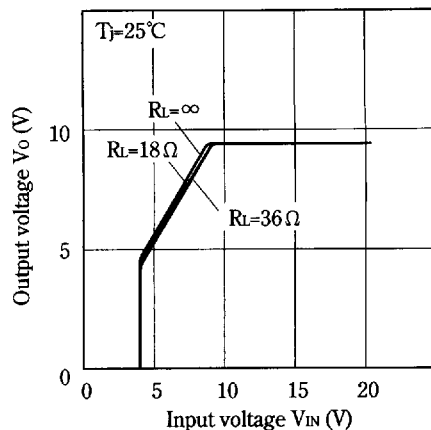


Fig.12 Output Voltage vs. Input Voltage (PQ12SZ1/PQ12SZ11)

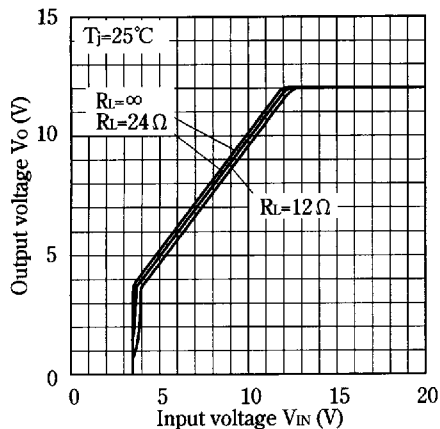


Fig.13 Output Voltage vs. Input Voltage (PQ12SZ5/PQ12SZ51)

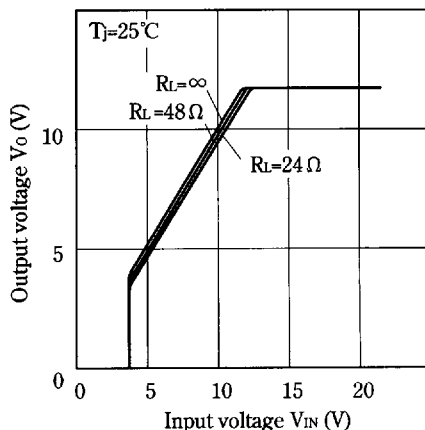


Fig.14-a Dropout Voltage vs. Junction Temperature (PQ05SZ5/51 Series)

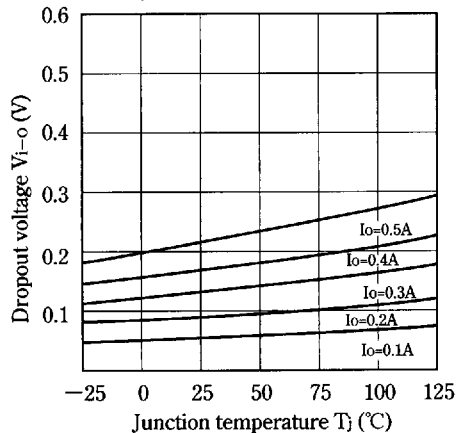


Fig.14-b Dropout Voltage vs. Junction Temperature (PQ05SZ1/11 Series)

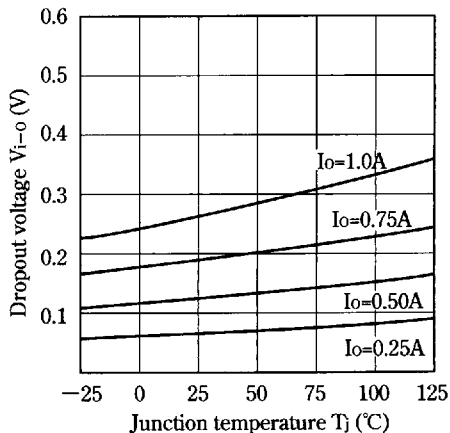


Fig.15 Circuit Operating Current vs. Input Voltage (PQ05SZ1/PQ05SZ11)

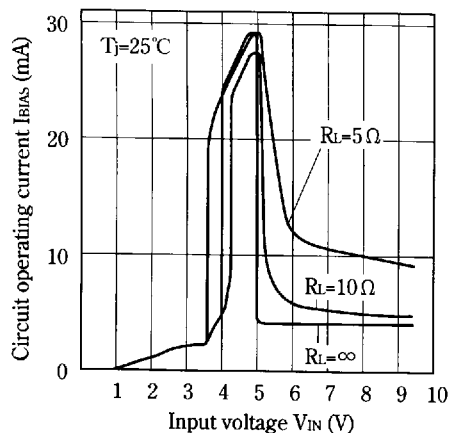


Fig.16 Circuit Operating Current vs. Input Voltage (PQ05SZ5/PQ05SZ51)

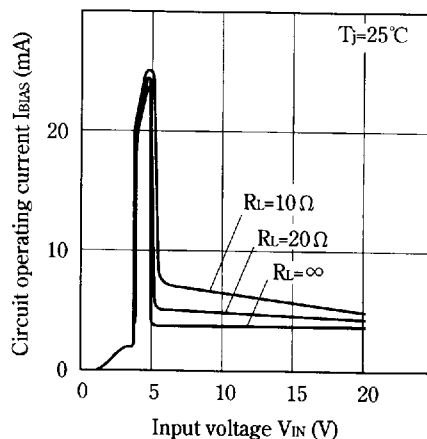


Fig.17 Circuit Operating Current vs. Input Voltage (PQ09SZ1/PQ09SZ11)

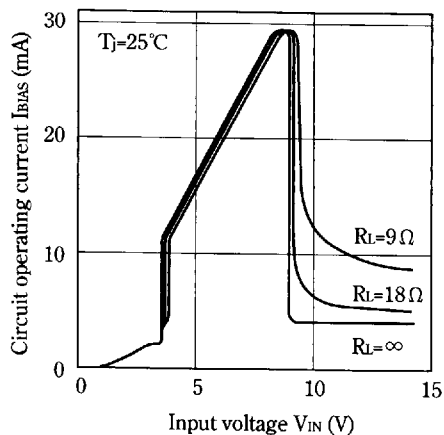


Fig.18 Circuit Operating Current vs. Input Voltage (PQ09SZ5/PQ09SZ51)

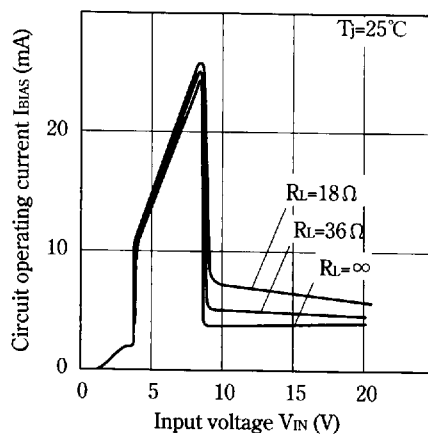


Fig.19 Circuit Operating Current vs. Input Voltage (PQ12SZ1/PQ12SZ11)



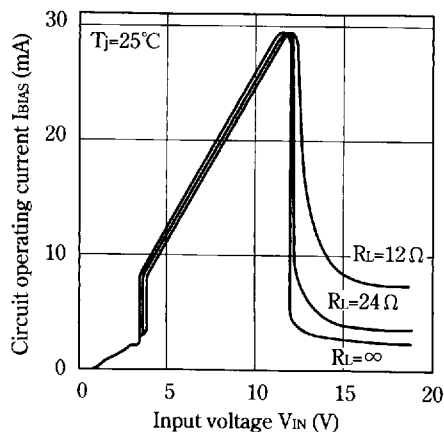



Fig.20 Circuit Operating Current vs. Input Voltage (PQ12SZ5/PQ12SZ51)

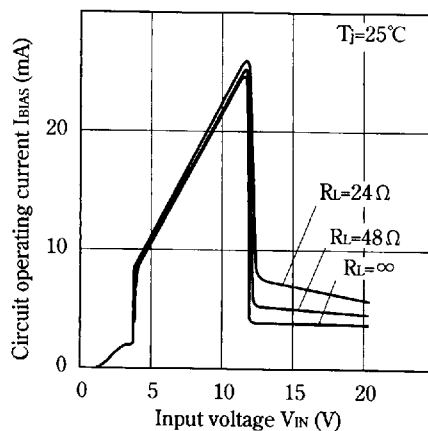


**Fig.21 Quiescent Current vs. Junction Temperature**  
(PQ05SZ1/PQ05SZ11/PQ09SZ1/PQ09SZ11/PQ12SZ1/PQ12SZ11)

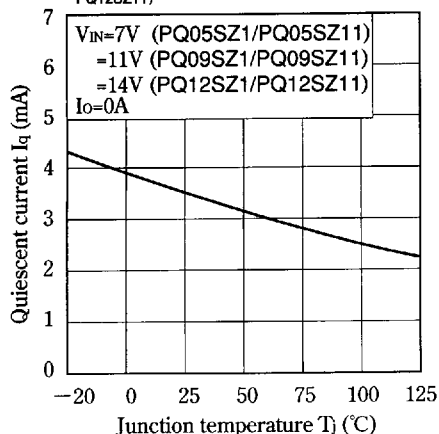


**Fig.22 Ripple Rejection vs. Input Ripple Frequency**  
(PQ05SZ1/PQ05SZ11/PQ09SZ1/PQ09SZ11/PQ12SZ1/PQ12SZ11)

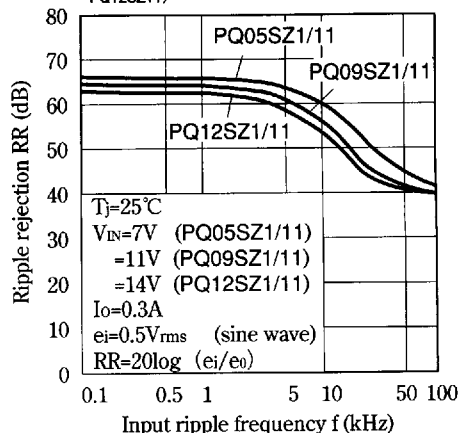


**Fig.23 Ripple Rejection vs. Input Ripple Frequency**  
(PQ05SZ5/PQ05SZ51/PQ09SZ5/PQ09SZ51/PQ12SZ5/PQ12SZ51)

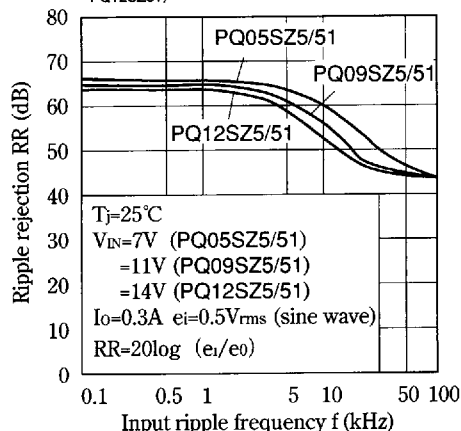

**Fig.24 Ripple Rejection vs. Output Current**  
(PQ05SZ1/11/ PQ09SZ1/11/ PQ12SZ1/11)

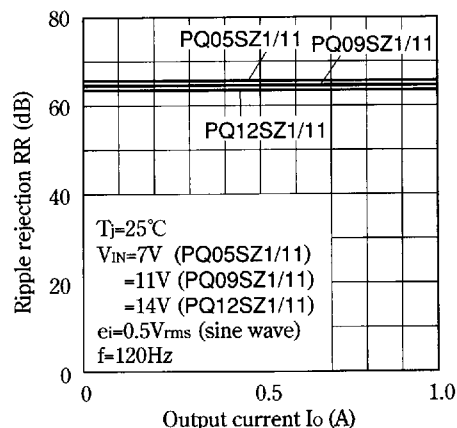

**Fig.25 Ripple Rejection vs. Output Current**  
(PQ05SZ5/51/ PQ09SZ5/51/ PQ12SZ5/51)

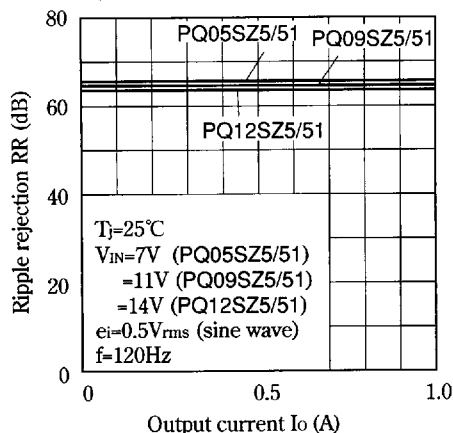

**Fig.26 Input-Output Reverse Current vs. Input-Output Reverse Voltage**

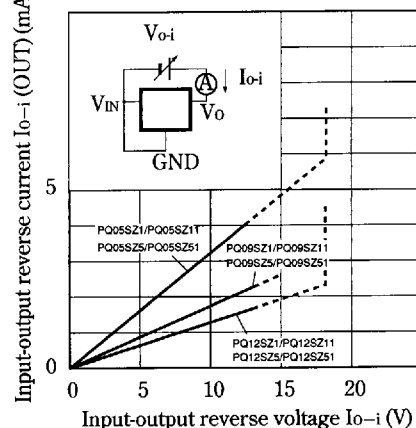


Fig.27 Power Dissipation vs. Ambient Temperature (Typical Value)



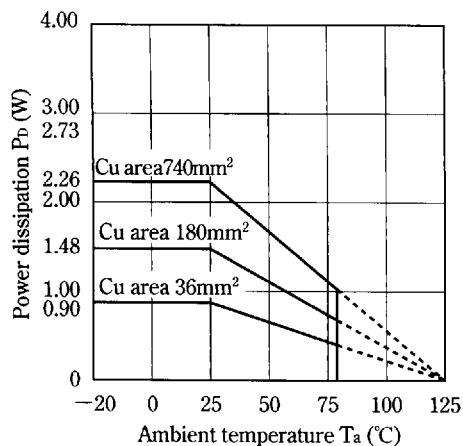


Fig.28 Power Dissipation vs. Cu Area

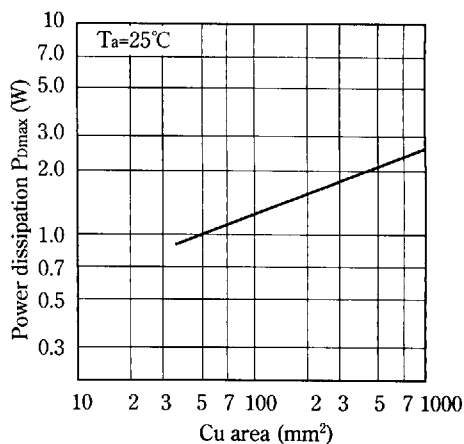

PWB



Material : Glass-cloth epoxy resin  
 Size : 50×50×1.6mm<sup>3</sup>  
 Cu thickness : 35  $\mu$ m

### Model Line-ups for Tape-packaged Products

| Output current | Sleeve-packaged products |                            | Tape-packaged products |                            |
|----------------|--------------------------|----------------------------|------------------------|----------------------------|
|                | Standard type            | High-precision output type | Standard type          | High-precision output type |
| 0.5A output    | PQ05SZ5 Series           | PQ05SZ51 Series            | PQ05SZ5T Series        | PQ05SZ5U Series            |
| 1.0A output    | PQ05SZ1 Series           | PQ05SZ11 Series            | PQ05SZ1T Series        | PQ05SZ1U Series            |