

## HC-B 48-TFL/PG29G

Order No.: 1772159

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1772159>

Sleeve housing, for single locking latch, height 96 mm, with screw connection, 1x Pg29, straight cable entry

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918036829      |
| Pack                     | 1 pcs.             |
| Customs tariff           | 85389099           |
| Weight/Piece             | 0.7757 KG          |
| Catalog page information | Page 506 (PC-2009) |

### Product notes

WEEE/RoHS-compliant since:  
03/01/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

|                              |                                      |
|------------------------------|--------------------------------------|
| Note                         | For contact inserts HC-B48, DD216, M |
| Design                       | B48                                  |
| Height                       | 96 mm                                |
| Width                        | 89 mm                                |
| Length                       | 131.5 mm                             |
| Housing type                 | Sleeve housings                      |
| Locking type                 | for single locking latch             |
| Type of the screw connection | 1x Pg29                              |

|                                 |                     |
|---------------------------------|---------------------|
| Pg screw connection             | With                |
| Wrench size, union nut          | 37 mm               |
| Cable exit                      | Straight            |
| External cable diameter         | 18 mm ... 27 mm     |
| Degree of protection            | IP65                |
| Ambient temperature (operation) | -40 °C ... 125 °C   |
| Housing material                | Aluminum, die-cast  |
| Housing surface material        | Powder-coated, gray |
| Cable gland material            | Nickel-plated brass |
| Cable seal material             | NBR                 |

#### Certificates / Approvals




Certification

GOST

#### Diagrams/Drawings

Dimensioned drawing

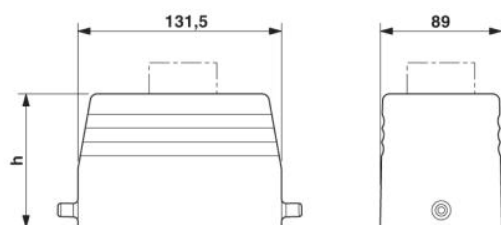

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;