

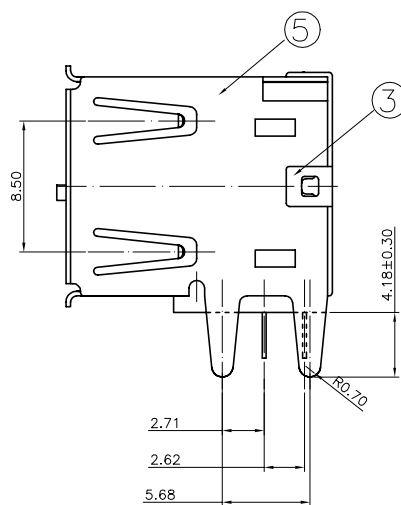
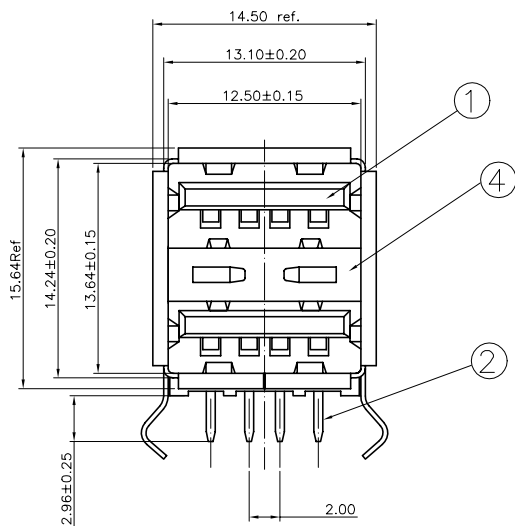


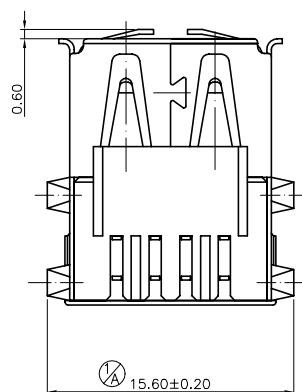

Recommended P.C.B Layout

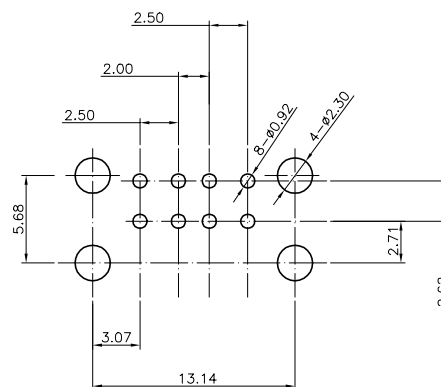

NOTE:
2547A-08□□□

1. Selective plated
- G1T-05u" Min. gold in contact area/
100u" Min. Tin in soldr area.
 - G2T-Gold flash in contact area/
100u" Min. Tin in soldr area.
 - G3T-10u" Min. gold in contact area/
100u" Min. Tin in soldr area.
 - G4T-15u" Min. gold in contact area/
100u" Min. Tin in soldr area.
 - G5T-30u" Min. gold in contact area/
100u" Min. Tin in soldr area.
 - G6T-50u" Min. gold in contact area/
100u" Min. Tin in soldr area.

5	Shell	C2680	——	Ni Plated
4	Shell	C2680	——	Ni Plated
3	Shell	C2680	——	Ni Plated
2	Tetminal	C6280	——	Gold Plated
1	Plastic	PBT	Black	UL94V-9
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

SUYIN
CONNECTOR

CUSTOMER COPY TITLE: USB Series A,R/A
Dual Port Dip Type

						Angle	±2°	DRAW	蔡志鴻	02/02/02	PART NO.							
						30 ~	±0.50											
ECIT-020418-04	A	02/04/18	A1:16.00±0.15→15.60±0.20	林怡豪	宋權哲	10 ~ 30	±0.30	DESIGN	蔡志鴻	02/02/02	PART NO. (OLD)		2547A-08GXT					
	0	02/02/04	New			~ 10	±0.15	CHECK	宋權哲	02/02/02	DRAWING NO. <table border="1"><tr><td>D</td><td>ING</td></tr></table>		D	ING	2547A-08GXT			
D	ING																	
ECN (DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO.	宋權哲	02/02/02	SCALE	2:1	UNIT	mm	A4			