

Octal bus transceiver with direction pin with 5-volt tolerant inputs/outputs; damping resistor; 3-state

**74LVC2245A
74LVCH2245A**

FEATURES

- 5-Volt tolerant inputs/outputs, for interfacing with 5-volt logic.
- Supply voltage range of 2.7 V to 3.6 V
- In accordance with JEDEC standard no. 8-1A.
- CMOS low power consumption
- Direct interface with TTL levels
- High impedance when $V_{CC} = 0$ V
- Bushold on all data inputs (LVCH245A only).
- integrated 30Ω damping resistor.

DESCRIPTION

The 74LVC(H)2245A is a high-performance, low-power, low-voltage, Si-gate CMOS device and superior to most advanced CMOS compatible TTL families. Inputs can be driven from either 3.3 V or 5 V devices. In 3-state operation, outputs can handle 5 V. These features allow the use of these devices in a mixed 3.3 V/5 V environment

The 74LVC(H)2245A is an octal transceiver featuring non-inverting 3-state bus compatible outputs in both send and receive directions. The '245' features an output enable ($\overline{OE}$) input for easy cascading and a send/receive (DIR) input for direction control. $\overline{OE}$ controls the outputs so that the buses are effectively isolated.

The '2245' is identical to the '2640' but has true (non-inverting) outputs.

FUNCTION TABLE

INPUTS		INPUTS/OUTPUT	
$\overline{OE}$	DIR	A_n	B_n
L	L	$A = B$	inputs
L	H	inputs	$B = A$
H	X	Z	Z

H = HIGH voltage level

L = LOW voltage level

X = don't care

Z = high impedance OFF-state

QUICK REFERENCE DATA

GND = 0 V; $T_{amb} = 25^\circ\text{C}$; $t_r = t_f \leq 2.5$ ns

SYMBOL	PARAMETER	CONDITIONS	TYPICAL	UNIT
t_{PHL}/t_{PLH}	propagation delay A_n to B_n ; B_n to A_n	$C_L = 50$ pF $V_{CC} = 3.3$ V	4.1	ns
C_i	input capacitance		5.0	pF
$C_{i/O}$	input/output capacitance		10	pF
C_{PD}	power dissipation capacitance per buffer	notes 1 and 2	40	pF

Notes to the quick reference data

1. C_{PD} is used to determine the dynamic power dissipation (P_D in μW):
 $P_D = C_{PD} \times V_{CC}^2 \times f_i + \Sigma (C_L \times V_{CC}^2 \times f_o)$ where:
 f_i = input frequency in MHz; C_L = output load capacity in pF;
 f_o = output frequency in MHz; V_{CC} = supply voltage in V;
 $\Sigma (C_L \times V_{CC}^2 \times f_o)$ = sum of outputs.
2. The condition is $V_i = \text{GND to } V_{CC}$.

ORDERING INFORMATION

TYPE NUMBER	PACKAGES			
	PINS	PACKAGE	MATERIAL	CODE
74LVC(H)2245AD	20	SO20	plastic	SOT163-1
74LVC(H)2245ADB	20	SSOP20	plastic	SOT339-1
74LVC(H)2245APW	20	TSSOP20	plastic	SOT360-1

PINNING

PIN	SYMBOL	NAME AND FUNCTION
1	DIR	direction control
2, 3, 4, 5, 6, 7, 8, 9	A_0 to A_7	data inputs/outputs
10	GND	ground (0 V)
18, 17, 16, 15, 14, 13, 12, 11	B_0 to B_7	data inputs/outputs
19	$\overline{OE}$	output enable input (active LOW)
20	V_{CC}	positive supply voltage

Octal bus transceiver with direction pin with 5-volt tolerant inputs/outputs; damping resistor; 3-state

74LVC2245A
74LVCH2245A

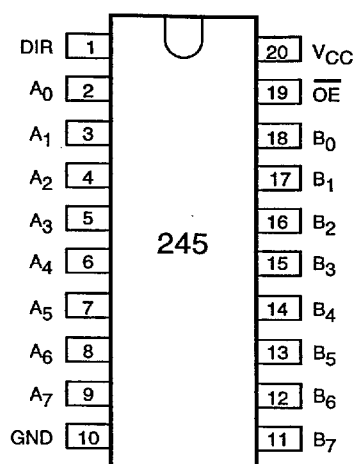


Fig.1 Pin configuration.

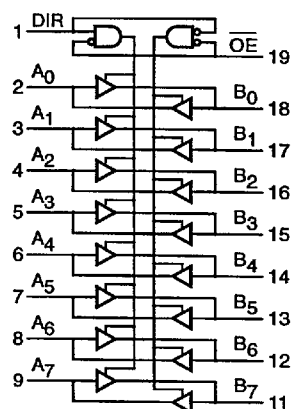


Fig.2 Logic symbol.

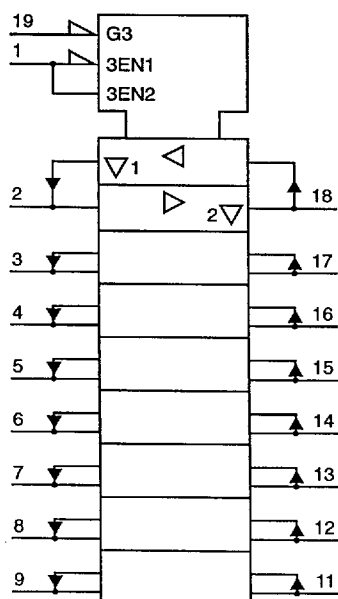


Fig.3 IEC logic symbol.

Octal bus transceiver with direction pin with 5-volt
tolerant inputs/outputs; damping resistor; 3-state

74LVC2245A
74LVCH2245A

DC CHARACTERISTICS FOR 74LVC(H)2245A

For the DC characteristics see chapter "LVC(H)-A family characteristics", section "Family specifications".

I_{CC} category: MSI

AC CHARACTERISTICS FOR 74LVC(H)2245A

GND = 0 V; $t_r = t_f \leq 2.5$ ns; $C_L = 50$ pF

SYMBOL	PARAMETER	T_{amb} (°C) -40 to +85			UNIT	TEST CONDITIONS	
		MIN.	TYP.	MAX.		V_{CC} (V)	WAVEFORMS
t_{PHL}/t_{PLH}	propagation delay A_n to B_n ; B_n to A_n	—	—	—	ns	1.2	Figs 4, 6
		1.5	—	9.5		2.7	
t_{PZH}/t_{PZL}	3-state output enable time $\overline{OE}$ to A_n ; $\overline{OE}$ to B_n	—	—	—	ns	1.2	Figs 5, 6
		1.5	—	10.5		2.7	
t_{PHZ}/t_{PLZ}	3-state output disable time $\overline{OE}$ to A_n ; $\overline{OE}$ to B_n	—	—	—	ns	1.2	Figs 5, 6
		1.5	—	8.0		2.7	
		1.5	—	7.0		3.0 to 3.6	




Notes: All typical values are measured at $T_{amb} = 25$ °C.

* Typical values are measured at $V_{CC} = 3.3$ V.

Octal bus transceiver with direction pin with 5-volt tolerant inputs/outputs; damping resistor; 3-state

74LVC2245A 74LVCH2245A

AC WAVEFORMS

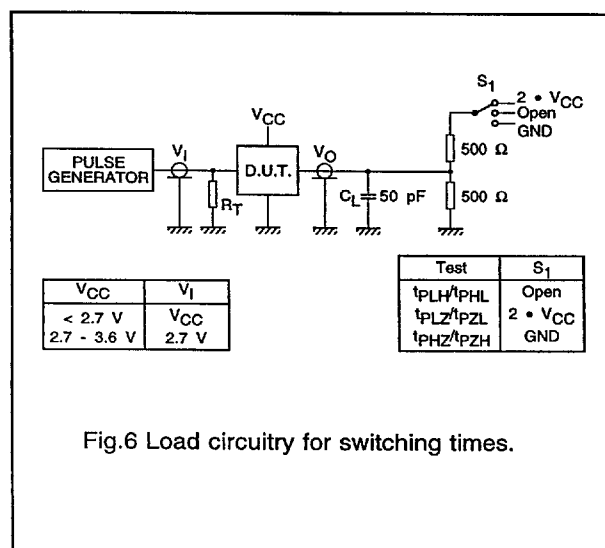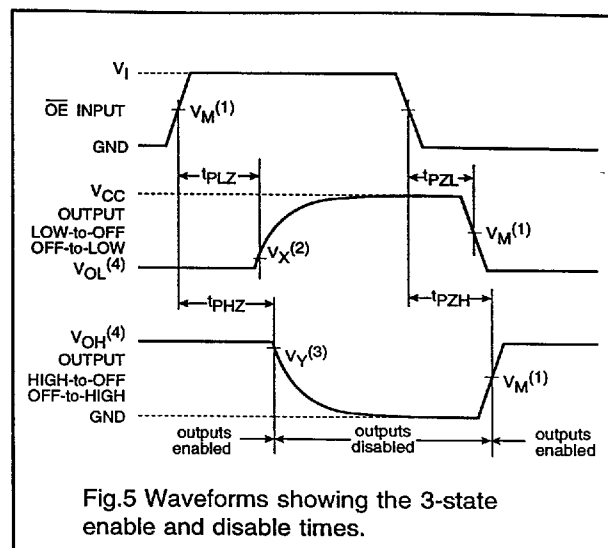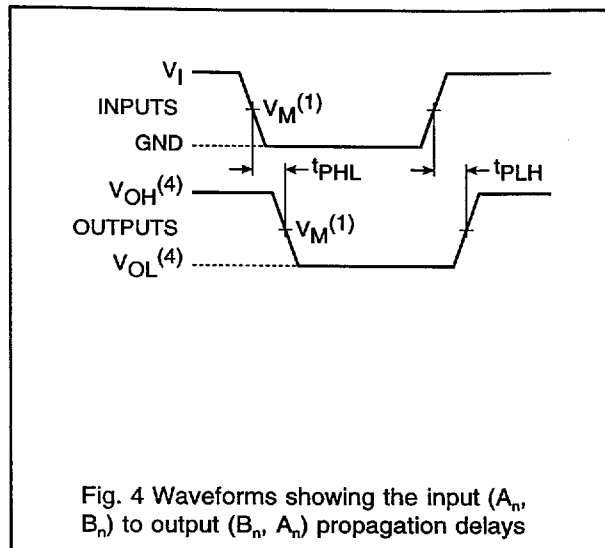

- Notes:
- (1) $V_M = 0.5 \cdot V_{CC}$ at $V_{CC} < 2.7$ V
 $V_M = 1.5$ V at $V_{CC} \geq 2.7$ V
 - (2) $V_X = V_{OL} + 0.3$ V at $V_{CC} \geq 2.7$ V
 $V_X = V_{OL} + 0.1 \cdot V_{CC}$ at $V_{CC} < 2.7$ V
 - (3) $V_Y = V_{OH} - 0.3$ V at $V_{CC} \geq 2.7$ V
 $V_Y = V_{OH} - 0.1 \cdot V_{CC}$ at $V_{CC} < 2.7$ V
 - (4) V_{OL} and V_{OH} are the typical output voltage drop that occur with the output load.