


ISOLATED HERMETIC TO-257AA ADJUSTABLE VOLTAGE REGULATOR



**Three Terminal, Adjustable Voltage, 1.5 Amp
Precision Positive Regulator In Hermetic
JEDEC TO-257AA Package**

FEATURES

- Isolated Hermetic Package, JEDEC TO-257AA Outline
- Adjustable Output Voltage
- Eliminates Stocking Fixed Voltages
- Built-In Thermal Overload Protection
- Short Circuit Current Limiting
- Product Is Available Screened To OM803
- Similar To Industry Standard P/N LM117

DESCRIPTION

This three terminal positive regulator is supplied in a hermetically sealed metal package whose outline is similar to the industry standard TO-220 plastic package. All protective features are designed into the circuit, including thermal shutdown, current limiting and safe-area control. With heat sinking, they can deliver over 1.0 amp of output current. This unit features output voltages that can be trimmed using external resistors, from 1.2 volts to 37 volts.

ABSOLUTE MAXIMUM RATINGS @ 25°C

Input-Output Voltage Differential 40V
 Operating Junction Temperature Range -55°C to +150°C
 Storage Temperature Range -65° to +150°C

Typical Power/Thermal Characteristics:

Rated Power @ 25°C

T_C 17.5W

T_A 3W

Thermal Resistance

θ_{JC} 3.5°C/W

θ_{JA} 42°C/W

3.3

Note: This device is also available in a non-isolated JEDEC TO-257AA package.
 Use part number OM7602NT for non-isolated unit.

■ 6789073 0001662 017 ■

ELECTRICAL CHARACTERISTICS $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$, $I_L = 8\text{mA}$ (unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Reference Voltage	V_{REF}	$V_{\text{DIFF}} = 3.0\text{V}$, $T_A = 25^{\circ}\text{C}$	1.238	1.262	V
		$V_{\text{DIFF}} = 3.3\text{V}$	1.225	1.270	
		$V_{\text{DIFF}} = 40\text{V}$	1.225	1.270	
Line Regulation (Note 1)	R_{LINE}	$3.0\text{V} \leq V_{\text{DIFF}} \leq 40\text{V}$, $V_{\text{out}} = V_{\text{ref}}$, $T_A = 25^{\circ}\text{C}$	-4.5	4.5	mV
		$3.3\text{V} \leq V_{\text{DIFF}} \leq 40\text{V}$, $V_{\text{out}} = V_{\text{ref}}$	-9	9	
Load Regulation (Note 1)	R_{LOAD}	$V_{\text{DIFF}} = 3.0\text{V}$, $10\text{mA} \leq I_L \leq 1.5\text{A}$, $T_A = 25^{\circ}\text{C}$	-15	15	mV
		$V_{\text{DIFF}} = 3.3\text{V}$, $10\text{mA} \leq I_L \leq 1.5\text{A}$	-15	15	
		$V_{\text{DIFF}} = 40\text{V}$, $10\text{mA} \leq I_L \leq 300\text{mA}$, $T_A = 25^{\circ}\text{C}$	-15	15	
		$V_{\text{DIFF}} = 40\text{V}$, $10\text{mA} \leq I_L \leq 195\text{mA}$	-15	15	
Thermal Regulation	V_{RTH}	$V_{\text{in}} = 14.6\text{V}$, $I_L = 1.5\text{A}$ $P_d = 20\text{ Watts}$, $t = 20\text{ ms}$, $T_A = 25^{\circ}\text{C}$	-5	5	mV
Ripple Rejection (Note 2)	R_{N}	$f = 120\text{ Hz}$, $V_{\text{out}} = V_{\text{ref}}$ $C_{\text{Adj}} = 10\text{ }\mu\text{F}$, $I_{\text{out}} = 100\text{ mA}$	66		dB
Adjustment Pin Current	I_{Adj}	$V_{\text{DIFF}} = 3.0\text{V}$, $T_A = 25^{\circ}\text{C}$		100	μA
		$V_{\text{DIFF}} = 3.3\text{V}$		100	
		$V_{\text{DIFF}} = 40\text{V}$		100	
Adjustment Pin Current Change	ΔI_{Adj}	$V_{\text{DIFF}} = 3.0\text{V}$, $10\text{mA} \leq I_L \leq 1.5\text{A}$, $T_A = 25^{\circ}\text{C}$	-5	5	μA
		$V_{\text{DIFF}} = 3.3\text{V}$, $10\text{mA} \leq I_L \leq 1.5\text{A}$	-5	5	
		$V_{\text{DIFF}} = 40\text{V}$, $10\text{mA} \leq I_L \leq 300\text{mA}$, $T_A = 25^{\circ}\text{C}$	-5	5	
		$V_{\text{DIFF}} = 40\text{V}$, $10\text{mA} \leq I_L \leq 195\text{mA}$	-5	5	
		$3.0\text{V} \leq V_{\text{DIFF}} \leq 40\text{V}$, $T_A = 25^{\circ}\text{C}$	-5	5	
		$3.3\text{V} \leq V_{\text{DIFF}} \leq 40\text{V}$	-5	5	
Minimum Load Current	I_{Lmin}	$V_{\text{DIFF}} = 3.0\text{V}$, $V_{\text{OUT}} = 1.4\text{V}$ (forced)		5.0	mA
		$V_{\text{DIFF}} = 3.3\text{V}$, $V_{\text{OUT}} = 1.4\text{V}$ (forced)		5.0	
		$V_{\text{DIFF}} = 40\text{V}$, $V_{\text{OUT}} = 1.4\text{V}$ (forced)		5.0	
Current Limit (Note 2)	I_{CL}	$V_{\text{DIFF}} = 15\text{V}$	1.5	3.5	A
		$V_{\text{DIFF}} = 40\text{V}$, $T_A = 25^{\circ}\text{C}$	0.18	1.5	

Notes:


1. Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
2. If not tested, shall be guaranteed to the specified limits.
3. The • denotes the specifications which apply over the full operating temperature range.

3.3**STANDARD APPLICATION**







- * C_{IN} is required if regulator is located an appreciable distance from power supply filter.
- ** C_{O} is not needed for stability, however it does improve transient response.

$$V_{\text{OUT}} = 1.25\text{V} \left(1 + \frac{R_2}{R_1}\right) + I_{\text{Adj}} R_2$$

Since I_{Adj} is controlled to less than $100\mu\text{A}$, the error associated with this term is negligible in most applications.

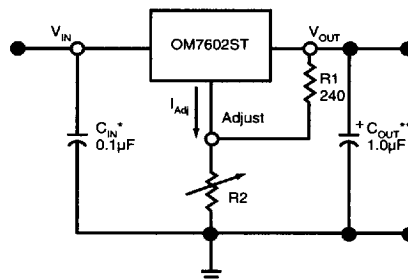


TYPICAL PERFORMANCE CHARACTERISTICS

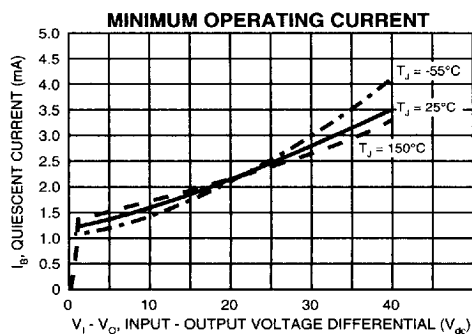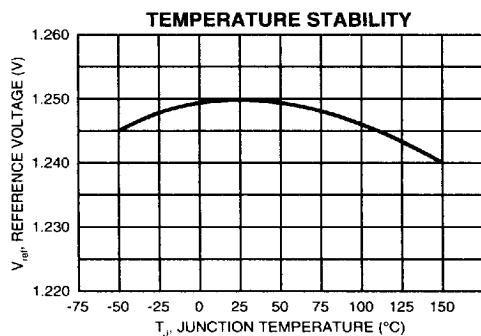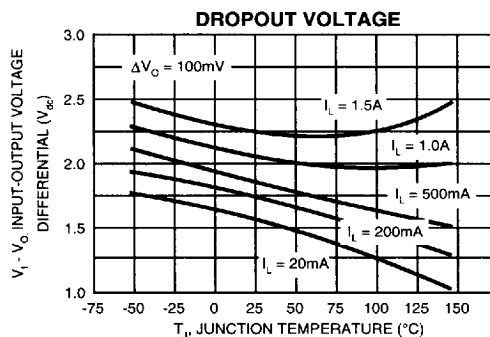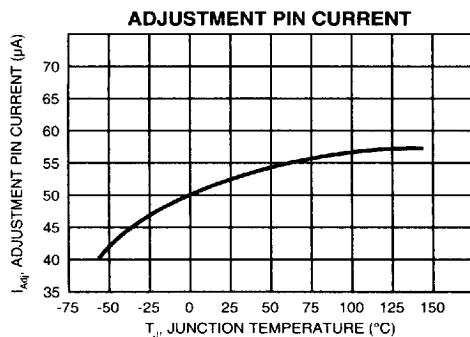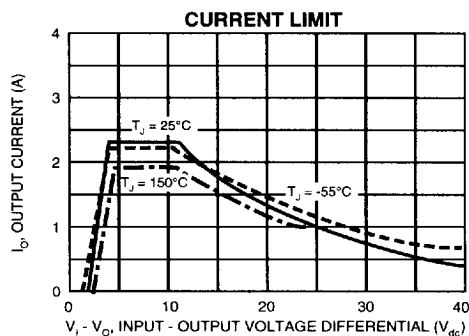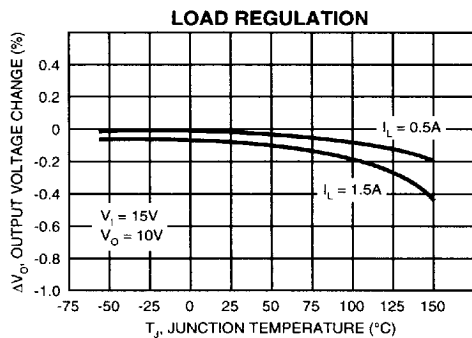


3.3

TYPICAL APPLICATIONS


ADJUSTABLE CURRENT LIMITER

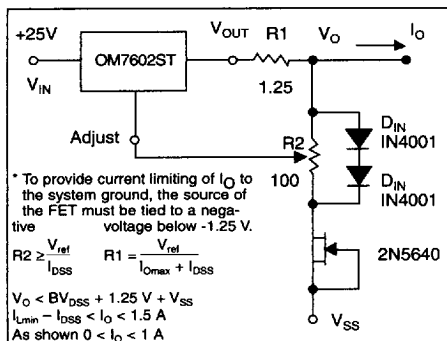


5V ELECTRONIC SHUT DOWN REGULATOR

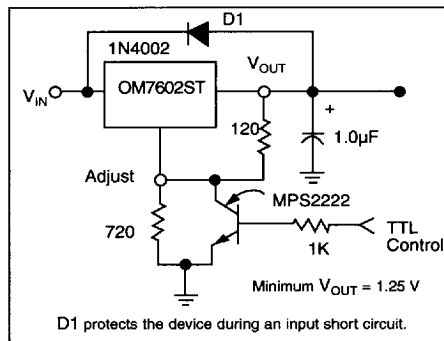


SLOW TURN-ON REGULATOR

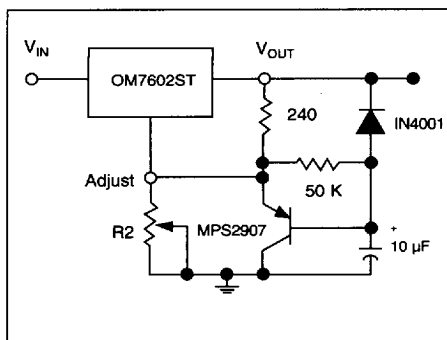

CURRENT REGULATOR

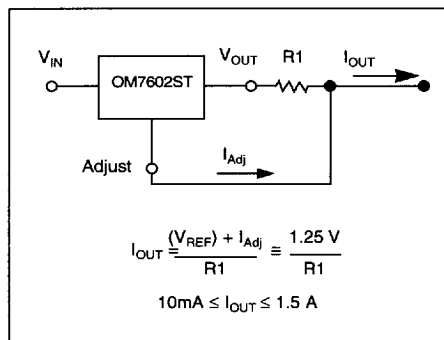


MECHANICAL OUTLINE

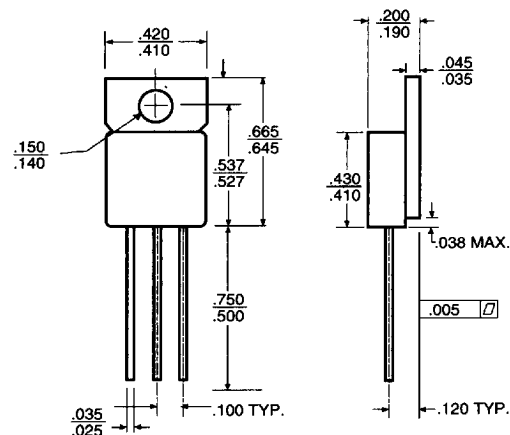

NOTES

- Case is metal/hermetically sealed
- Isolated Tab

PIN CONNECTION



ISOLATED

Front View

Pin 1: Adjust

Pin 2: Output

Pin 3: Input

Tab: Isolated

NON-ISOLATED

Front View

Pin 1: Adjust

Pin 2: Output

Pin 3: Input

Tab: Output

6789073 0001665 826



205 Crawford Street, Leominster, MA 01453 USA (508) 534-5776 FAX (508) 537-4246

3.3-134