


1.5 AMP POSITIVE ADJUSTABLE VOLTAGE REGULATOR APPROVED TO DESC DRAWING 7703407



Three Terminal, Precision Adjustable Positive Voltage Regulator In Hermetic Style Packages (LM117AHV)

FEATURES

- Similar To Industry Standard LM117AHV
- Approved To DESC Standardized Military Drawing Number 7703407
- Built In Thermal Overload Protection
- Short Circuit Current Limiting
- Available In Six Package Styles
- Maximum Output Voltage Tolerance Is Guaranteed to $\pm 1\%$

DESCRIPTION

These three terminal positive regulators are supplied in hermetically sealed packages. All protective features are designed into the circuit, including thermal shutdown, current-limiting, and safe-area control. With heat sinking, these devices can deliver up to 1.5 Amps of output current. The LCC-20 device is limited to 0.5 Amps. The unit also features output voltages that can be fixed from 1.2 Volts to 57 Volts using external resistors.

ABSOLUTE MAXIMUM RATINGS T_c @ 25°C

Power Dissipation

LCC-20 1.1 W

Case-All Others.20 W

Input - Output Voltage Differential 60 V

Operating Junction Temperature Range - 55°C to + 150°C

Storage Temperature Range - 65°C to + 150°C

Lead Temperature (Soldering 10 seconds) 300°C

Thermal Resistance, Junction to Case:

LCC-20 17°C/W

TO-257 (Isol), SMD-3 and SMD 257. 4.2°C/W

TO-257 (Non-Isol) and SMD-1. 3.5°C/W

TO-3 3.0°C/W

Maximum Output Current:

LCC-20. 0.5 A

Case-All Others. 1.5A

Recommended Operating Conditions:

Output Voltage Range 1.2 to 57 VDC

Ambient Operating Temperature Range (T_A). - 55°C to + 125°C

Input Voltage Range 4.25 to 61.25 VDC

3.3

OM1326NTM, OM1326STM, OM1326NKM, OM1326SMM, OM1326NMM, OM1326N2M, OM1326SRM

ELECTRICAL CHARACTERISTICS -55°C ≤ T_A ≤ 125°C, I_L = 8mA (unless otherwise specified)

OM1326NTM, OM1326STM, OM1326NKM, OM1326SMM, OM1326NMM, OM1326SRM

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Reference Voltage	V _{REF}	V _{DIFF} = 3.0V, T _A = 25°C V _{DIFF} = 3.3V • V _{DIFF} = 40V • V _{DIFF} = 60V •	1.238 1.225 1.225 1.225	1.262 1.270 1.270 1.270	V
Line Regulation (Note 1)	R _{LINE}	3.0V ≤ V _{DIFF} ≤ 40V, V _{out} = V _{ref} , T _A = 25°C 3.3V ≤ V _{DIFF} ≤ 40V, V _{out} = V _{ref} 40V ≤ V _{DIFF} ≤ 60V, V _{out} = V _{ref} , T _A = 25°C 40V ≤ V _{DIFF} ≤ 60V, V _{out} = V _{ref}	-4.5 -9 -5 -10	4.5 -9 5 10	mV
Load Regulation (Note 1)	R _{LOAD}	V _{DIFF} = 3.0V, 10mA ≤ I _L ≤ 1.5A, T _A = 25°C V _{DIFF} = 3.3V, 10mA ≤ I _L ≤ 1.5A V _{DIFF} = 40V, 10mA ≤ I _L ≤ 300mA, T _A = 25°C V _{DIFF} = 40V, 10mA ≤ I _L ≤ 195mA V _{DIFF} = 60V, 10mA ≤ I _L ≤ 30mA	-15 -15 -15 -15 -15	15 15 15 15 15	mV
Thermal Regulation	V _{RTH}	V _{in} = 14.6V, I _L = 1.5A P _d = 20 Watts, t = 20 ms, T _A = 25°C	-5	5	mV
Ripple Rejection (Note 2)	R _N	f = 120 Hz, V _{out} = V _{ref} C _{Adj} = 10 μF, I _{out} = 100 mA	• 66		dB
Adjustment Pin Current	I _{Adj}	V _{DIFF} = 3.0V, T _A = 25°C V _{DIFF} = 3.3V • V _{DIFF} = 40V • V _{DIFF} = 60V •		100 100 100 100	μA
Adjustment Pin Current Change	ΔI _{Adj}	V _{DIFF} = 3.0V, 10mA ≤ I _L ≤ 1.5A, T _A = 25°C V _{DIFF} = 3.3V, 10mA ≤ I _L ≤ 1.5A V _{DIFF} = 40V, 10mA ≤ I _L ≤ 300mA, T _A = 25°C V _{DIFF} = 40V, 10mA ≤ I _L ≤ 195mA 3.0V ≤ V _{DIFF} ≤ 40V, T _A = 25°C 3.3V ≤ V _{DIFF} ≤ 40V 3.3V ≤ V _{DIFF} ≤ 60V	-5 -5 -5 -5 -5 -5 -5	5 5 5 5 5 5 5	μA
Minimum Load Current	I _{Lmin}	V _{DIFF} = 3.0V, V _{out} = 1.4V (forced) V _{DIFF} = 3.3V, V _{out} = 1.4V (forced) V _{DIFF} = 40V, V _{out} = 1.4V (forced) V _{DIFF} = 60V, V _{out} = 1.4V (forced)	• • • •	5.0 5.0 5.0 7.0	mA
Current Limit (Note 2)	I _{CL}	V _{DIFF} = 5V V _{DIFF} = 40V, T _A = 25°C V _{DIFF} = 60V, T _A = 25°C	• 1.5 0.3 0.05	3.5 1.5 0.50	A

Notes:

- Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
- If not tested, shall be guaranteed to the specified limits.
- The • denotes the specifications which apply over the full operating temperature range.

PART NUMBER DESIGNATOR

Standard Military Drawing Number

77034074
7703407M
7703407U
7703407T
7703407Y
7703407N
77034072


Omnirel Part Number

OM1326SRM
OM1326SMM
OM1326STM
OM1326NTM
OM1326NKM
OM1326NMM
OM1326N2M

Omnirel Package Designation


SMD257
SMD-3
TO-257 (Isolated)
TO-257 (non-Isolated)
TO-3
SMD-1
LCC-20

Part Numbering System



* Package Codes:
K= TO-204AA (TO-3)
T= TO-257AA
2= LCC-20
M= SMD-1, 3
R= D-Pac

International Rectifier Companies
The Hi-Rel Components & Subsystems Group



ELECTRICAL CHARACTERISTICS $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$, $I_L = 8\text{mA}$ (unless otherwise specified)**OM1326N2M**

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Reference Voltage	V_{REF}	$V_{\text{DIFF}} = 3.0\text{V}$, $T_A = 25^{\circ}\text{C}$	1.238	1.262	V
		$V_{\text{DIFF}} = 3.3\text{V}$	1.225	1.270	
		$V_{\text{DIFF}} = 40\text{V}$	1.225	1.270	
		$V_{\text{DIFF}} = 60\text{V}$	1.225	1.270	
Line Regulation (Note 1)	R_{LINE}	$3.0\text{V} \leq V_{\text{DIFF}} \leq 40\text{V}$, $V_{\text{out}} = V_{\text{ref}}$, $T_A = 25^{\circ}\text{C}$	-4.5	4.5	mV
		$3.3\text{V} \leq V_{\text{DIFF}} \leq 40\text{V}$, $V_{\text{out}} = V_{\text{ref}}$	-9	-9	
		$40\text{V} \leq V_{\text{DIFF}} \leq 60\text{V}$, $V_{\text{out}} = V_{\text{ref}}$, $T_A = 25^{\circ}\text{C}$	-5	5	
		$40\text{V} \leq V_{\text{DIFF}} \leq 60\text{V}$, $V_{\text{out}} = V_{\text{ref}}$	-10	10	
Load Regulation (Note 1)	R_{LOAD}	$V_{\text{DIFF}} = 3.0\text{V}$, $10\text{mA} \leq I_L \leq 500\text{mA}$, $T_A = 25^{\circ}\text{C}$	-15	15	mV
		$V_{\text{DIFF}} = 3.3\text{V}$, $10\text{mA} \leq I_L \leq 500\text{mA}$	-15	15	
		$V_{\text{DIFF}} = 40\text{V}$, $10\text{mA} \leq I_L \leq 150\text{mA}$, $T_A = 25^{\circ}\text{C}$	-15	15	
		$V_{\text{DIFF}} = 40\text{V}$, $10\text{mA} \leq I_L \leq 100\text{mA}$	-15	15	
		$V_{\text{DIFF}} = 60\text{V}$, $10\text{mA} \leq I_L \leq 20\text{mA}$	-15	15	
Thermal Regulation	V_{RTH}	$V_{\text{in}} = 14.6\text{V}$, $I_L = 300\text{mA}$ $P_d = 4.0\text{ Watts}$, $t = 20\text{ ms}$, $T_A = 25^{\circ}\text{C}$	-2	2	mV
Ripple Rejection (Note 2)	R_N	$f = 120\text{ Hz}$, $V_{\text{out}} = V_{\text{ref}}$ $C_{\text{Adj}} = 10\text{ }\mu\text{F}$, $I_{\text{out}} = 100\text{ mA}$	66		dB
Adjustment Pin Current	I_{Adj}	$V_{\text{DIFF}} = 3.0\text{V}$, $T_A = 25^{\circ}\text{C}$		100	μA
		$V_{\text{DIFF}} = 3.3\text{V}$		100	
		$V_{\text{DIFF}} = 40\text{V}$		100	
		$V_{\text{DIFF}} = 60\text{V}$		100	
Adjustment Pin Current Change	ΔI_{Adj}	$V_{\text{DIFF}} = 3.0\text{V}$, $10\text{mA} \leq I_L \leq 500\text{mA}$, $T_A = 25^{\circ}\text{C}$	-5	5	μA
		$V_{\text{DIFF}} = 3.3\text{V}$, $10\text{mA} \leq I_L \leq 500\text{mA}$	-5	5	
		$V_{\text{DIFF}} = 40\text{V}$, $10\text{mA} \leq I_L \leq 150\text{mA}$, $T_A = 25^{\circ}\text{C}$	-5	5	
		$V_{\text{DIFF}} = 40\text{V}$, $10\text{mA} \leq I_L \leq 100\text{mA}$	-5	5	
		$3.0\text{V} \leq V_{\text{DIFF}} \leq 40\text{V}$, $T_A = 25^{\circ}\text{C}$	-5	5	
		$3.3\text{V} \leq V_{\text{DIFF}} \leq 40\text{V}$	-5	5	
		$3.3\text{V} \leq V_{\text{DIFF}} \leq 60\text{V}$	-5	5	
Minimum Load Current	I_{Lmin}	$V_{\text{DIFF}} = 3.0\text{V}$, $V_{\text{out}} = 1.4\text{V}$ (forced)		5.0	mA
		$V_{\text{DIFF}} = 3.3\text{V}$, $V_{\text{out}} = 1.4\text{V}$ (forced)		5.0	
		$V_{\text{DIFF}} = 40\text{V}$, $V_{\text{out}} = 1.4\text{V}$ (forced)		5.0	
		$V_{\text{DIFF}} = 60\text{V}$, $V_{\text{out}} = 1.4\text{V}$ (forced)		7.0	
Current Limit (Note 2)	I_{CL}	$V_{\text{DIFF}} = 5\text{V}$	0.5	1.65	A
		$V_{\text{DIFF}} = 40\text{V}$, $T_A = 25^{\circ}\text{C}$	0.15	0.65	
		$V_{\text{DIFF}} = 60\text{V}$, $T_A = 25^{\circ}\text{C}$	0.02	0.28	

Notes: Please see page 34.


STANDARD APPLICATION

* C_{in} is required if regulator is located an appreciable distance from power supply filter.





** C_{O} is not needed for stability, however it does improve transient response.

$$V_{\text{out}} = 1.25\text{ V} \left(1 + \frac{R_2}{R_1}\right) + I_{\text{Adj}} R_2$$

Since I_{Adj} is controlled to less than $100\text{ }\mu\text{A}$, the error associated with this term is negligible in most applications.

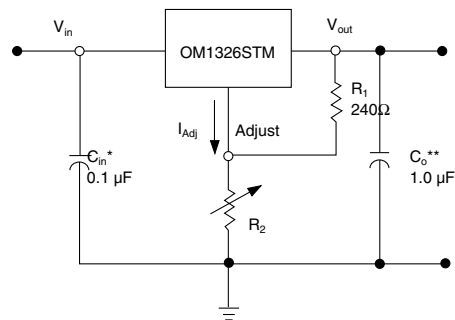**3.3**

MECHANICAL OUTLINE

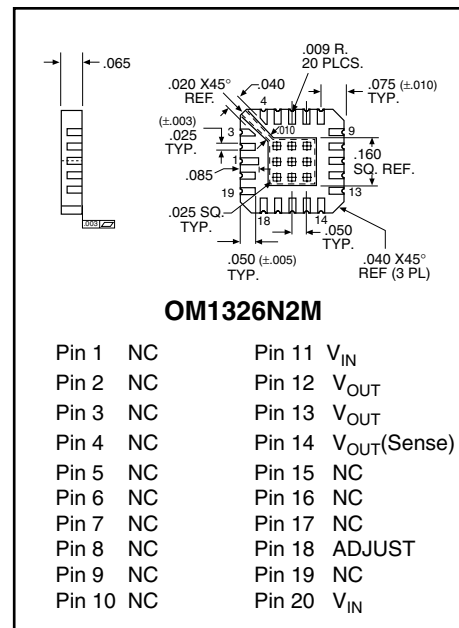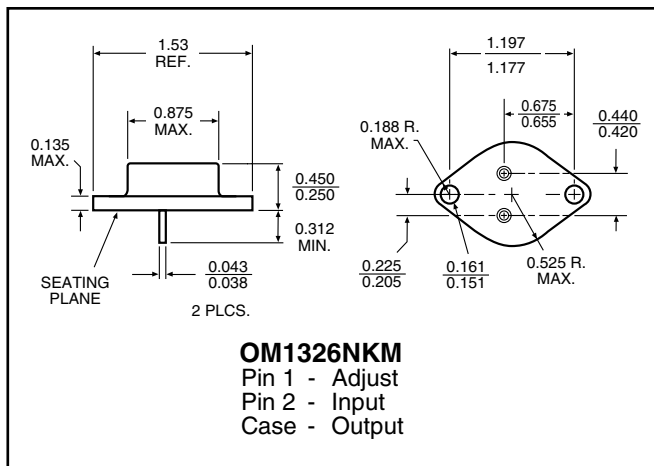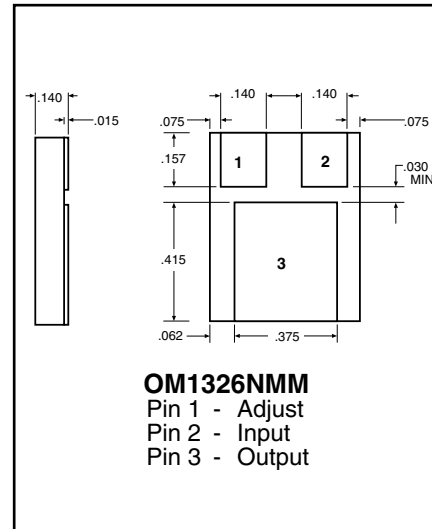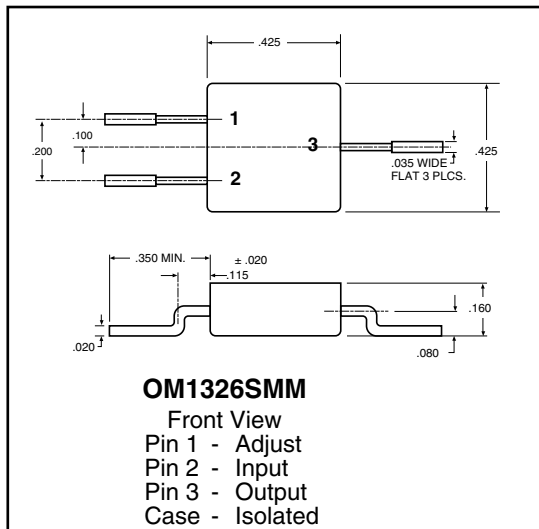

For additional information please see the mechanical outline section.