

Low-noise operational amplifiers

5534/5534A

FEATURES


- Small-signal bandwidth: 10MHz
- Output drive capability: 600Ω, 10V_{RMS} at V_S = ±18V
- Input noise voltage: 4nV/√Hz
- DC voltage gain: 100000
- AC voltage gain: 6000 at 10kHz
- Power bandwidth: 200kHz
- Slew rate: 13V/μs
- Large supply voltage range: ±3 to ±20V

DESCRIPTION

The 5534 is a high-performance low-noise operational amplifier. Compared to other operational amplifiers, such as TL083, it shows better noise performance, improved output drive capability and considerably higher small-signal and power bandwidths.

The op amps are internally compensated for again equal to, or higher than, three. The frequency response can be optimized with an external compensation capacitor for various applications (unity gain amplifier, capacitive load, slew rate, low overshoot, etc.). If very low noise is of prime importance, it is recommended that the 5534A version be used which has guaranteed noise specifications.

PIN CONFIGURATION



ORDERING INFORMATION

DESCRIPTION	ORDER CODE	PACKAGE DESIGNATOR*
8-Pin Ceramic DIP	5534/BPA	GDIP-T8
8-Pin Ceramic DIP	5534A/BPA	GDIP-T8

* MIL-STD 1835 or Appendix A of 1995 Military Data Handbook

ABSOLUTE MAXIMUM RATINGS


SYMBOL	PARAMETER	RATING ²	UNIT
V _S	Supply voltage	±22	V
V _{IN}	Input voltage	±V supply	V
V _{DIFF}	Differential input voltage ¹	±0.5	V
T _{stg}	Storage temperature range	-65 to +150	°C
T _J	Junction temperature	150	°C
tp _p	Power dissipation at 25 °C	800	mW

7110826 0085291 581

Low-noise operational amplifiers

5534/5534A

EQUIVALENT SCHEMATIC

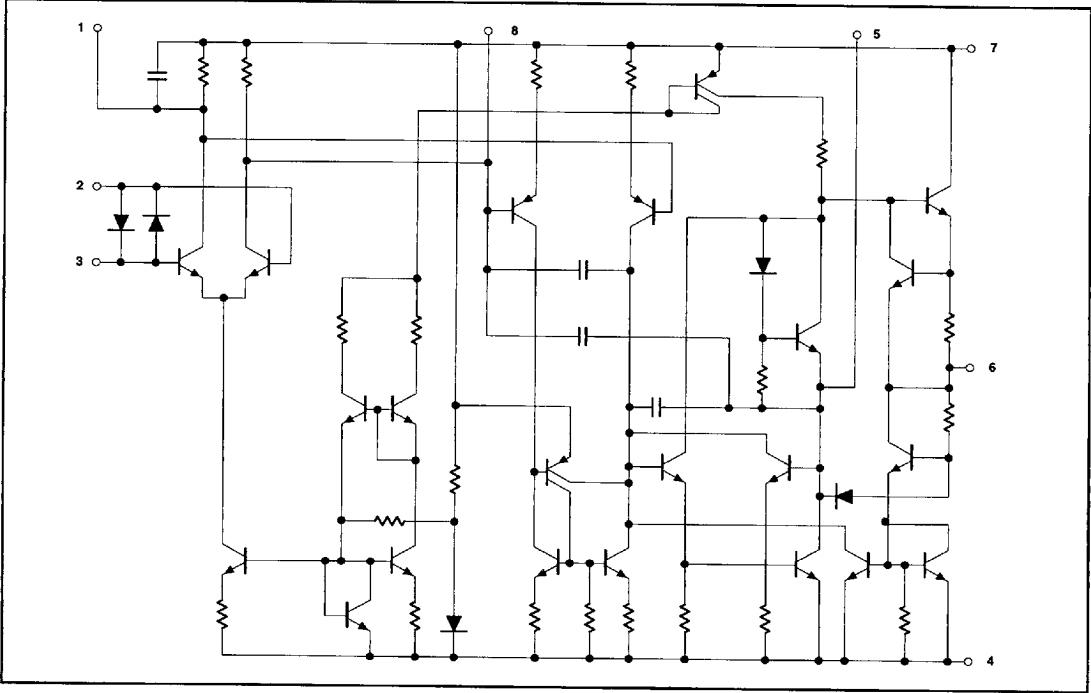

DC ELECTRICAL CHARACTERISTICS

$V_S = \pm 15V$, unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	$T_{amb} = +25^{\circ}C$			$T_{amb} = -55^{\circ}C, +125^{\circ}C$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage			0.5	2.0			3	mV
I_{IO}	Input offset current			10	200			500	nA
I_{IB}	Input bias current			400	800			1500	nA
V_{ICR}	Common mode voltage range	$R_S = 10k\Omega$	± 12	± 13		± 12			V
CMRR	Input mode rejection ratio		80	100		70			dB
PSRR	Power supply rejection ratio			10	50			100	$\mu V/V$
A_V	Large signal voltage gain	$R_L \geq 600\Omega, V_O = \pm 10V$	50	100		25			V/mV
V_O	Output voltage swing	$R_L \geq 600\Omega,$	± 12	± 13		± 10			V
		$R_L \geq 600\Omega, V_S = \pm 18V$	± 15	± 16					V
		$R_L \geq 2k\Omega, V_S = \pm 15V$	± 13	± 13.5		± 12			V
R_I	Input resistance ³		50	100					k Ω
I_{SC}	Output short-circuit current			38					mA
I_{CC}	Supply current			4	6.5			9	mA

Low-noise operational amplifiers

5534/5534A

AC ELECTRICAL CHARACTERISTICS

V_S = ± 15V, unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	T _{amb} = +25°C			T _{amb} = -55°C, +125°C			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
R _{OUT}	Output resistance	A _v = 30dB closed loop f = 10kHz, R _L = 600Ω C _C = 22pF		0.3					Ω
t _r OS	Transient response Rise time Overshoot	Voltage follower, R _L = 600Ω, C _C = 22pF, C _L = 100pF, V _I = 50mV		20					ns
				20					%
t _r OS	Transient response Rise time Overshoot	V _{IN} = 50mV, R _L = 600Ω C _C = 47pF, C _L = 500pF		50					ns
				35					%
AC	Gain	f = 10kHz, C _C = 0 f = 10kHz, C _C = 22pF		6 2.2					V/mV V/mV
GBW	Gain bandwidth product	C _C = 22pF, C _L = 100pF		10					mHz
SR	Slew rate ³	C _C = 0 C _C = 22pF	4	13					V _μ S
				6					V/mus
PBW	Power bandwidth	V _{OUT} = ±10V, C _C = 0		200					kHz
		V _{OUT} = ±10V, C _C = 22pF		95					kHz
		V _{OUT} = ±14V, R _L = 600Ω C _C = 22pF, V _{CC} = ±18V		70					kHz

ELECTRICAL CHARACTERISTICS

T_{amb} = 25°C, V_S ± 15V, unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	5533/5534			5533A/5534A			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
E _N	Input noise voltage	f _O = 30Hz		7			5.5	7	nV/√Hz
		f _O = 1kHz		4			3.5	4.5	nV/√Hz
I _N	Input noise current	f _O = 30Hz		2.5			1.5		pA/√Hz
		f _O = 1kHz		0.6			0.4		pA/√Hz
BB _N	Broadband noise figure	f = 10Hz - 20kHz, R _S = 5kΩ					0.9		dB
CS	Channel separation	f = 1kHz, R _S = 5kΩ		110			110		dB

NOTES:

1. Diodes protect the inputs against over-voltage. Therefore, unless current-limiting resistors are used, large currents will flow if the different input voltage exceeds 0.6V. Maximum current should be limited to ± 10mA.
2. Operations beyond the limits of this table may impair the useful life of the device.
3. This parameter is guaranteed, but not tested.










7110826 0085293 354

April 6, 1992

Low-noise operational amplifiers

5534/5534A

TYPICAL PERFORMANCE CHARACTERISTICS



7110826 0085294 290


April 6, 1992

495


Low-noise operational amplifiers

5534/5534A

TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

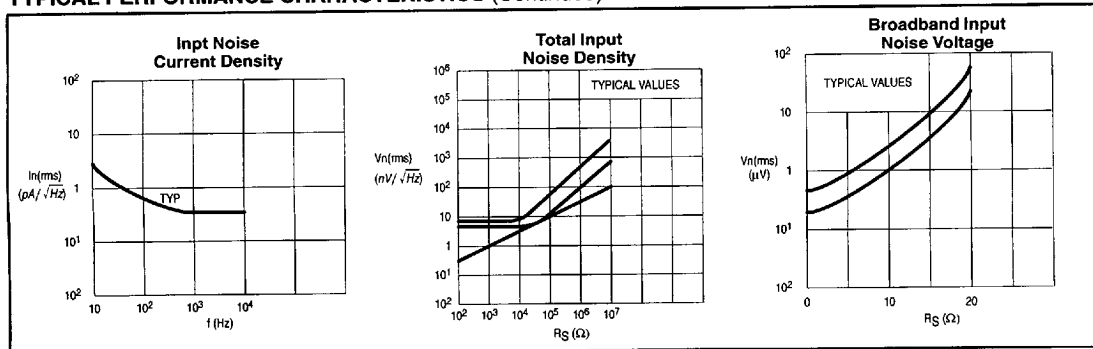

TEST LOAD CIRCUITS

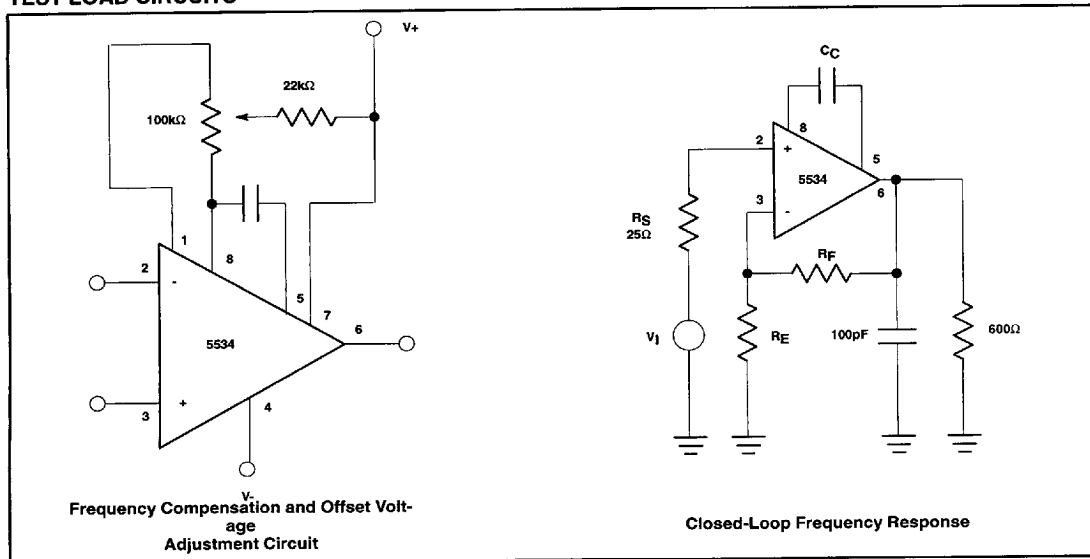

7110826 0085295 127


April 6, 1992

496

Low-noise operational amplifiers

5534/5534A

NOISE TEST BLOCK DIAGRAM

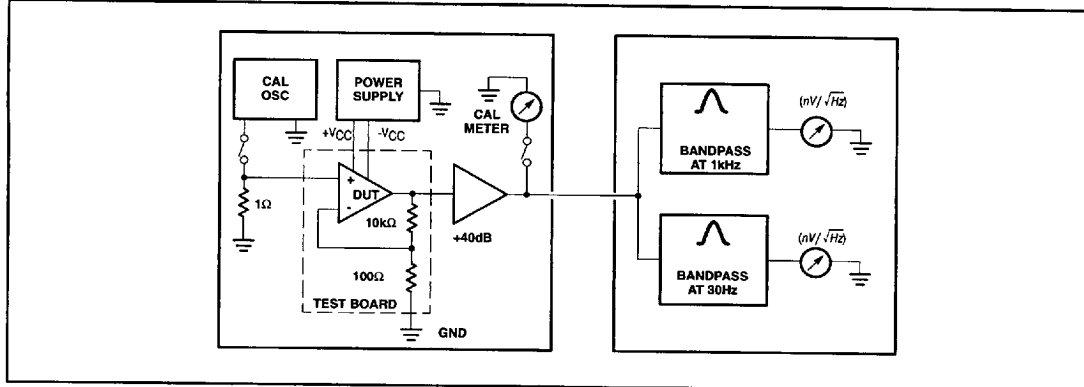

7110826 0085296 063

April 6, 1992

497