

4




3

2

1

used for:

D-SUB

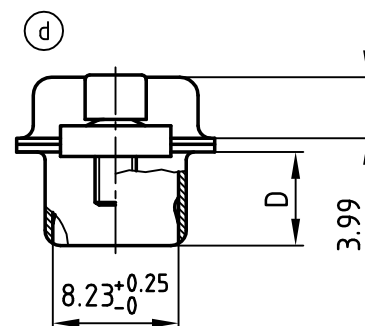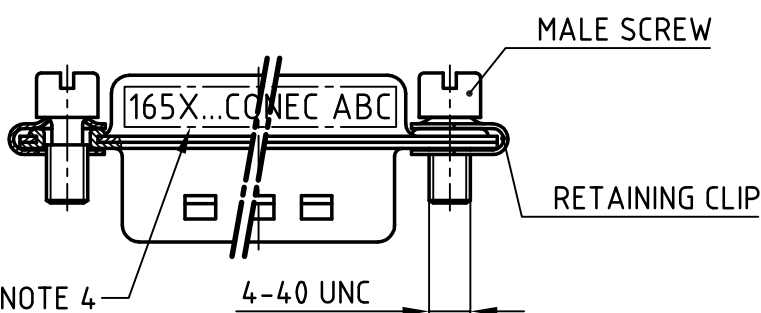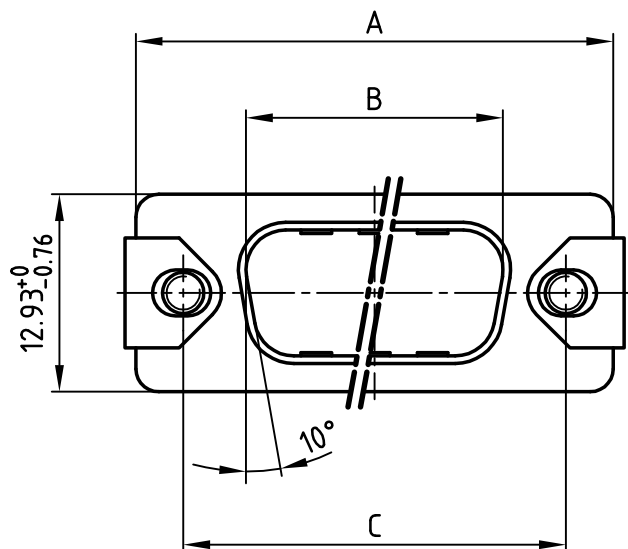

| POS. | A -0.76 | B -0.25 | C                        | D -0.3 | Part no.   |
|------|---------|---------|--------------------------|--------|------------|
| 9    | 31.19   | 16.79   | 25.00 $^{+0.12}_{-0.13}$ | 6.12   | 165X16719X |
| 15   | 39.52   | 25.12   | 33.30 $^{+0.15}_{-0.1}$  | 6.12   | 165X16729X |
| 25   | 53.42   | 38.84   | 47.04 $\pm 0.13$         | 5.99   | 165X16739X |
| 37   | 69.70   | 55.30   | 63.50 $\pm 0.13$         | 5.99   | 165X16749X |

## NOTES:

1. SCREEN CAP: STEEL; TIN PLATED

(b) (c) 2. MALE SCREW: STAINLESS STEEL

(b) (c) 3. RETAINING CLIP: STAINLESS STEEL

(d) 4. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

Directive 2002/95/EC  
"RoHS"  
Compliant


THIS DRAWING MAY NOT BE COPIED OR  
REPRODUCED IN ANY WAY, AND MAY NOT  
BE PASSED ON TO A THIRD PARTY WITHOUT  
WRITTEN PERMISSION.

OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

CONEC CORPORATION  
BRAMPTON, ONTARIO

tolerance



scale:

2:1

material:

SEE NOTES

title:

COVERED SCREEN CAP

9-37pos.

for socket connector

dwg no:

AutoCAD 2000

DIN-A

16K1A184A

4

sh: 1/1

part no:

SEE TABLE

4

3

2

1