

2SC3066

2029A

NPN Epitaxial Planar
Silicon Composite Transistor

T-29-27

Differential Amp Applications

©9768

Applications

- . Differential amp, current mirror

Features

- . Excellent in thermal equilibrium and suited for use in differential amp applications.
- . Matched pair capability.

Absolute Maximum Ratings at $T_a=25^\circ\text{C}$

			unit
Collector to Base Voltage	V_{CB0}	130	V
Collector to Emitter Voltage	V_{CE0}	120	V
Emitter to Base Current	V_{EB0}	5	V
Collector Current	I_C	50	mA
Peak Collector Current	i_{cp}	100	mA
Collector Dissipation	P_C	200	mW
Total Dissipation	P_T	400	mW
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

1 unit

Electrical Characteristics at $T_a=25^\circ\text{C}$

			min	typ	max	unit
Collector Cutoff Current	I_{CB0}	$V_{CB}=80\text{V}, I_E=0$			0.1	μA
Emitter Cutoff Current	I_{EB0}	$V_{EB}=4\text{V}, I_C=0$			0.1	μA
DC Current Gain	h_{FE}	$V_{CE}=6\text{V}, I_C=1\text{mA}$	160*		960*	
DC Current Gain Ratio	$h_{FE}^{(small/large)}$	$V_{CE}=6\text{V}, I_C=1\text{mA}$	0.85	0.98		
Base to Emitter Voltage Drop	$V_{BE}^{(large-small)}$	$V_{CE}=6\text{V}, I_C=1\text{mA}$		1.0	10	mV
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=10\text{mA}, I_B=1\text{mA}$			0.5	V
Gain-Bandwidth Product	f_T	$V_{CE}=6\text{V}, I_C=1\text{mA}$		130		MHz
Output Capacitance	c_{ob}	$V_{CB}=10\text{V}, f=1\text{MHz}$		1.6		pF


Continued on next page.

*:The 2SC3066 is classified by $h_{FE}^{(small)}$ as follows:

160	F	320	280	G	560	480	H	960
-----	---	-----	-----	---	-----	-----	---	-----

Case Outline 2029A


(unit:mm)



The 2SC3066 is provided with a surface mounted package.

Case Outline 2030A

(unit:mm)






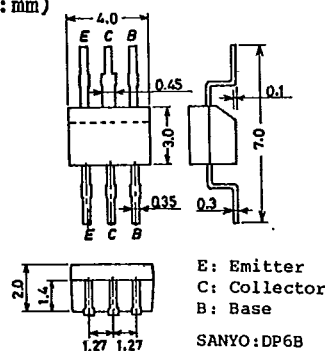


4207KI/2145KI, TS No.976-1/2

T-29-27

Continued from preceding page.

			min	typ	max	unit
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	130			V
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=1mA, R_{BE}=\infty$	120			V
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	5			V

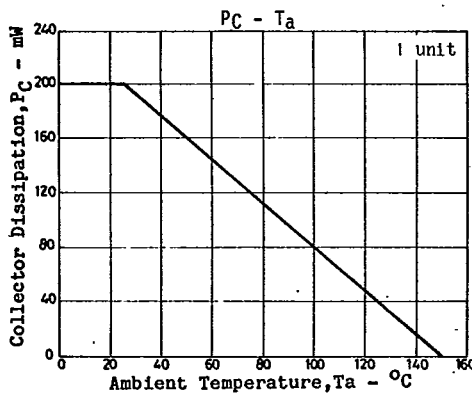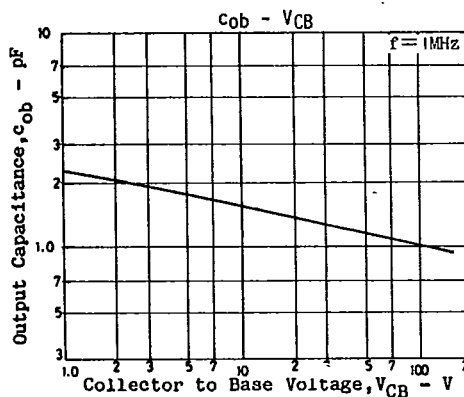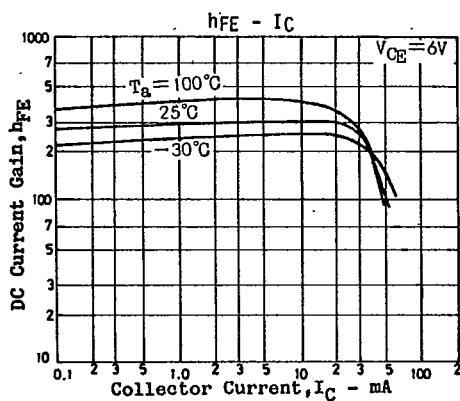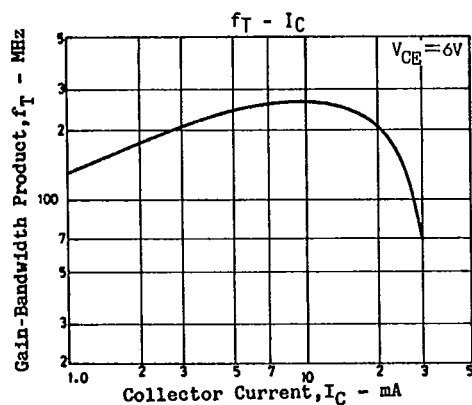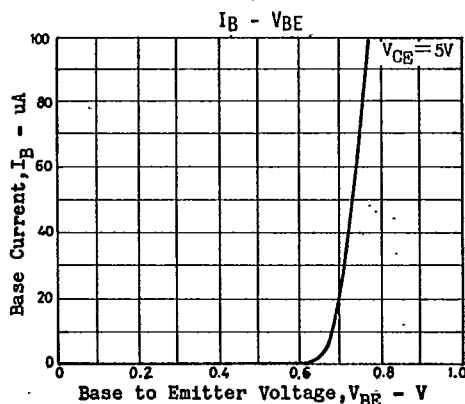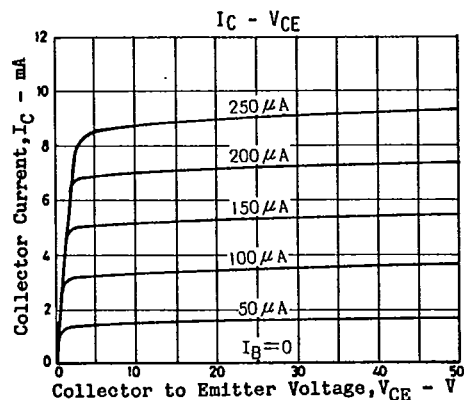


T-91-20


CASE OUTLINES OF LEAD FORMED SMALL SIGNAL TRANSISTORS

- All of Sanyo lead formed small signal transistor case outlines are illustrated below.
- All dimensions are in mm, and dimensions which are not followed by min. or max. are represented by typical values.
- No marking is indicated.


Case Outline—[2003A] unit: mm

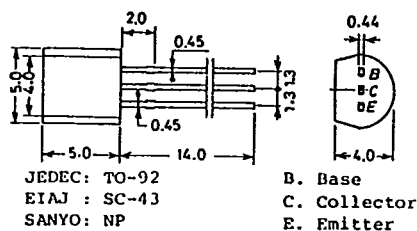


Case Outline—[2019A] unit: mm

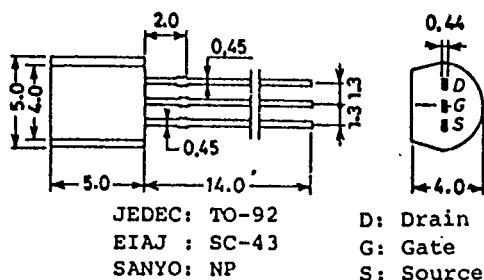


Case Outline—[2004A] unit: mm

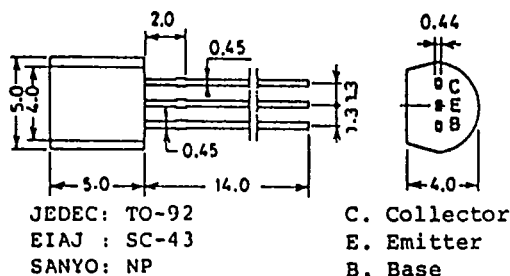


Case Outline—[2025] unit: mm




Case Outline—[2005A] unit: mm

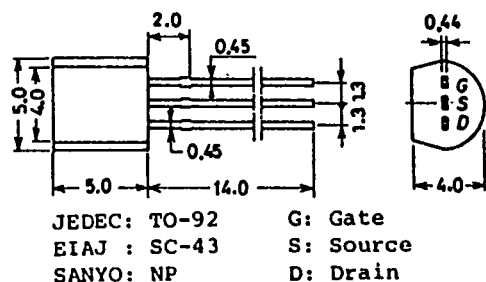


Case Outline—[2026] unit: mm




Case Outline—[2006A] unit: mm

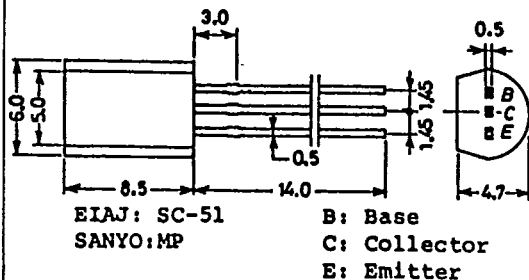


Case Outline—[2027A] unit: mm




Case Outline—[2029A] unit: mm




Case Outline—[2061] unit: mm




T-91-20




Case Outline—[2033] unit: mm

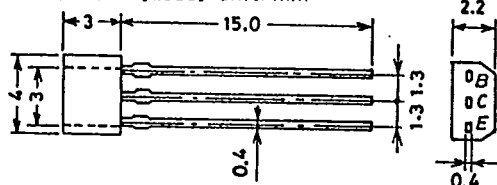


Case Outline—[2064] unit: mm



Case Outline—[2034] unit: mm

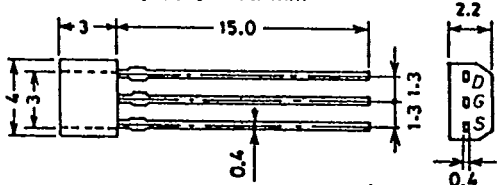

Case Outline—[2040] unit: mm

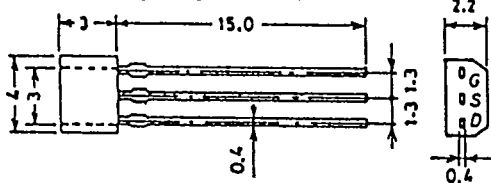

Case Outline—[2051] unit: mm

