



1. Dimensions:

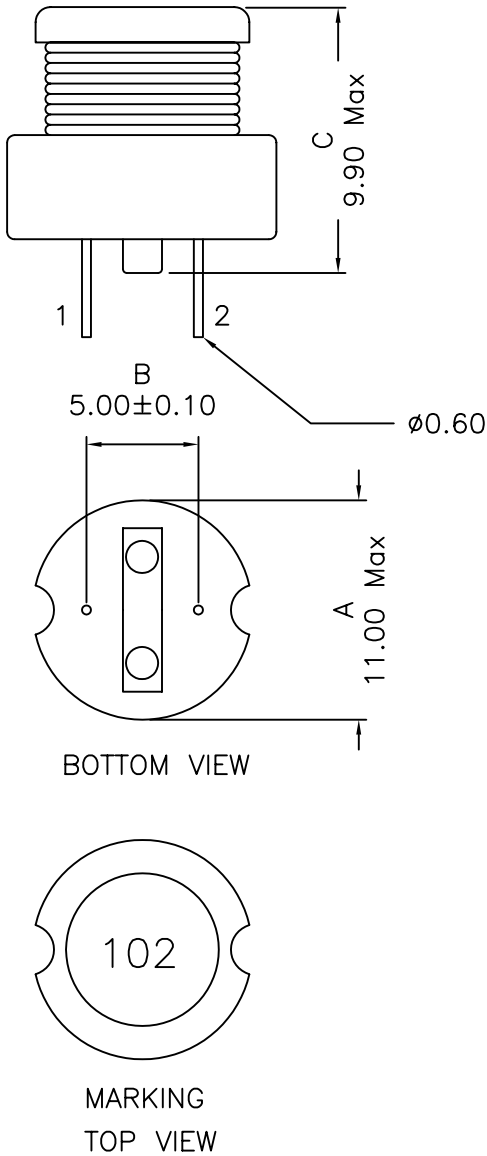

2. Schematic:



3. Electrical Specs:

OCL: $1000\mu\text{H} \pm 10\%$ @100KHz 0.25V, 0Adc
OCL: $1000\mu\text{H} \pm 20\%$ @100KHz 0.25V, 0.300Adc
DC Res.: $2.70 \pm 10\%$ Ohms

- Notes:
1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
 2. Flammability: UL94V-0
 3. ASTM oxygen index: $> 28\%$
 4. Temperature rating: 155°C . UL file E151556
 5. Operating Temp: -40°C to $+85^{\circ}\text{C}$
 6. Storage Temp: -55°C to $+125^{\circ}\text{C}$

XFMRS Inc		Title: Inductor	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.25 Dimensions in MM	P/N: 1XF00102T1M		REV A
	DWN.	罗振江	Sep-09-03
	CHK.	廖玉坤	Sep-09-03
Scale 2.5:1 SHT 1 OF 1		APP.	Isaiah M Sep-09-03