

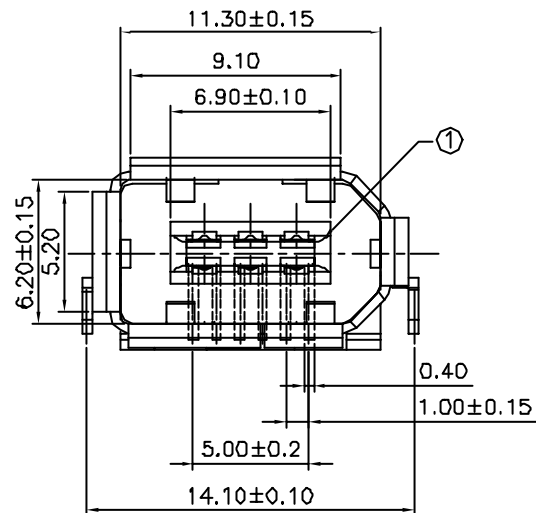
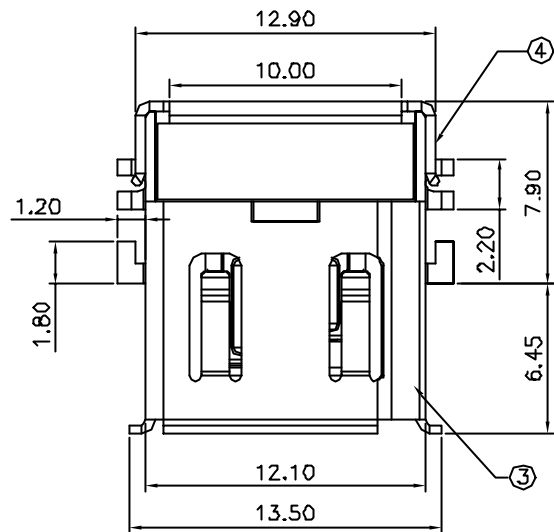


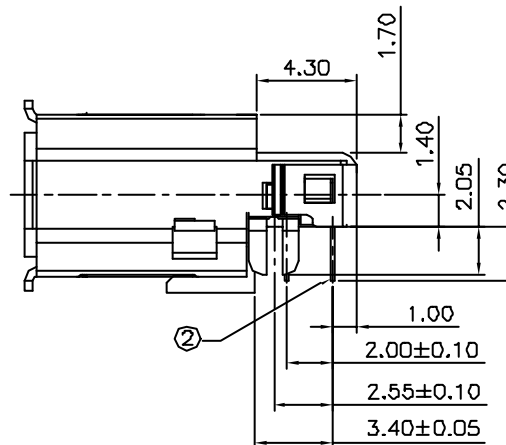

Recommended P.C.B Layout (Component Side)

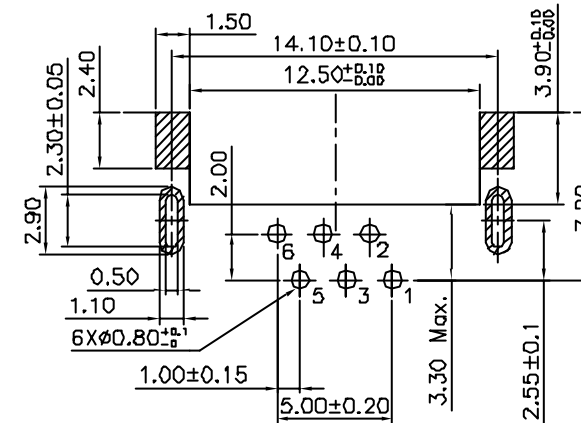

NOTE(I):

020179MRD06 01ZL

1. Selective plating

- *S1,-05u" Min. gold in contact area/
100u" Min. Tin in solder area.
- *S2,-Gold flash in contact area/
100u" Min. Tin in solder area.
- *S3,-10u" Min. gold in contact area/
100u" Min. Tin in solder area.
- *S4,-15u" Min. gold in contact area/
100u" Min. Tin in solder area.
- *S5,-30u" Min. gold in contact area/
100u" Min. Tin in solder area.
- *S6,-50u" Min. gold in contact area/
100u" Min. Tin in solder area.

4	SHELL	Brass	—	plated Nickel
3	SHELL	Brass	—	plated Nickel
2	TERMINAL	Brass	—	plated Gold/Tin
1	PLASTIC	High Temp	BLACK	UL94V-0
NO. DESCRIPTION		MATERIAL COLOR		REMARK

SUYIN
CONNECTOR

CUSTOMER COPY TITLE: IEEE-1394 Connector, Level, DIP
Type, Center height 1.35mm

PART NO.	020179MR006SX01ZL
PART NO. (OLD)	
DRAWING NO. ^D / _{NR}	020179MR006SX01ZL
SCALE	4:1
UNIT	mm
A4	

ECN (DCN) NO.	0	NEW	CHANGE	APPRO.	Angle	±2°	DRAW		
					30 ~	±0.50	DESIGN		
					10 ~ 30	±0.30	CHECK		
					~ 10	±0.15	APPRO.		
					GENERAL TOLERANCE UNLESS OTHERWISE NOTED				