

KR 2433-400-SMA 400 MHz Lowpass

General Description


KR 2433-400-SMA is a 400 MHz lowpass filter. Other pass-band frequencies are available. Please consult the factory.

Features


- SMA Connectors
- Sharp Transition to Stopband
- 60 dB Stopband to 1 GHz
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay (1 dB/div and 2 nsec/div)

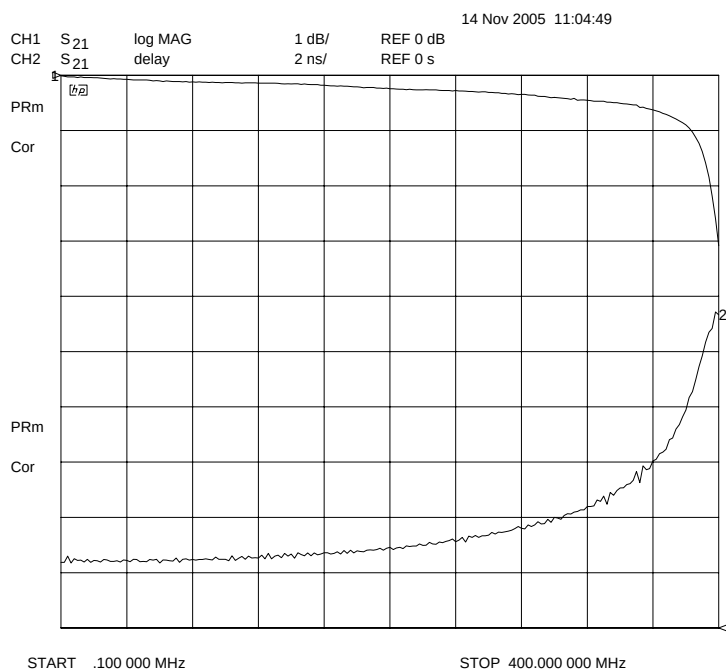

Overall Response (10 dB/div)

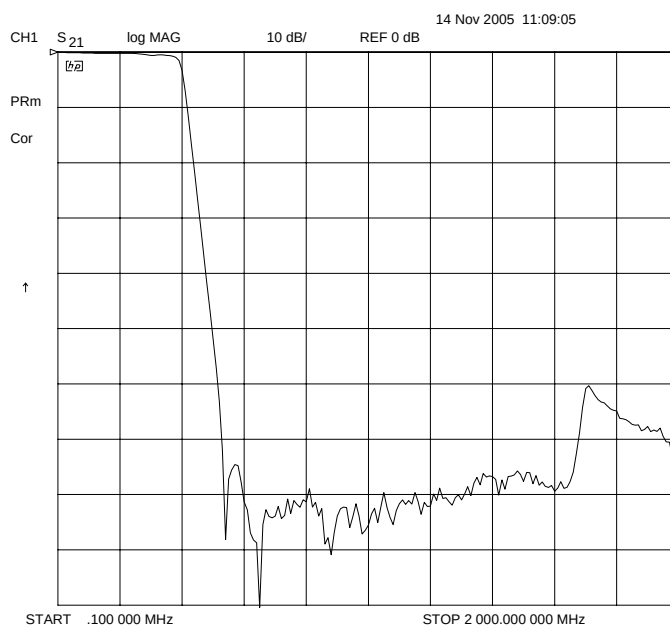

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2433-400-SMA Lowpass

Specifications

Parameter	Specification
Filter type	Lowpass
End of Passband (3 dB)	400 MHz
Attenuation at 422 MHz	12 dB $\pm$ 2 dB
Attenuation at 522 MHz	> 54 dB
Attenuation at 734 MHz to 1 GHz	> 60 dB
Source and Load	50 Ω

Physical Dimensions

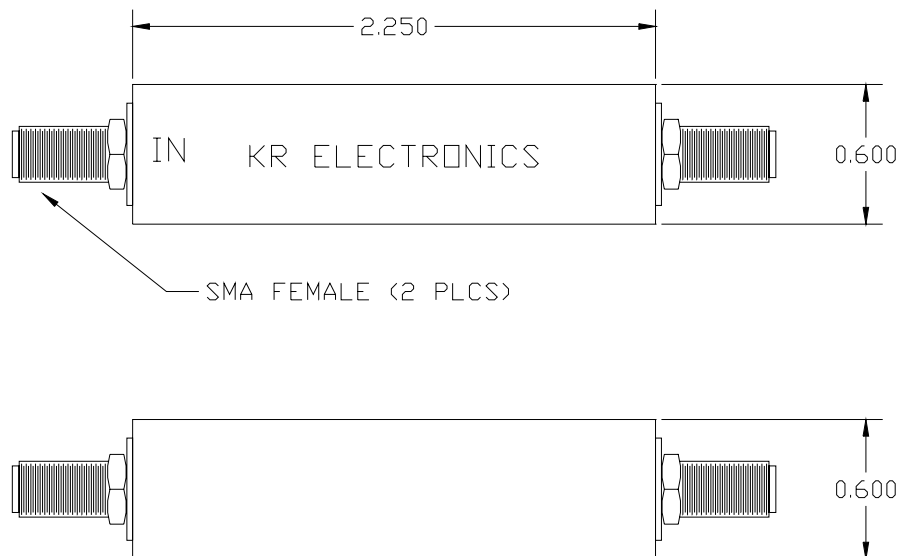

Dimensions in inches
Metal Case
Also available in surface mount package