

## KSM - 80 \*\* LM


The KSM - 80\*\*LM consist of a PIN Photodiode of high speed and a preamplifier IC in the package as an receiver for Infrared remote control systems

**FEATURES**

- One mold small package
- 2.4~6.0 Volt supply voltage, low power consumption
- Shielded against electrical field disturbance
- High immunity against ambient light
- Easy interface with the main board
- TTL and CMOS compatibility

**APPLICATIONS**

- TV, VTR, Acoustic Devices, Air Conditioners, Car Stereo Units, Computers, Interior controlling appliances, and all appliances that require remote controlling

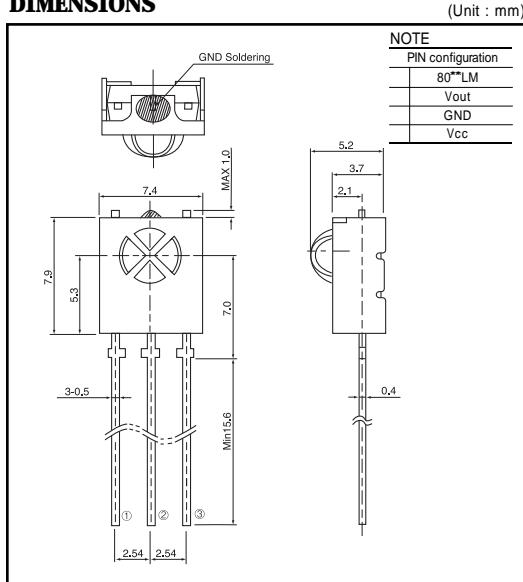**DIMENSIONS****MAXIMUM RATINGS**

(Ta=25 Unless otherwise noted)

Parameter	Symbol	Rating/AO	Unit
Supply Voltage	V <sub>cc</sub>	6.0	V
Operating Temperature	T <sub>opr.</sub>	-10 ~ +60	
Storage Temperature	T <sub>stg.</sub>	-20 ~ +75	
Soldering Temperature	T <sub>sol.</sub>	260 (Max 5 sec)	

**B.P.F CENTER FREQUENCY**

Model NO.	B.P.F Center Frequency(kHz)
KSM - 1 LM	40.0
KSM - 2 LM	36.7
KSM - 3 LM	37.9
KSM - 4 LM	32.7
KSM - 5 LM	56.9

**ELECTRO-OPTICAL CHARACTERISTICS**

(Ta=25 ), Vcc=5.0V

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit.
Supply Voltage	V <sub>cc</sub>		2.4	3.0	6.0	V
Current Consumption	I <sub>cc</sub>	Input Signal=0	-	0.7	1.5	mA
Peak Wavelength *1	p		-	940	-	nm
B.P.F Center Frequency	f <sub>o</sub>		-	37.9	-	KHz
Transmission Distance *1	L	200±50lx ±30°	10 7	- -	- -	m m
H Level Output Voltage *1	V <sub>oh</sub>	30cm over the ray axis	4.5	5.0	-	V
L Level Output Voltage *1	V <sub>ol</sub>		-	0.1	0.5	V
H Level Output Pulse Width *1	T <sub>wh</sub>	Burst Wave=600μs	500	600	700	μs
L Level Output Pulse Width *1	T <sub>wl</sub>	Period=1.2μs	500	600	700	μs
Output Form			Active Low Output			

Note : \*1. It specifies the maximum distance between emitter and detector that the output waveform satisfies the standard under the conditions below against the standard transmitter


- 1) Measuring place : Indoor without extreme reflection of light
- 2) Ambient light source : Detecting surface illumination shall be irradiate 200±50lx under ordinary white fluorescence lamp without high frequency lightning
- 3) Standard transmitter : Burst wave of standard transmitter shall be arranged to 50mVp-p under the measuring circuit

## Optic receiver modules


KSM - 80 \*\* LM

### MEASURING METHOD


#### Output Pulse Width




#### Standard Transmitter




#### Test Condition of Transmission Distance

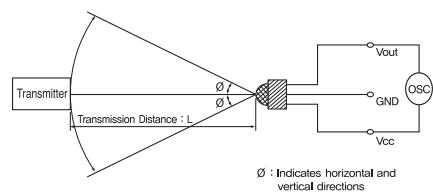


#### Relative reception distance Vs. Frequency(37.9kHz)




#### Relative reception distance Vs. Power supply voltage



#### Relative distance Vs. Supply current



#### Relative reception distance Vs. Ambient temperature

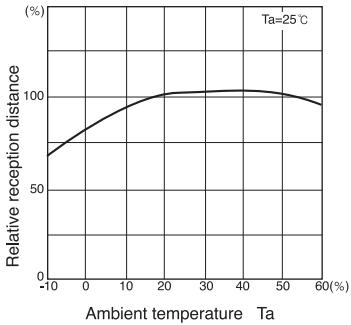

#### Radiant pattern

