




PHASE NOISE (1 Hz BW, typical)

$\mathcal{L}(f)$ (dBc/Hz)

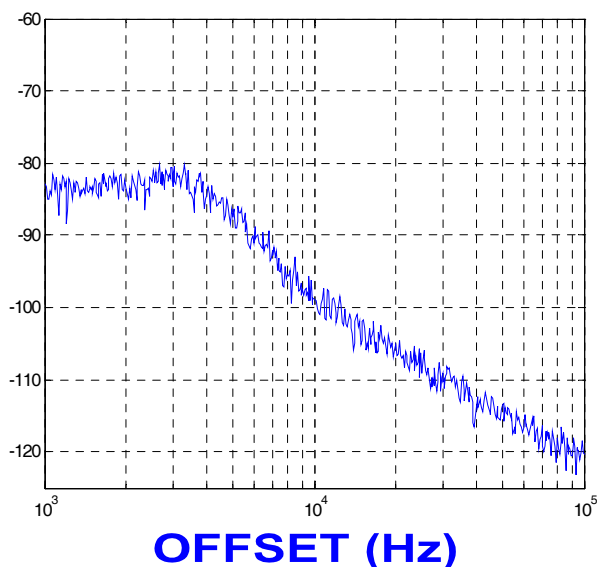


FEATURES
- Frequency Range: 2685 - 2715 MHz - Step Size: 1000 KHz - PLL - Style Package
APPLICATIONS
- Telecommunications - Satellite - Telemetry

PERFORMANCE SPECIFICATIONS	VALUE	UNITS
Frequency Range	2685 - 2715	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-100	dBc/Hz
Harmonic Suppression (2nd, typ.)	-25	dBc
Sideband Spurs (typ.)	-75	dBc
Power Output	1±2	dBm
Load Impedance	50	Ω
Step Size	1000	KHz
Charge Pump Output Current	1250	μ A
Switching Speed (typ., adjacent channel)	3	mSec
Startup Lock Time (typ.)	5	mSec
Operating Temperature Range	-40 to 85	$^{\circ}$ C
Package Style	PLL	
POWER SUPPLY REQUIREMENTS		
Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	33	mA


All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES
- AN-107 : How to Solder Z-COMM VCOs / PLLs - AN-200 : Mounting and Grounding of Z-COMM PLLs - AN-201 : PLL Fundamentals - AN-202 : PLL Functional Description
NOTES: Reference Oscillator Signal: $5 \text{ MHz} < f_{\text{osc}} < 100 \text{ MHz}$ Frequency Synthesizer: Analog Devices - ADF4106 Prescaler: 32

VCO TUNING CURVE, typ.

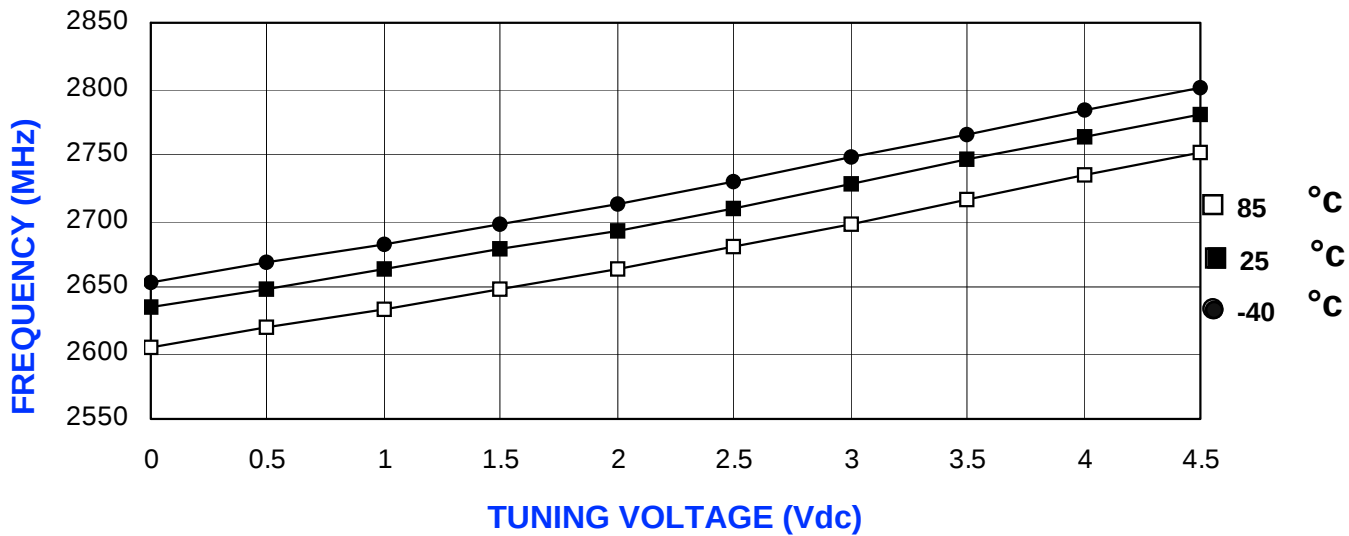

VCO POWER CURVE, typ.

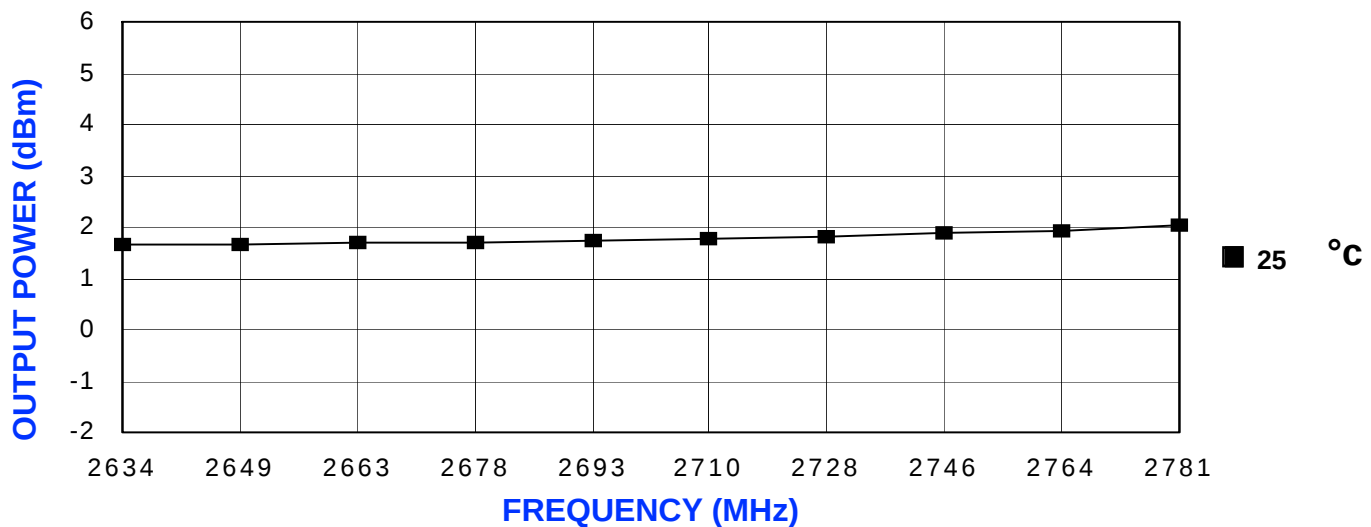

PHYSICAL DIMENSIONS

