

# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

- Direct Upgrades to TL05x, TL07x, and TL08x BiFET Operational Amplifiers
- Greater Than 2× Bandwidth (10 MHz) and 3× Slew Rate (45 V/μs) Than TL08x
- On-Chip Offset Voltage Trimming for Improved DC Performance
- Wider Supply Rails Increase Dynamic Signal Range to ±19 V

## description

The TLE208x series of JFET-input operational amplifiers more than double the bandwidth and triple the slew rate of the TL07x and TL08x families of BiFET operational amplifiers. The TLE208x also have wider supply-voltage rails, increasing the dynamic-signal range for BiFET circuits to ±19 V. On-chip zener trimming of offset voltage yields precision grades for greater accuracy in dc-coupled applications. The TLE208x are pin-compatible with lower performance BiFET operational amplifiers for ease in improving performance in existing designs.

BiFET operational amplifiers offer the inherently higher input impedance of the JFET-input transistors, without sacrificing the output drive associated with bipolar amplifiers. This makes these amplifiers better suited for interfacing with high-impedance sensors or very low level ac signals. They also feature inherently better ac response than bipolar or CMOS devices having comparable power consumption.

Because BiFET operational amplifiers are designed for use with dual power supplies, care must be taken to observe common-mode input-voltage limits and output voltage swing when operating from a single supply. DC biasing of the input signal is required and loads should be terminated to a virtual ground node at mid-supply. Texas Instruments TLE2426 integrated virtual ground generator is useful when operating BiFET amplifiers from single supplies.

The TLE208x are fully specified at ±15 V and ±5 V. For operation in low-voltage and/or single-supply systems, Texas Instruments LinCMOS™ families of operational amplifiers (TLC- and TLV-prefix) are recommended. When moving from BiFET to CMOS amplifiers, particular attention should be paid to slew rate and bandwidth requirements and output loading.

For BiFET circuits requiring low noise and/or tighter dc precision, the TLE207x offer the same ac response as the TLE208x with more stringent dc and noise specifications.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

LinCMOS is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2000, Texas Instruments Incorporated

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

#### TLE2081 AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGED DEVICES        |                           |                           |                         | CHIP<br>FORM<br>(Y) |
|----------------|--------------------------------|-------------------------|---------------------------|---------------------------|-------------------------|---------------------|
|                |                                | SMALL<br>OUTLINE<br>(D) | CHIP<br>CARRIER<br>(FK)   | CERAMIC<br>DIP<br>(JG)    | PLASTIC<br>DIP<br>(P)   |                     |
| 0°C to 70°C    | 3 mV<br>6 mV                   | TLE2081ACD<br>TLE2081CD | —                         | —                         | TLE2081ACP<br>TLE2081CP | —<br>TLE2081Y       |
| –55°C to 125°C | 3 mV<br>6 mV                   | —                       | TLE2081AMFK<br>TLE2081MFK | TLE2081AMJG<br>TLE2081MJG | —                       | —                   |

† The D packages are available taped and reeled. Add R suffix to device type (e.g., TLE2081ACDR).

‡ Chip forms are tested at T<sub>A</sub> = 25°C only.

#### TLE2082 AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGED DEVICES        |                           |                           |                         | CHIP FORM<br>(Y) |
|----------------|--------------------------------|-------------------------|---------------------------|---------------------------|-------------------------|------------------|
|                |                                | SMALL<br>OUTLINE<br>(D) | CHIP<br>CARRIER<br>(FK)   | CERAMIC<br>DIP<br>(JG)    | PLASTIC<br>DIP<br>(P)   |                  |
| 0°C to 70°C    | 4 mV<br>7 mV                   | TLE2082ACD<br>TLE2082CD | —                         | —                         | TLE2082ACP<br>TLE2082CP | —                |
| –40°C to 85°C  | 4 mV<br>7 mV                   | TLE2082AID<br>TLE2082ID | —                         | —                         | TLE2082AIP<br>TLE2082IP | TLE2082Y         |
| –55°C to 125°C | 4 mV<br>7 mV                   | TLE2082AMD<br>TLE2082MD | TLE2082AMFK<br>TLE2082MFK | TLE2082AMJG<br>TLE2082MJG | TLE2082AMP<br>TLE2082MP | —                |

† The D packages are available taped and reeled. Add R suffix to device type (e.g., TLE2082ACDR).

‡ Chip forms are tested at T<sub>A</sub> = 25°C only.

#### TLE2084 AVAILABLE OPTIONS


| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGED DEVICES          |                           |                         |                         | CHIP<br>FORM<br>(Y) |
|----------------|--------------------------------|---------------------------|---------------------------|-------------------------|-------------------------|---------------------|
|                |                                | SMALL<br>OUTLINE<br>(DW)  | CHIP<br>CARRIER<br>(FK)   | CERAMIC<br>DIP<br>(J)   | PLASTIC<br>DIP<br>(N)   |                     |
| 0°C to 70°C    | 4 mV<br>7 mV                   | TLE2084ACDW<br>TLE2084CDW | —                         | —                       | TLE2084ACN<br>TLE2084CN | —<br>TLE2084Y       |
| –55°C to 125°C | 4 mV<br>7 mV                   | —                         | TLE2084AMFK<br>TLE2084MFK | TLE2084AMJ<br>TLE2084MJ | —                       | —                   |

† The DW packages are available taped and reeled. Add R suffix to device type (e.g., TLE2084ACDWR).

‡ Chip forms are tested at T<sub>A</sub> = 25°C only.


# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

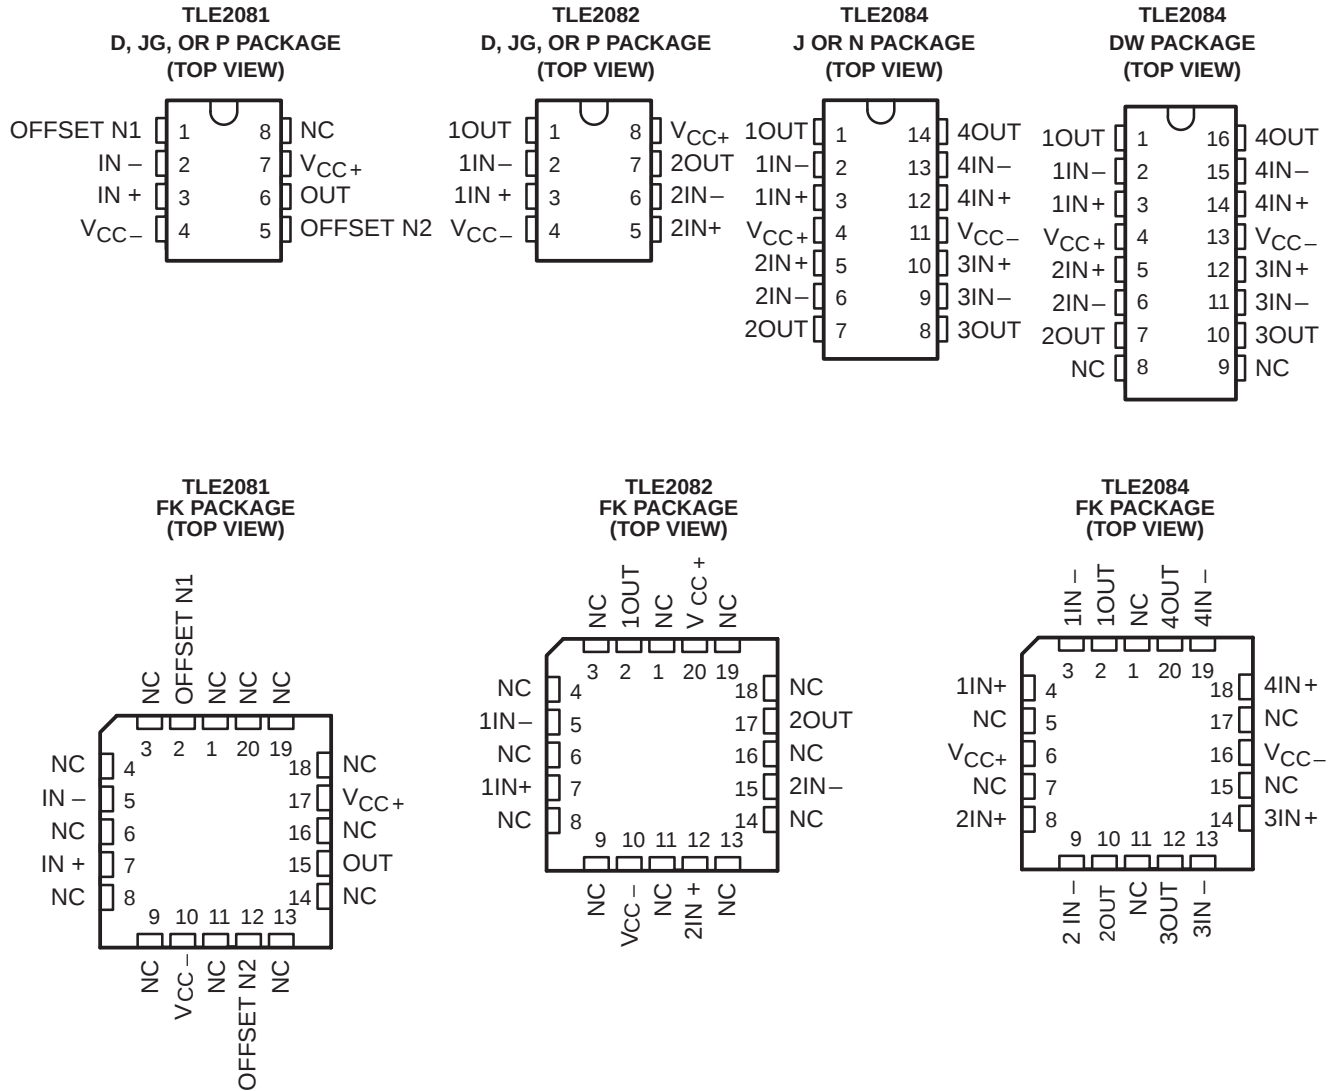

NC – No internal connection

## symbol





# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## TLE2081Y chip information

This chip, when properly assembled, displays characteristics similar to the TLE2081. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

BONDING PAD ASSIGNMENTS

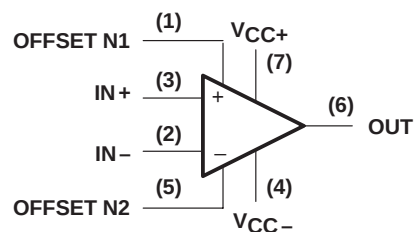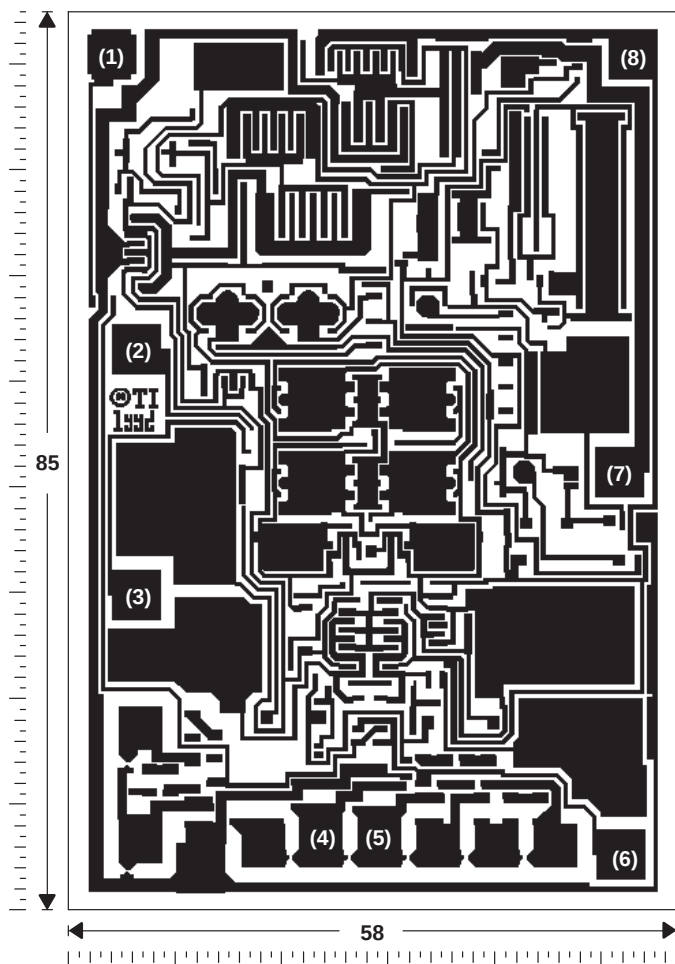

CHIP THICKNESS: 15 TYPICAL

BONDING PADS:  $4 \times 4$  MINIMUM

$T_{jmax} = 150^{\circ}\text{C}$

TOLERANCES ARE  $\pm 10\%$ .

ALL DIMENSIONS ARE IN MILS.


PIN (4) IS INTERNALLY CONNECTED  
TO BACKSIDE OF THE CHIP.

**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2082Y chip information**

This chip, when properly assembled, displays characteristics similar to the TLE2082. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

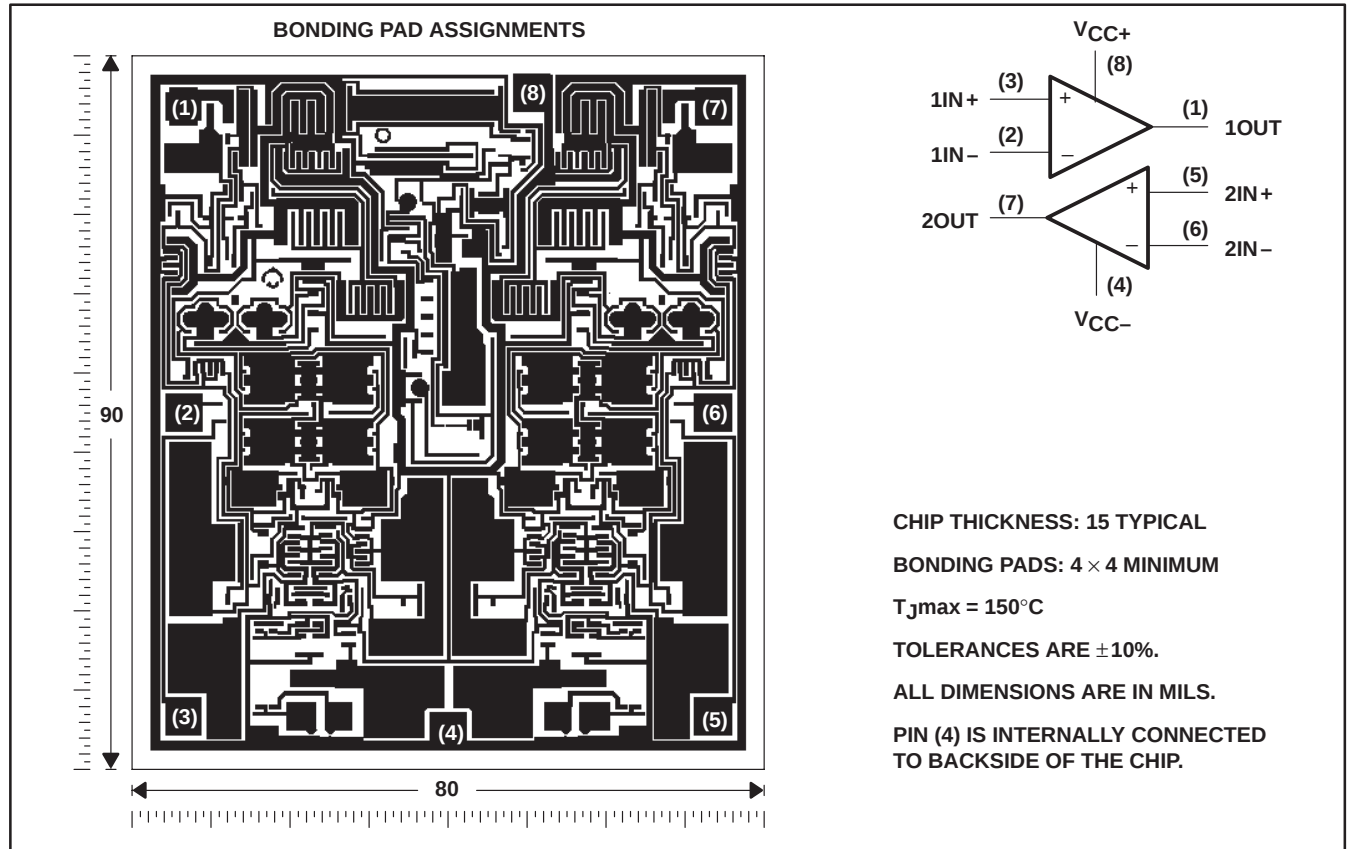


# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS


SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## TLE2084Y chip information

This chip, when properly assembled, displays characteristics similar to the TLE2084. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

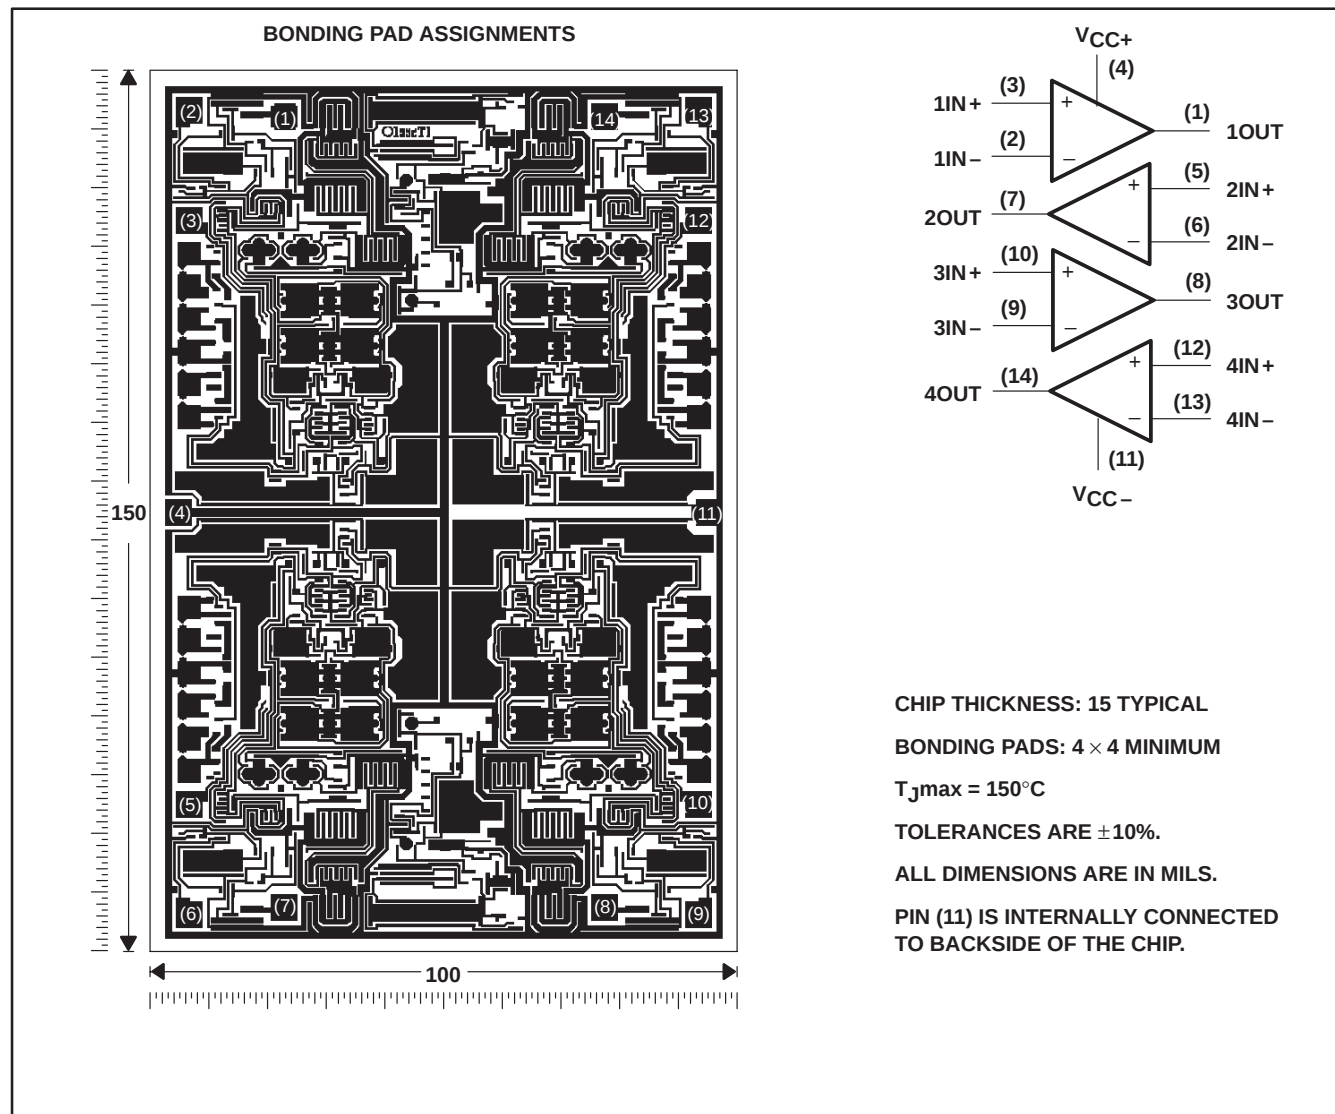

equivalent schematic (each channel)

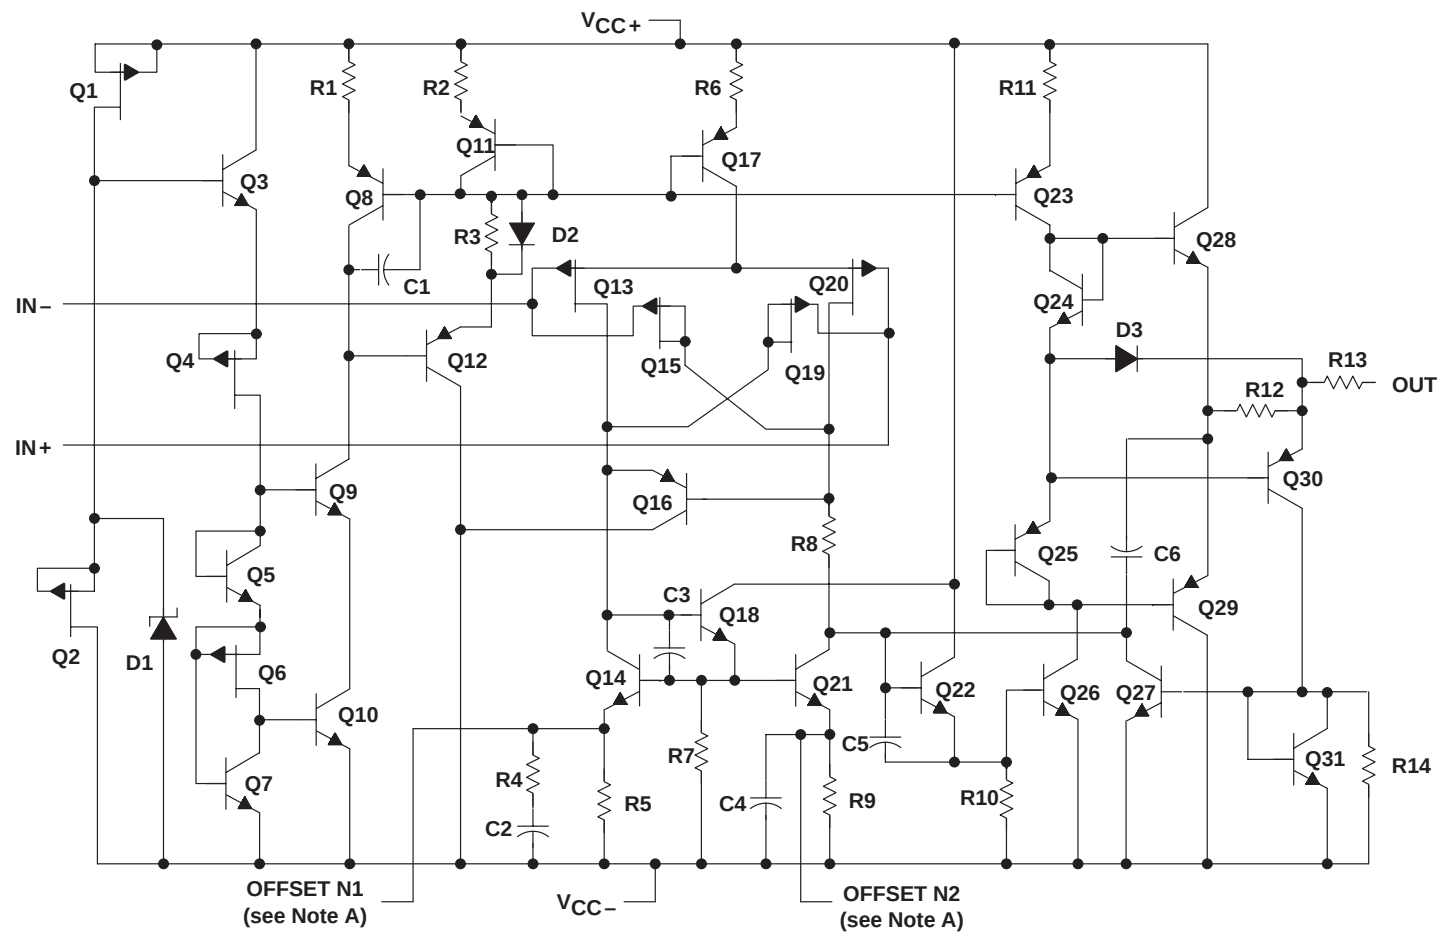

NOTE A: OFFSET N1 AND OFFSET N2 are only available on the TLE2081x devices.

| ACTUAL DEVICE COMPONENT COUNT |         |         |         |
|-------------------------------|---------|---------|---------|
| COMPONENT                     | TLE2081 | TLE2082 | TLE2084 |
| Transistors                   | 33      | 57      | 114     |
| Resistors                     | 25      | 37      | 74      |
| Diodes                        | 8       | 5       | 10      |
| Capacitors                    | 6       | 11      | 22      |

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|                                                                               |                              |
|-------------------------------------------------------------------------------|------------------------------|
| Supply voltage, $V_{CC+}$ (see Note 1)                                        | 19 V                         |
| Supply voltage, $V_{CC-}$ (see Note 1)                                        | –19 V                        |
| Differential input voltage range, $V_{ID}$ (see Note 2)                       | $V_{CC+}$ to $V_{CC-}$       |
| Input voltage range, $V_I$ (any input)                                        | $V_{CC+}$ to $V_{CC-}$       |
| Input current, $I_I$ (each input)                                             | $\pm 1$ mA                   |
| Output current, $I_O$ (each output)                                           | $\pm 80$ mA                  |
| Total current into $V_{CC+}$                                                  | 160 mA                       |
| Total current out of $V_{CC-}$                                                | 160 mA                       |
| Duration of short-circuit current at (or below) 25°C (see Note 3)             | unlimited                    |
| Continuous total dissipation                                                  | See Dissipation Rating Table |
| Operating free-air temperature range, $T_A$ : C suffix                        | 0°C to 70°C                  |
| I suffix                                                                      | –40°C to 85°C                |
| M suffix                                                                      | –55°C to 125°C               |
| Storage temperature range                                                     | –65°C to 150°C               |
| Case temperature for 60 seconds: FK package                                   | 260°C                        |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: DW or N package | 260°C                        |
| Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: J package       | 300°C                        |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between  $V_{CC+}$  and  $V_{CC-}$ .

2. Differential voltages are at  $IN+$  with respect to  $IN-$ .

3. The output can be shorted to either supply. Temperatures and/or supply voltages must be limited to ensure that the maximum dissipation rate is not exceeded.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING | $T_A = 125^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|------------------------------------------|-------------------------------------------|
| D       | 725 mW                                      | 5.8 mW/°C                                         | 464 mW                                   | 377 mW                                   | 145 mW                                    |
| DW      | 1025 mW                                     | 8.2 mW/°C                                         | 656 mW                                   | 533 mW                                   | 205 mW                                    |
| FK      | 1375 mW                                     | 11.0 mW/°C                                        | 880 mW                                   | 715 mW                                   | 275 mW                                    |
| J       | 1375 mW                                     | 11.0 mW/°C                                        | 880 mW                                   | 715 mW                                   | 275 mW                                    |
| JG      | 1050 mW                                     | 8.4 mW/°C                                         | 672 mW                                   | 546 mW                                   | 210 mW                                    |
| N       | 1150 mW                                     | 9.2 mW/°C                                         | 736 mW                                   | 598 mW                                   | 230 mW                                    |
| P       | 1000 mW                                     | 8.0 mW/°C                                         | 640 mW                                   | 344 mW                                   | 200 mW                                    |

#### recommended operating conditions

|                                       |                        | C SUFFIX |     | I SUFFIX |     | M SUFFIX |     | UNIT |
|---------------------------------------|------------------------|----------|-----|----------|-----|----------|-----|------|
|                                       |                        | MIN      | MAX | MIN      | MAX | MIN      | MAX |      |
| Supply voltage, $V_{CC\pm}$           |                        | ±2.25    | ±19 | ±2.25    | ±19 | ±2.25    | ±19 | V    |
| Common-mode input voltage, $V_{IC}$   | $V_{CC\pm} = \pm 5$ V  | –0.9     | 5   | –0.8     | 5   | –0.8     | 5   | V    |
|                                       | $V_{CC\pm} = \pm 15$ V | –10.9    | 15  | –10.8    | 15  | –10.8    | 15  |      |
| Operating free-air temperature, $T_A$ |                        | 0        | 70  | –40      | 85  | –55      | 125 | °C   |



**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2081C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                             | $T_A^\dagger$             | TLE2081C   |           |     | TLE2081AC |           |     | UNIT                         |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------|------------|-----------|-----|-----------|-----------|-----|------------------------------|
|                                                                                 |                                                                             |                           | MIN        | TYP       | MAX | MIN       | TYP       | MAX |                              |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, V_O = 0, R_S = 50\ \Omega$                                     | 25°C                      | 0.34       | 6         |     | 0.3       | 3         |     | mV                           |
|                                                                                 |                                                                             | Full range                |            |           | 8   |           |           | 5   |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                                             | Full range                | 3.2        | 29        |     | 3.2       | 29        |     | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                                   | $V_{IC} = 0, V_O = 0, \text{See Figure 4}$                                  | 25°C                      | 5          | 100       |     | 5         | 100       |     | nA                           |
|                                                                                 |                                                                             | Full range                |            |           | 1.4 |           |           | 1.4 |                              |
| $I_{IB}$ Input bias current                                                     |                                                                             | 25°C                      | 15         | 175       |     | 15        | 175       |     | nA                           |
|                                                                                 |                                                                             | Full range                |            |           | 5   |           |           | 5   |                              |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50\ \Omega$                                                          | 25°C                      | 5 to -1    | 5 to -1.9 |     | 5 to -1   | 5 to -1.9 |     | V                            |
|                                                                                 |                                                                             | Full range                | 5 to -0.9  |           |     | 5 to -0.9 |           |     |                              |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -200\ \mu\text{A}$                                                   | 25°C                      | 3.8        | 4.1       |     | 3.8       | 4.1       |     | V                            |
|                                                                                 |                                                                             | Full range                | 3.7        |           |     | 3.7       |           |     |                              |
|                                                                                 | $I_O = -2\text{ mA}$                                                        | 25°C                      | 3.5        | 3.9       |     | 3.5       | 3.9       |     |                              |
|                                                                                 |                                                                             | Full range                | 3.4        |           |     | 3.4       |           |     |                              |
|                                                                                 | $I_O = -20\text{ mA}$                                                       | 25°C                      | 1.5        | 2.3       |     | 1.5       | 2.3       |     |                              |
|                                                                                 |                                                                             | Full range                | 1.5        |           |     | 1.5       |           |     |                              |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 200\ \mu\text{A}$                                                    | 25°C                      | -3.5       | -4.2      |     | -3.5      | -4.2      |     | V                            |
|                                                                                 |                                                                             | Full range                | -3.4       |           |     | -3.4      |           |     |                              |
|                                                                                 | $I_O = 2\text{ mA}$                                                         | 25°C                      | -3.7       | -4.1      |     | -3.7      | -4.1      |     |                              |
|                                                                                 |                                                                             | Full range                | -3.6       |           |     | -3.6      |           |     |                              |
|                                                                                 | $I_O = 20\text{ mA}$                                                        | 25°C                      | -1.5       | -2.4      |     | -1.5      | -2.4      |     |                              |
|                                                                                 |                                                                             | Full range                | -1.5       |           |     | -1.5      |           |     |                              |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 2.3\text{ V}$                                                    | $R_L = 600\ \Omega$       | 25°C       | 80        | 91  | 80        | 91        |     | dB                           |
|                                                                                 |                                                                             |                           | Full range | 79        |     | 79        |           |     |                              |
|                                                                                 |                                                                             | $R_L = 2\text{ k}\Omega$  | 25°C       | 90        | 100 | 90        | 100       |     |                              |
|                                                                                 |                                                                             |                           | Full range | 89        |     | 89        |           |     |                              |
|                                                                                 |                                                                             | $R_L = 10\text{ k}\Omega$ | 25°C       | 95        | 106 | 95        | 106       |     |                              |
|                                                                                 |                                                                             |                           | Full range | 94        |     | 94        |           |     |                              |
| $r_i$ Input resistance                                                          | $V_{IC} = 0$                                                                | 25°C                      | $10^{12}$  |           |     | $10^{12}$ |           |     | $\Omega$                     |
| $c_i$ Input capacitance                                                         | $V_{IC} = 0, \text{See Figure 5}$                                           | Common mode               | 25°C       | 11        |     | 11        |           |     | pF                           |
|                                                                                 |                                                                             | Differential              | 25°C       | 2.5       |     | 2.5       |           |     |                              |
| $z_o$ Open-loop output impedance                                                | $f = 1\text{ MHz}$                                                          | 25°C                      | 80         |           |     | 80        |           |     | $\Omega$                     |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICR\min}, V_O = 0, R_S = 50\ \Omega$                           | 25°C                      | 70         | 89        |     | 70        | 89        |     | dB                           |
|                                                                                 |                                                                             | Full range                | 68         |           |     | 68        |           |     |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\text{ V to } \pm 15\text{ V}, V_O = 0, R_S = 50\ \Omega$ | 25°C                      | 82         | 99        |     | 82        | 99        |     | dB                           |
|                                                                                 |                                                                             | Full range                | 80         |           |     | 80        |           |     |                              |

$^\dagger$  Full range is 0°C to 70°C.

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2081C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V (unless otherwise noted) (continued)**

| PARAMETER                             | TEST CONDITIONS     | $T_A^\dagger$   | TLE2081C |     |     | TLE2081AC |     |     | UNIT |
|---------------------------------------|---------------------|-----------------|----------|-----|-----|-----------|-----|-----|------|
|                                       |                     |                 | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| $I_{CC}$ Supply current               | $V_O = 0$ , No load | 25°C            | 1.35     | 1.6 | 2.2 | 1.35      | 1.6 | 2.2 | mA   |
|                                       |                     | Full range      |          |     | 2.2 |           |     | 2.2 |      |
| $I_{OS}$ Short-circuit output current | $V_O = 0$           | $V_{ID} = 1$ V  |          | –35 |     |           | –35 |     | mA   |
|                                       |                     | $V_{ID} = -1$ V |          | 45  |     |           | 45  |     |      |

$^\dagger$  Full range is 0°C to 70°C.

**TLE2081C operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                       |                     | T <sub>A</sub> <sup>†</sup> | TLE2081C |     |     | TLE2081AC |     |     | UNIT   |
|--------------------|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|---------------------|-----------------------------|----------|-----|-----|-----------|-----|-----|--------|
|                    |                                             |                                                                                                                       |                     |                             | MIN      | TYP | MAX | MIN       | TYP | MAX |        |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = ±2.3 V,<br>A <sub>VD</sub> = −1, R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 100 pF, See Figure 1 |                     | 25°C                        | 35       |     |     | 35        |     |     | V/μs   |
|                    |                                             |                                                                                                                       |                     | Full range                  | 23       |     |     | 23        |     |     |        |
| SR −               | Negative slew rate                          |                                                                                                                       |                     | 25°C                        | 38       |     |     | 38        |     |     | V/μs   |
|                    |                                             |                                                                                                                       |                     | Full range                  | 23       |     |     | 23        |     |     |        |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1, 2-V step,<br>R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 100 pF                                     | To 10 mV            | 25°C                        | 0.25     |     |     | 0.25      |     |     | μs     |
|                    |                                             |                                                                                                                       | To 1 mV             |                             | 0.4      |     |     | 0.4       |     |     |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω, See Figure 3                                                                                   | f = 10 Hz           | 25°C                        | 28       |     |     | 28        |     |     | nV/√Hz |
|                    |                                             |                                                                                                                       | f = 10 kHz          |                             | 11.6     |     |     | 11.6      |     |     |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                                       | f = 10 Hz to 10 kHz | 25°C                        | 6        |     |     | 6         |     |     | μV     |
|                    |                                             |                                                                                                                       | f = 0.1 Hz to 10 Hz |                             | 0.6      |     |     | 0.6       |     |     |        |
| I <sub>n</sub>     | Equivalent input noise current              | V <sub>IC</sub> = 0, f = 10 kHz                                                                                       |                     | 25°C                        | 2.8      |     |     | 2.8       |     |     | fA/√Hz |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 5 V, A <sub>VD</sub> = 10, f = 1 kHz, R <sub>L</sub> = 2 kΩ, R <sub>S</sub> = 25 Ω               |                     | 25°C                        | 0.013%   |     |     | 0.013%    |     |     |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF, R <sub>L</sub> = 2 kΩ, See Figure 2                                   | 25°C                | 9.4                         |          |     | 9.4 |           |     | MHz |        |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 4 V, A <sub>VD</sub> = −1, R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 25 pF                         | 25°C                | 2.8                         |          |     | 2.8 |           |     | MHz |        |
| φ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF, R <sub>L</sub> = 2 kΩ, See Figure 2                                   | 25°C                | 56°                         |          |     | 56° |           |     |     |        |

$^\dagger$  Full range is 0°C to 70°C.



**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2081C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                              | $T_A^\dagger$              | TLE2081C    |             |     | TLE2081AC   |             |     | UNIT             |
|---------------------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------|-------------|-------------|-----|-------------|-------------|-----|------------------|
|                                                                                 |                                                                              |                            | MIN         | TYP         | MAX | MIN         | TYP         | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, V_O = 0, R_S = 50 \Omega$                                       | 25°C                       |             | 0.49        | 6   |             | 0.47        | 3   | mV               |
|                                                                                 |                                                                              | Full range                 |             |             | 8   |             |             | 5   |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                                              | Full range                 |             | 3.2         | 29  |             | 3.2         | 29  | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   | $V_{IC} = 0, V_O = 0, \text{See Figure 4}$                                   | 25°C                       |             | 6           | 100 |             | 6           | 100 | nA               |
|                                                                                 |                                                                              | Full range                 |             |             | 1.4 |             |             | 1.4 |                  |
| $I_{IB}$ Input bias current                                                     |                                                                              | 25°C                       |             | 20          | 175 |             | 20          | 175 | nA               |
|                                                                                 |                                                                              | Full range                 |             |             | 5   |             |             | 5   |                  |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50 \Omega$                                                            | 25°C                       | 15 to -11   | 15 to -11.9 |     | 15 to -11   | 15 to -11.9 |     | V                |
|                                                                                 |                                                                              | Full range                 | 15 to -10.9 |             |     | 15 to -10.9 |             |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -200 \mu A$                                                           | 25°C                       | 13.8        | 14.1        |     | 13.8        | 14.1        |     | V                |
|                                                                                 |                                                                              | Full range                 | 13.7        |             |     | 13.7        |             |     |                  |
|                                                                                 | $I_O = -2 \text{ mA}$                                                        | 25°C                       | 13.5        | 13.9        |     | 13.5        | 13.9        |     |                  |
|                                                                                 |                                                                              | Full range                 | 13.4        |             |     | 13.4        |             |     |                  |
|                                                                                 | $I_O = -20 \text{ mA}$                                                       | 25°C                       | 11.5        | 12.3        |     | 11.5        | 12.3        |     |                  |
|                                                                                 |                                                                              | Full range                 | 11.5        |             |     | 11.5        |             |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 200 \mu A$                                                            | 25°C                       | -13.8       | -14.2       |     | -13.8       | -14.2       |     | V                |
|                                                                                 |                                                                              | Full range                 | -13.7       |             |     | -13.7       |             |     |                  |
|                                                                                 | $I_O = 2 \text{ mA}$                                                         | 25°C                       | -13.5       | -14         |     | -13.5       | -14         |     |                  |
|                                                                                 |                                                                              | Full range                 | -13.4       |             |     | -13.4       |             |     |                  |
|                                                                                 | $I_O = 20 \text{ mA}$                                                        | 25°C                       | -11.5       | -12.4       |     | -11.5       | -12.4       |     |                  |
|                                                                                 |                                                                              | Full range                 | -11.5       |             |     | -11.5       |             |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10 \text{ V}$                                                     | $R_L = 600 \Omega$         | 25°C        | 80          | 96  | 80          | 96          |     | dB               |
|                                                                                 |                                                                              |                            | Full range  | 79          |     | 79          |             |     |                  |
|                                                                                 |                                                                              | $R_L = 2 \text{ k}\Omega$  | 25°C        | 90          | 109 | 90          | 109         |     |                  |
|                                                                                 |                                                                              |                            | Full range  | 89          |     | 89          |             |     |                  |
|                                                                                 |                                                                              | $R_L = 10 \text{ k}\Omega$ | 25°C        | 95          | 118 | 95          | 118         |     |                  |
|                                                                                 |                                                                              |                            | Full range  | 94          |     | 94          |             |     |                  |
| $r_i$ Input resistance                                                          | $V_{IC} = 0$                                                                 | 25°C                       |             | $10^{12}$   |     | $10^{12}$   |             |     | $\Omega$         |
| $c_i$ Input capacitance                                                         | $V_{IC} = 0, \text{See Figure 5}$                                            | Common mode                | 25°C        | 7.5         |     | 7.5         |             |     | pF               |
|                                                                                 |                                                                              | Differential               | 25°C        | 2.5         |     | 2.5         |             |     |                  |
| $z_o$ Open-loop output impedance                                                | $f = 1 \text{ MHz}$                                                          | 25°C                       |             | 80          |     | 80          |             |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, V_O = 0, R_S = 50 \Omega$                              | 25°C                       | 80          | 98          |     | 80          | 98          |     | dB               |
|                                                                                 |                                                                              | Full range                 | 79          |             |     | 79          |             |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}, V_O = 0, R_S = 50 \Omega$ | 25°C                       | 82          | 99          |     | 82          | 99          |     | dB               |
|                                                                                 |                                                                              | Full range                 | 80          |             |     | 81          |             |     |                  |

$^\dagger$  Full range is 0°C to 70°C.

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2081C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted) (continued)**

| PARAMETER                             | TEST CONDITIONS     | $T_A^\dagger$   | TLE2081C |     |     | TLE2081AC |     |     | UNIT |
|---------------------------------------|---------------------|-----------------|----------|-----|-----|-----------|-----|-----|------|
|                                       |                     |                 | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| $I_{CC}$ Supply current               | $V_O = 0$ , No load | 25°C            | 1.35     | 1.7 | 2.2 | 1.35      | 1.7 | 2.2 | mA   |
|                                       |                     | Full range      |          |     | 2.2 |           |     | 2.2 |      |
| $I_{OS}$ Short-circuit output current | $V_O = 0$           | $V_{ID} = 1$ V  | -30      | -45 |     | -30       | -45 |     | mA   |
|                                       |                     | $V_{ID} = -1$ V | 30       | 48  |     | 30        | 48  |     |      |

$^\dagger$  Full range is 0°C to 70°C.

**TLE2081C operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                        |                                                                                                                | T <sub>A</sub> <sup>†</sup> | TLE2081C |     |     | TLE2081AC |     |     | UNIT   |
|--------------------|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-----------------------------|----------|-----|-----|-----------|-----|-----|--------|
|                    |                                             |                                                                                                                        |                                                                                                                |                             | MIN      | TYP | MAX | MIN       | TYP | MAX |        |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = 10 V, A <sub>VD</sub> = −1,<br>R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 100 pF,<br>See Figure 1 |                                                                                                                | 25°C                        | 30       | 40  |     | 30        | 40  |     | V/μs   |
|                    |                                             |                                                                                                                        |                                                                                                                | Full range                  | 27       |     |     | 27        |     |     |        |
| SR −               | Negative slew rate                          |                                                                                                                        |                                                                                                                | 25°C                        | 30       | 45  |     | 30        | 45  |     | V/μs   |
|                    |                                             |                                                                                                                        |                                                                                                                | Full range                  | 27       |     |     | 27        |     |     |        |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1,<br>10-V step,<br>R <sub>L</sub> = 1 kΩ,<br>C <sub>L</sub> = 100 pF                               | To 10 mV                                                                                                       | 25°C                        | 0.4      |     |     | 0.4       |     |     | μs     |
|                    |                                             |                                                                                                                        | To 1 mV                                                                                                        |                             | 1.5      |     |     | 1.5       |     |     |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω,<br>See Figure 3                                                                                 | f = 10 Hz                                                                                                      | 25°C                        | 28       |     |     | 28        |     |     | nV/√Hz |
|                    |                                             |                                                                                                                        | f = 10 kHz                                                                                                     |                             | 11.6     |     |     | 11.6      |     |     |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                                        | f = 10 Hz to 10 kHz                                                                                            | 25°C                        | 6        |     |     | 6         |     |     | μV     |
|                    |                                             |                                                                                                                        | f = 0.1 Hz to 10 Hz                                                                                            |                             | 0.6      |     |     | 0.6       |     |     |        |
| I <sub>n</sub>     | Equivalent input noise current              |                                                                                                                        | V <sub>IC</sub> = 0, f = 10 kHz                                                                                | 25°C                        | 2.8      |     |     | 2.8       |     |     | fA/√Hz |
| THD + N            | Total harmonic distortion plus noise        |                                                                                                                        | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = 10,<br>f = 1 kHz, R <sub>L</sub> = 2 kΩ,<br>R <sub>S</sub> = 25 Ω | 25°C                        | 0.008%   |     |     | 0.008%    |     |     |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV, R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 25 pF, See Figure 2                                 | 25°C                                                                                                           | 8                           | 10       |     | 8   | 10        |     | MHz |        |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = −1,<br>R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 25 pF                      | 25°C                                                                                                           | 478                         | 637      |     | 478 | 637       |     | kHz |        |
| φ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV, R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 25 pF, See Figure 2                                 | 25°C                                                                                                           | 57°                         |          |     | 57° |           |     |     |        |

$^\dagger$  Full range is 0°C to 70°C.



**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2081M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V (unless otherwise noted)**

| PARAMETER                                                                     | TEST CONDITIONS                                                           | $T_A^\dagger$             | TLE2081M   |           |      | TLE2081AM |           |     | UNIT             |
|-------------------------------------------------------------------------------|---------------------------------------------------------------------------|---------------------------|------------|-----------|------|-----------|-----------|-----|------------------|
|                                                                               |                                                                           |                           | MIN        | TYP       | MAX  | MIN       | TYP       | MAX |                  |
| $V_{IO}$ Input offset voltage                                                 | $V_{IC} = 0, V_O = 0, R_S = 50\Omega$                                     | 25°C                      |            | 0.34      | 6    |           | 0.3       | 3   | mV               |
|                                                                               |                                                                           | Full range                |            |           | 11.2 |           |           | 8.2 |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                |                                                                           | Full range                |            | 3.2       | 29*  |           | 3.2       | 29* | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                 | $V_{IC} = 0, V_O = 0,$<br>See Figure 4                                    | 25°C                      |            | 5         | 100  |           | 5         | 100 | pA               |
|                                                                               |                                                                           | Full range                |            |           | 20   |           |           | 20  | nA               |
| $I_{IB}$ Input bias current                                                   |                                                                           | 25°C                      |            | 15        | 175  |           | 15        | 175 | pA               |
|                                                                               |                                                                           | Full range                |            |           | 65   |           |           | 65  | nA               |
| $V_{ICR}$ Common-mode input voltage range                                     | $R_S = 50\Omega$                                                          | 25°C                      | 5 to -1    | 5 to -1.9 |      | 5 to -1   | 5 to -1.9 |     | V                |
|                                                                               |                                                                           | Full range                | 5 to -0.8  |           |      | 5 to -0.8 |           |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                          | $I_O = -200\mu A$                                                         | 25°C                      | 3.8        | 4.1       |      | 3.8       | 4.1       |     | V                |
|                                                                               |                                                                           | Full range                | 3.6        |           |      | 3.6       |           |     |                  |
|                                                                               | $I_O = -2\text{ mA}$                                                      | 25°C                      | 3.5        | 3.9       |      | 3.5       | 3.9       |     |                  |
|                                                                               |                                                                           | Full range                | 3.3        |           |      | 3.3       |           |     |                  |
|                                                                               | $I_O = -20\text{ mA}$                                                     | 25°C                      | 1.5        | 2.3       |      | 1.5       | 2.3       |     |                  |
|                                                                               |                                                                           | Full range                | 1.4        |           |      | 1.4       |           |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                          | $I_O = 200\mu A$                                                          | 25°C                      | -3.8       | -4.2      |      | -3.8      | -4.2      |     | V                |
|                                                                               |                                                                           | Full range                | -3.6       |           |      | -3.6      |           |     |                  |
|                                                                               | $I_O = 2\text{ mA}$                                                       | 25°C                      | -3.5       | -4.1      |      | -3.5      | -4.1      |     |                  |
|                                                                               |                                                                           | Full range                | -3.3       |           |      | -3.3      |           |     |                  |
|                                                                               | $I_O = 20\text{ mA}$                                                      | 25°C                      | -1.5       | -2.4      |      | -1.5      | -2.4      |     |                  |
|                                                                               |                                                                           | Full range                | -1.4       |           |      | -1.4      |           |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                      | $V_O = \pm 2.3\text{ V}$                                                  | $R_L = 600\Omega$         | 25°C       | 80        | 91   | 80        | 91        |     | dB               |
|                                                                               |                                                                           |                           | Full range | 78        |      | 78        |           |     |                  |
|                                                                               |                                                                           | $R_L = 2\text{ k}\Omega$  | 25°C       | 90        | 100  | 90        | 100       |     |                  |
|                                                                               |                                                                           |                           | Full range | 88        |      | 88        |           |     |                  |
|                                                                               |                                                                           | $R_L = 10\text{ k}\Omega$ | 25°C       | 95        | 106  | 95        | 106       |     |                  |
|                                                                               |                                                                           |                           | Full range | 93        |      | 93        |           |     |                  |
| $r_i$ Input resistance                                                        | $V_{IC} = 0$                                                              | 25°C                      |            | $10^{12}$ |      | $10^{12}$ |           |     | $\Omega$         |
| $c_i$ Input capacitance                                                       | $V_{IC} = 0,$<br>See Figure 5                                             | Common mode               | 25°C       |           | 11   |           | 11        |     | pF               |
|                                                                               |                                                                           | Differential              | 25°C       |           | 2.5  |           | 2.5       |     |                  |
| $z_o$ Open-loop output impedance                                              | $f = 1\text{ MHz}$                                                        | 25°C                      |            | 80        |      | 80        |           |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                              | $V_{IC} = V_{ICRmin}, V_O = 0, R_S = 50\Omega$                            | 25°C                      | 70         | 89        |      | 70        | 89        |     | dB               |
|                                                                               |                                                                           | Full range                | 68         |           |      | 68        |           |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\text{ V to } \pm 15\text{ V}, V_O = 0, R_S = 50\Omega$ | 25°C                      | 82         | 99        |      | 82        | 99        |     | dB               |
|                                                                               |                                                                           | Full range                | 80         |           |      | 80        |           |     |                  |

\*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is  $-55^\circ C$  to  $125^\circ C$ .



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2081M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V (unless otherwise noted) (continued)**

| PARAMETER                             | TEST CONDITIONS     | $T_A^\dagger$   | TLE2081M |     |     | TLE2081AM |     |     | UNIT |
|---------------------------------------|---------------------|-----------------|----------|-----|-----|-----------|-----|-----|------|
|                                       |                     |                 | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| $I_{CC}$ Supply current               | $V_O = 0$ , No load | 25°C            | 1.35     | 1.6 | 2.2 | 1.35      | 1.6 | 2.2 | mA   |
|                                       |                     | Full range      |          |     | 2.2 |           |     | 2.2 |      |
| $I_{OS}$ Short-circuit output current | $V_O = 0$           | $V_{ID} = 1$ V  |          | –35 |     |           | –35 |     | mA   |
|                                       |                     | $V_{ID} = -1$ V |          | 45  |     |           | 45  |     |      |

$^\dagger$  Full range is –55°C to 125°C.

**TLE2081M operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                       |                                              | T <sub>A</sub> <sup>†</sup> | TLE2081M   |     |     | TLE2081AM |     |     | UNIT   |      |
|--------------------|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------|-----------------------------|------------|-----|-----|-----------|-----|-----|--------|------|
|                    |                                             |                                                                                                                       |                                              |                             | MIN        | TYP | MAX | MIN       | TYP | MAX |        |      |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = ±2.3 V,<br>A <sub>VD</sub> = −1, R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 100 pF, See Figure 1 |                                              | 25°C                        | 35         |     |     | 35        |     |     | V/μs   |      |
|                    | Full range                                  |                                                                                                                       |                                              | 20*                         |            |     | 20* |           |     |     |        |      |
| SR −               | Negative slew rate                          |                                                                                                                       |                                              |                             | 25°C       | 38  |     |           | 38  |     |        | V/μs |
|                    |                                             |                                                                                                                       |                                              |                             | Full range | 20* |     |           | 20* |     |        |      |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1, 2-V step,<br>R <sub>L</sub> = 1 kΩ,<br>C <sub>L</sub> = 100 pF                                  | To 10 mV                                     | 25°C                        | 0.25       |     |     | 0.25      |     |     | μs     |      |
|                    |                                             |                                                                                                                       | To 1 mV                                      |                             | 0.4        |     |     | 0.4       |     |     |        |      |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω,<br>See Figure 3                                                                                | f = 10 Hz                                    | 25°C                        | 28         |     |     | 28        |     |     | nV/√Hz |      |
|                    |                                             |                                                                                                                       | f = 10 kHz                                   |                             | 11.6       |     |     | 11.6      |     |     |        |      |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                                       | f = 10 Hz to 10 kHz                          | 25°C                        | 6          |     |     | 6         |     |     | μV     |      |
|                    |                                             |                                                                                                                       | f = 0.1 Hz to 10 Hz                          |                             | 0.6        |     |     | 0.6       |     |     |        |      |
| I <sub>n</sub>     | Equivalent input noise current              | V <sub>IC</sub> = 0,                                                                                                  | f = 10 kHz                                   | 25°C                        | 2.8        |     |     | 2.8       |     |     | fA/√Hz |      |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 5 V, f = 1 kHz, R <sub>S</sub> = 25 Ω                                                            | A <sub>VD</sub> = 10, R <sub>L</sub> = 2 kΩ, | 25°C                        | 0.013%     |     |     | 0.013%    |     |     |        |      |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF,                                                                       | R <sub>L</sub> = 2 kΩ, See Figure 2          | 25°C                        | 9.4        |     |     | 9.4       |     |     | MHz    |      |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 4 V, R <sub>L</sub> = 2 kΩ ,                                                                     | A <sub>VD</sub> = −1, C <sub>L</sub> = 25 pF | 25°C                        | 2.8        |     |     | 2.8       |     |     | MHz    |      |
| φ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF,                                                                       | R <sub>L</sub> = 2 kΩ, See Figure 2          | 25°C                        | 56°        |     |     | 56°       |     |     |        |      |

\*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

$^\dagger$  Full range is –55°C to 125°C.



**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2081M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER        |                                                                       | TEST CONDITIONS                                                                   |                        | T <sub>A</sub> <sup>†</sup> | TLE2081M              |         |     | TLE2081AM             |         |     | UNIT |
|------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------|-----------------------------|-----------------------|---------|-----|-----------------------|---------|-----|------|
|                  |                                                                       |                                                                                   |                        |                             | MIN                   | TYP     | MAX | MIN                   | TYP     | MAX |      |
| V <sub>IO</sub>  | Input offset voltage                                                  | V <sub>IC</sub> = 0, V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω                    |                        | 25°C                        | 0.49 6                |         |     | 0.47 3                |         |     | mV   |
|                  |                                                                       |                                                                                   |                        | Full range                  | 11.2                  |         |     | 8.2                   |         |     |      |
| αV <sub>IO</sub> | Temperature coefficient of input offset voltage                       |                                                                                   |                        |                             | Full range            | 3.2 29* |     |                       | 3.2 29* |     |      |
| I <sub>IO</sub>  | Input offset current                                                  | V <sub>IC</sub> = 0, V <sub>O</sub> = 0, See Figure 4                             |                        | 25°C                        | 6 100                 |         |     | 6 100                 |         |     | pA   |
|                  |                                                                       |                                                                                   |                        | Full range                  | 20                    |         |     | 20                    |         |     | nA   |
| I <sub>IB</sub>  | Input bias current                                                    |                                                                                   |                        | 25°C                        | 20 175                |         |     | 20 175                |         |     | pA   |
|                  |                                                                       |                                                                                   |                        | Full range                  | 65                    |         |     | 65                    |         |     | nA   |
| V <sub>ICR</sub> | Common-mode input voltage range                                       | R <sub>S</sub> = 50 Ω                                                             |                        | 25°C                        | 15 to −11 15 to −11.9 |         |     | 15 to −11 15 to −11.9 |         |     | V    |
|                  |                                                                       |                                                                                   |                        | Full range                  | 15 to −10.8           |         |     | 15 to −10.8           |         |     |      |
| V <sub>OM+</sub> | Maximum positive peak output voltage swing                            | I <sub>O</sub> = −200 μA                                                          |                        | 25°C                        | 13.8 14.1             |         |     | 13.8 14.1             |         |     | V    |
|                  |                                                                       |                                                                                   |                        | Full range                  | 13.6                  |         |     | 13.6                  |         |     |      |
|                  |                                                                       | I <sub>O</sub> = −2 mA                                                            |                        | 25°C                        | 13.5 13.9             |         |     | 13.5 13.9             |         |     |      |
|                  |                                                                       |                                                                                   |                        | Full range                  | 13.3                  |         |     | 13.3                  |         |     |      |
|                  |                                                                       | I <sub>O</sub> = −20 mA                                                           |                        | 25°C                        | 11.5 12.3             |         |     | 11.5 12.3             |         |     |      |
|                  |                                                                       |                                                                                   |                        | Full range                  | 11.4                  |         |     | 11.4                  |         |     |      |
| V <sub>OM−</sub> | Maximum negative peak output voltage swing                            | I <sub>O</sub> = 200 μA                                                           |                        | 25°C                        | −13.8 −14.2           |         |     | −13.8 −14.2           |         |     | V    |
|                  |                                                                       |                                                                                   |                        | Full range                  | −13.6                 |         |     | −13.6                 |         |     |      |
|                  |                                                                       | I <sub>O</sub> = 2 mA                                                             |                        | 25°C                        | −13.5 −14             |         |     | −13.5 −14             |         |     |      |
|                  |                                                                       |                                                                                   |                        | Full range                  | −13.3                 |         |     | −13.3                 |         |     |      |
|                  |                                                                       | I <sub>O</sub> = 20 mA                                                            |                        | 25°C                        | −11.5 −12.4           |         |     | −11.5 −12.4           |         |     |      |
|                  |                                                                       |                                                                                   |                        | Full range                  | −11.4                 |         |     | −11.4                 |         |     |      |
| A <sub>VD</sub>  | Large-signal differential voltage amplification                       | V <sub>O</sub> = ± 10 V                                                           | R <sub>L</sub> = 600 Ω | 25°C                        | 80 96                 |         |     | 80 96                 |         |     | dB   |
|                  |                                                                       |                                                                                   |                        | Full range                  | 78                    |         |     | 78                    |         |     |      |
|                  |                                                                       |                                                                                   | R <sub>L</sub> = 2 kΩ  | 25°C                        | 90 109                |         |     | 90 109                |         |     |      |
|                  |                                                                       |                                                                                   |                        | Full range                  | 88                    |         |     | 88                    |         |     |      |
|                  |                                                                       |                                                                                   | R <sub>L</sub> = 10 kΩ | 25°C                        | 95 118                |         |     | 95 118                |         |     |      |
|                  |                                                                       |                                                                                   |                        | Full range                  | 93                    |         |     | 93                    |         |     |      |
| r <sub>i</sub>   | Input resistance                                                      | V <sub>IC</sub> = 0                                                               |                        | 25°C                        | 10 <sup>12</sup>      |         |     | 10 <sup>12</sup>      |         |     | Ω    |
| c <sub>i</sub>   | Input capacitance                                                     | V <sub>IC</sub> = 0, See Figure 5                                                 | Common mode            | 25°C                        | 7.5                   |         |     | 7.5                   |         |     | pF   |
|                  |                                                                       |                                                                                   | Differential           | 25°C                        | 2.5                   |         |     | 2.5                   |         |     |      |
| z <sub>o</sub>   | Open-loop output impedance                                            | f = 1 MHz                                                                         |                        | 25°C                        | 80                    |         |     | 80                    |         |     | Ω    |
| CMRR             | Common-mode rejection ratio                                           | V <sub>IC</sub> = V <sub>ICRmin</sub> , V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω |                        | 25°C                        | 80 98                 |         |     | 80 98                 |         |     | dB   |
|                  |                                                                       |                                                                                   |                        | Full range                  | 78                    |         |     | 78                    |         |     |      |
| k <sub>SVR</sub> | Supply-voltage rejection ratio (ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> ) | V <sub>CC±</sub> = ±5 V to ±15 V, V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω       |                        | 25°C                        | 82 99                 |         |     | 82 99                 |         |     | dB   |
|                  |                                                                       |                                                                                   |                        | Full range                  | 80                    |         |     | 80                    |         |     |      |

\*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

$^\dagger$  Full range is  $-55^\circ C$  to  $125^\circ C$ .



# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2081M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)(continued)**

| PARAMETER                             | TEST CONDITIONS     | $T_A^\dagger$   | TLE2081M |     |     | TLE2081AM |     |     | UNIT |
|---------------------------------------|---------------------|-----------------|----------|-----|-----|-----------|-----|-----|------|
|                                       |                     |                 | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| $I_{CC}$ Supply current               | $V_O = 0$ , No load | 25°C            | 1.35     | 1.7 | 2.2 | 1.35      | 1.7 | 2.2 | mA   |
|                                       |                     | Full range      |          |     | 2.2 |           |     | 2.2 |      |
| $I_{OS}$ Short-circuit output current | $V_O = 0$           | $V_{ID} = 1$ V  | –30      | –45 |     | –30       | –45 |     | mA   |
|                                       |                     | $V_{ID} = -1$ V | 30       | 48  |     | 30        | 48  |     |      |

$^\dagger$  Full range is –55°C to 125°C.

**TLE2081M operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                           |                                        | T <sub>A</sub> <sup>†</sup> | TLE2081M |     |     | TLE2081AM |     |     | UNIT   |
|--------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|----------------------------------------|-----------------------------|----------|-----|-----|-----------|-----|-----|--------|
|                    |                                             |                                                                                                                           |                                        |                             | MIN      | TYP | MAX | MIN       | TYP | MAX |        |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = 10 V,<br>A <sub>VD</sub> = −1,<br>C <sub>L</sub> = 100 pF,<br>R <sub>L</sub> = 2 kΩ,<br>See Figure 1 |                                        | 25°C                        | 30       | 40  |     | 30        | 40  |     | V/μs   |
|                    | Full range                                  |                                                                                                                           |                                        | 22                          |          |     | 22  |           |     |     |        |
| SR −               | Negative slew rate                          |                                                                                                                           |                                        | 25°C                        | 30       | 45  |     | 30        | 45  |     | V/μs   |
|                    |                                             |                                                                                                                           |                                        | Full range                  | 22       |     |     | 22        |     |     |        |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1,<br>10-V step,<br>R <sub>L</sub> = 1 kΩ,<br>C <sub>L</sub> = 100 pF                                  | To 10 mV                               | 25°C                        | 0.4      |     |     | 0.4       |     |     | μs     |
|                    |                                             |                                                                                                                           | To 1 mV                                |                             | 1.5      |     |     | 1.5       |     |     |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω,<br>See Figure 3                                                                                    | f = 10 Hz                              | 25°C                        | 28       |     |     | 28        |     |     | nV/√Hz |
|                    |                                             |                                                                                                                           | f = 10 kHz                             |                             | 11.6     |     |     | 11.6      |     |     |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                                           | f = 10 Hz to 10 kHz                    | 25°C                        | 6        |     |     | 6         |     |     | μV     |
|                    |                                             |                                                                                                                           | f = 0.1 Hz to 10 Hz                    |                             | 0.6      |     |     | 0.6       |     |     |        |
| I <sub>n</sub>     | Equivalent input noise current              | V <sub>IC</sub> = 0,                                                                                                      | f = 10 kHz                             | 25°C                        | 2.8      |     |     | 2.8       |     |     | fA/√Hz |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = 10,<br>f = 1 kHz,<br>R <sub>S</sub> = 25 Ω                                   |                                        | 25°C                        | 0.008%   |     |     | 0.008%    |     |     |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,                                                                        | R <sub>L</sub> = 2 kΩ,<br>See Figure 2 | 25°C                        | 8*       | 10  |     | 8*        | 10  |     | MHz    |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = −1,<br>R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 25 pF                      |                                        | 25°C                        | 478*     | 637 |     | 478*      | 637 |     | kHz    |
| ϕ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,                                                                        | R <sub>L</sub> = 2 kΩ,<br>See Figure 2 | 25°C                        | 57°      |     |     | 57°       |     |     |        |

\*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

$^\dagger$  Full range is –55°C to 125°C.



**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2081Y electrical characteristics at  $V_{CC\pm} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

| PARAMETER |                                                                       | TEST CONDITIONS                                                                      |                            | TLE2081Y        |                  |     | UNIT     |
|-----------|-----------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------|-----------------|------------------|-----|----------|
|           |                                                                       |                                                                                      |                            | MIN             | TYP              | MAX |          |
| $V_{IO}$  | Input offset voltage                                                  | $V_{IC} = 0$ , $V_O = 0$ , $R_S = 50\ \Omega$                                        |                            | 0.49            | 6                |     | mV       |
| $I_{IO}$  | Input offset current                                                  | $V_{IC} = 0$ , $V_O = 0$ , See Figure 4                                              |                            | 6               | 100              |     | pA       |
| $I_{IB}$  | Input bias current                                                    |                                                                                      |                            | 20              | 175              |     |          |
| $V_{ICR}$ | Common-mode input voltage range                                       | $R_S = 50\ \Omega$                                                                   |                            | 15<br>to<br>-11 | 15<br>to<br>11.9 |     | V        |
| $V_{OM+}$ | Maximum positive peak output voltage swing                            | $I_O = -200\ \mu\text{A}$                                                            |                            | 13.8            | 14.1             |     | V        |
|           |                                                                       | $I_O = -2\ \text{mA}$                                                                |                            | 13.5            | 13.9             |     |          |
|           |                                                                       | $I_O = -20\ \text{mA}$                                                               |                            | 11.5            | 12.3             |     |          |
| $V_{OM-}$ | Maximum negative peak output voltage swing                            | $I_O = 200\ \mu\text{A}$                                                             |                            | -13.8           | -14.2            |     | V        |
|           |                                                                       | $I_O = 2\ \text{mA}$                                                                 |                            | -13.5           | -14              |     |          |
|           |                                                                       | $I_O = 20\ \text{mA}$                                                                |                            | -11.5           | -12.4            |     |          |
| $A_{VD}$  | Large-signal differential voltage amplification                       | $V_O = \pm 10\ \text{V}$                                                             | $R_L = 600\ \Omega$        | 80              | 96               |     | dB       |
|           |                                                                       |                                                                                      | $R_L = 2\ \text{k}\Omega$  | 90              | 109              |     |          |
|           |                                                                       |                                                                                      | $R_L = 10\ \text{k}\Omega$ | 95              | 118              |     |          |
| $r_i$     | Input resistance                                                      | $V_{IC} = 0$                                                                         |                            | 10              | 12               |     | $\Omega$ |
| $c_i$     | Input capacitance                                                     | $V_{IC} = 0$ , See Figure 5                                                          | Common mode                | 7.5             |                  |     | pF       |
|           |                                                                       |                                                                                      | Differential               | 2.5             |                  |     |          |
| $z_o$     | Open-loop output impedance                                            | $f = 1\ \text{MHz}$                                                                  |                            | 80              |                  |     | $\Omega$ |
| CMRR      | Common-mode rejection ratio                                           | $V_{IC} = V_{ICR\min}$ , $V_O = 0$ , $R_S = 50\ \Omega$                              |                            | 80              | 98               |     | dB       |
| $k_{SVR}$ | Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V}$ to $\pm 15\ \text{V}$ , $V_O = 0$ , $R_S = 50\ \Omega$ |                            | 82              | 99               |     | dB       |
| $I_{CC}$  | Supply current                                                        | $V_O = 0$ , No load                                                                  |                            | 1.35            | 1.7              | 2.2 | mA       |
| $I_{OS}$  | Short-circuit output current                                          | $V_O = 0$                                                                            | $V_{ID} = 1\ \text{V}$     | -30             | -45              |     | mA       |
|           |                                                                       |                                                                                      | $V_{ID} = -1\ \text{V}$    | 30              | 48               |     |          |

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2082C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                              | $T_A^\dagger$              | TLE2082C   |           |     | TLE2082AC |           |     | UNIT             |
|---------------------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------|------------|-----------|-----|-----------|-----------|-----|------------------|
|                                                                                 |                                                                              |                            | MIN        | TYP       | MAX | MIN       | TYP       | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, V_O = 0, R_S = 50 \Omega$                                       | 25°C                       | 0.9        | 6         |     | 0.65      | 4         |     | mV               |
|                                                                                 |                                                                              | Full range                 |            | 8.1       |     |           | 5.1       |     |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                                              | Full range                 | 2.3        | 25        |     | 2.3       | 25        |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   | $V_{IC} = 0, V_O = 0, \text{See Figure 4}$                                   | 25°C                       | 5          | 100       |     | 5         | 100       |     | pA               |
|                                                                                 |                                                                              | Full range                 |            | 1.4       |     |           | 1.4       |     | nA               |
| $I_{IB}$ Input bias current                                                     |                                                                              | 25°C                       | 15         | 175       |     | 15        | 175       |     | pA               |
|                                                                                 |                                                                              | Full range                 |            | 5         |     |           | 5         |     | nA               |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50 \Omega$                                                            | 25°C                       | 5 to -1    | 5 to -1.9 |     | 5 to -1   | 5 to -1.9 |     | V                |
|                                                                                 |                                                                              | Full range                 | 5 to -0.9  |           |     | 5 to -0.9 |           |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -200 \mu A$                                                           | 25°C                       | 3.8        | 4.1       |     | 3.8       | 4.1       |     | V                |
|                                                                                 |                                                                              | Full range                 | 3.7        |           |     | 3.7       |           |     |                  |
|                                                                                 | $I_O = -2 \text{ mA}$                                                        | 25°C                       | 3.5        | 3.9       |     | 3.5       | 3.9       |     |                  |
|                                                                                 |                                                                              | Full range                 | 3.4        |           |     | 3.4       |           |     |                  |
|                                                                                 | $I_O = -20 \text{ mA}$                                                       | 25°C                       | 1.5        | 2.3       |     | 1.5       | 2.3       |     |                  |
|                                                                                 |                                                                              | Full range                 | 1.5        |           |     | 1.5       |           |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 200 \mu A$                                                            | 25°C                       | -3.8       | -4.2      |     | -3.8      | -4.2      |     | V                |
|                                                                                 |                                                                              | Full range                 | -3.7       |           |     | -3.7      |           |     |                  |
|                                                                                 | $I_O = 2 \text{ mA}$                                                         | 25°C                       | -3.5       | -4.1      |     | -3.5      | -4.1      |     |                  |
|                                                                                 |                                                                              | Full range                 | -3.4       |           |     | -3.4      |           |     |                  |
|                                                                                 | $I_O = 20 \text{ mA}$                                                        | 25°C                       | -1.5       | -2.4      |     | -1.5      | -2.4      |     |                  |
|                                                                                 |                                                                              | Full range                 | -1.5       |           |     | -1.5      |           |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 2.3 \text{ V}$                                                    | $R_L = 600 \Omega$         | 25°C       | 80        | 91  | 80        | 91        |     | dB               |
|                                                                                 |                                                                              |                            | Full range | 79        |     | 79        |           |     |                  |
|                                                                                 |                                                                              | $R_L = 2 \text{ k}\Omega$  | 25°C       | 90        | 100 | 90        | 100       |     |                  |
|                                                                                 |                                                                              |                            | Full range | 89        |     | 89        |           |     |                  |
|                                                                                 |                                                                              | $R_L = 10 \text{ k}\Omega$ | 25°C       | 95        | 106 | 95        | 106       |     |                  |
|                                                                                 |                                                                              |                            | Full range | 94        |     | 94        |           |     |                  |
| $r_i$ Input resistance                                                          | $V_{IC} = 0$                                                                 | 25°C                       |            | $10^{12}$ |     |           | $10^{12}$ |     | $\Omega$         |
| $c_i$ Input capacitance                                                         | Common mode                                                                  | 25°C                       |            | 11        |     |           | 11        |     | pF               |
|                                                                                 | Differential                                                                 | 25°C                       |            | 2.5       |     |           | 2.5       |     |                  |
| $z_o$ Open-loop output impedance                                                | $f = 1 \text{ MHz}$                                                          | 25°C                       |            | 80        |     |           | 80        |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, V_O = 0, R_S = 50 \Omega$                              | 25°C                       | 70         | 89        |     | 70        | 89        |     | dB               |
|                                                                                 |                                                                              | Full range                 | 68         |           |     | 68        |           |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}, V_O = 0, R_S = 50 \Omega$ | 25°C                       | 82         | 99        |     | 82        | 99        |     | dB               |
|                                                                                 |                                                                              | Full range                 | 80         |           |     | 80        |           |     |                  |
| $I_{CC}$ Supply current (both channels)                                         | $V_O = 0, \text{No load}$                                                    | 25°C                       | 2.7        | 2.9       | 3.9 | 2.7       | 2.9       | 3.9 | mA               |
|                                                                                 |                                                                              | Full range                 |            |           | 3.9 |           |           | 3.9 |                  |

$^\dagger$  Full range is 0°C to 70°C.



**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2082C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V (unless otherwise noted) (continued)**

| PARAMETER                             | TEST CONDITIONS                         | $T_A$ | TLE2082C |     |     | TLE2082AC |     |     | UNIT |
|---------------------------------------|-----------------------------------------|-------|----------|-----|-----|-----------|-----|-----|------|
|                                       |                                         |       | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| Crosstalk attenuation                 | $V_{IC} = 0$ , $R_L = 2\text{ k}\Omega$ | 25°C  |          | 120 |     |           | 120 |     | dB   |
| $I_{OS}$ Short-circuit output current | $V_O = 0$                               | 25°C  |          | –35 |     |           | –35 |     | mA   |
|                                       |                                         |       |          | 45  |     |           | 45  |     |      |

**TLE2082C operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                       |                                                   | T <sub>A</sub> <sup>†</sup> | TLE2082C   |     |        | TLE2082AC |     |        | UNIT   |      |
|--------------------|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|-----------------------------|------------|-----|--------|-----------|-----|--------|--------|------|
|                    |                                             |                                                                                                                       |                                                   |                             | MIN        | TYP | MAX    | MIN       | TYP | MAX    |        |      |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = ±2.3 V,<br>A <sub>VD</sub> = −1, R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 100 pF, See Figure 1 |                                                   | 25°C                        | 35         |     |        | 35        |     |        | V/μs   |      |
|                    | Full range                                  |                                                                                                                       |                                                   | 22                          |            |     | 22     |           |     |        |        |      |
| SR −               | Negative slew rate                          |                                                                                                                       |                                                   |                             | 25°C       | 38  |        |           | 38  |        |        | V/μs |
|                    |                                             |                                                                                                                       |                                                   |                             | Full range | 22  |        |           | 22  |        |        |      |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1, 2-V step,<br>R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 100 pF                                     | To 10 mV                                          | 25°C                        | 0.25       |     |        | 0.25      |     |        | μs     |      |
|                    |                                             |                                                                                                                       | To 1 mV                                           |                             | 0.4        |     |        | 0.4       |     |        |        |      |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω, See Figure 3                                                                                   | f = 10 Hz                                         | 25°C                        | 28         |     |        | 28        |     |        | nV/√Hz |      |
|                    |                                             |                                                                                                                       | f = 10 kHz                                        |                             | 11.6       |     |        | 11.6      |     |        |        |      |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                                       |                                                   | f = 10 Hz to 10 kHz         | 25°C       | 6   |        |           | 6   |        |        | μV   |
|                    |                                             |                                                                                                                       |                                                   | f = 0.1Hz to 10 Hz          |            | 0.6 |        |           | 0.6 |        |        |      |
| I <sub>n</sub>     | Equivalent input noise current              | V <sub>IC</sub> = 0, f = 10 kHz                                                                                       | 25°C                                              | 2.8                         |            |     | 2.8    |           |     | fA/√Hz |        |      |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 5 V, f = 1 kHz, R <sub>S</sub> = 25 Ω                                                            | A <sub>VD</sub> = 10, R <sub>L</sub> = 2 kΩ, 25°C | 0.013%                      |            |     | 0.013% |           |     |        |        |      |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF, R <sub>L</sub> = 2 kΩ, See Figure 2                                   | 25°C                                              | 9.4                         |            |     | 9.4    |           |     | MHz    |        |      |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 4 V, R <sub>L</sub> = 2 kΩ , A <sub>VD</sub> = −1, C <sub>L</sub> = 25 pF                        | 25°C                                              | 2.8                         |            |     | 2.8    |           |     | MHz    |        |      |
| φ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF, R <sub>L</sub> = 2 kΩ, See Figure 2                                   | 25°C                                              | 56°                         |            |     | 56°    |           |     |        |        |      |

<sup>†</sup> Full range is 0°C to 70°C.

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2082C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER        |                                                                       |              | TEST CONDITIONS                                                                   | T <sub>A</sub> <sup>†</sup> | TLE2082C              |        |     | TLE2082AC             |        |     | UNIT  |    |
|------------------|-----------------------------------------------------------------------|--------------|-----------------------------------------------------------------------------------|-----------------------------|-----------------------|--------|-----|-----------------------|--------|-----|-------|----|
|                  |                                                                       |              |                                                                                   |                             | MIN                   | TYP    | MAX | MIN                   | TYP    | MAX |       |    |
| V <sub>IO</sub>  | Input offset voltage                                                  |              | V <sub>IC</sub> = 0, V <sub>O</sub> = 0,<br>R <sub>S</sub> = 50 Ω                 | 25°C                        | 1.1 7                 |        |     | 0.7 4                 |        |     | mV    |    |
|                  |                                                                       |              |                                                                                   | Full range                  | 8.1                   |        |     | 5.1                   |        |     |       |    |
| αV <sub>IO</sub> | Temperature coefficient of input offset voltage                       |              |                                                                                   | Full range                  | 2.4 25                |        |     | 2.4 25                |        |     | μV/°C |    |
| I <sub>IO</sub>  | Input offset current                                                  |              | V <sub>IC</sub> = 0, V <sub>O</sub> = 0,<br>See Figure 4                          | 25°C                        | 6 100                 |        |     | 6 100                 |        |     | pA    |    |
|                  |                                                                       |              |                                                                                   | Full range                  | 1.4                   |        |     | 1.4                   |        |     | nA    |    |
| I <sub>IB</sub>  | Input bias current                                                    |              |                                                                                   | 25°C                        | 20 175                |        |     | 20 175                |        |     | pA    |    |
|                  |                                                                       |              |                                                                                   | Full range                  | 5                     |        |     | 5                     |        |     | nA    |    |
| V <sub>ICR</sub> | Common-mode input voltage range                                       |              | R <sub>S</sub> = 50 Ω                                                             | 25°C                        | 15 to −11 15 to −11.9 |        |     | 15 to −11 15 to −11.9 |        |     | V     |    |
|                  |                                                                       |              |                                                                                   | Full range                  | 15 to −10.9           |        |     | 15 to −10.9           |        |     |       |    |
| V <sub>OM+</sub> | Maximum positive peak output voltage swing                            |              | I <sub>O</sub> = −200 μA                                                          | 25°C                        | 13.8 14.1             |        |     | 13.8 14.1             |        |     | V     |    |
|                  |                                                                       |              |                                                                                   | Full range                  | 13.6                  |        |     | 13.6                  |        |     |       |    |
|                  |                                                                       |              | I <sub>O</sub> = −2 mA                                                            | 25°C                        | 13.5 13.9             |        |     | 13.5 13.9             |        |     |       |    |
|                  |                                                                       |              |                                                                                   | Full range                  | 13.4                  |        |     | 13.4                  |        |     |       |    |
|                  |                                                                       |              | I <sub>O</sub> = −20 mA                                                           | 25°C                        | 11.5 12.3             |        |     | 11.5 12.3             |        |     |       |    |
|                  |                                                                       |              |                                                                                   | Full range                  | 11.5                  |        |     | 11.5                  |        |     |       |    |
| V <sub>OM−</sub> | Maximum negative peak output voltage swing                            |              | I <sub>O</sub> = 200 μA                                                           | 25°C                        | −13.8 −14.2           |        |     | −13.8 −14.2           |        |     | V     |    |
|                  |                                                                       |              |                                                                                   | Full range                  | −13.7                 |        |     | −13.7                 |        |     |       |    |
|                  |                                                                       |              | I <sub>O</sub> = 2 mA                                                             | 25°C                        | −13.5 −14             |        |     | −13.5 −14             |        |     |       |    |
|                  |                                                                       |              |                                                                                   | Full range                  | −13.4                 |        |     | −13.4                 |        |     |       |    |
|                  |                                                                       |              | I <sub>O</sub> = 20 mA                                                            | 25°C                        | −11.5 −12.4           |        |     | −11.5 −12.4           |        |     |       |    |
|                  |                                                                       |              |                                                                                   | Full range                  | −11.5                 |        |     | −11.5                 |        |     |       |    |
| A <sub>VD</sub>  | Large-signal differential voltage amplification                       |              | V <sub>O</sub> = ± 10 V                                                           | R <sub>L</sub> = 600 Ω      | 25°C                  | 80 96  |     |                       | 80 96  |     |       | dB |
|                  |                                                                       |              |                                                                                   |                             | Full range            | 79     |     |                       | 79     |     |       |    |
|                  |                                                                       |              |                                                                                   | R <sub>L</sub> = 2 kΩ       | 25°C                  | 90 109 |     |                       | 90 109 |     |       |    |
|                  |                                                                       |              |                                                                                   |                             | Full range            | 89     |     |                       | 89     |     |       |    |
|                  |                                                                       |              |                                                                                   | R <sub>L</sub> = 10 kΩ      | 25°C                  | 95 118 |     |                       | 95 118 |     |       |    |
|                  |                                                                       |              |                                                                                   |                             | Full range            | 94     |     |                       | 94     |     |       |    |
| r <sub>i</sub>   | Input resistance                                                      |              | V <sub>IC</sub> = 0                                                               | 25°C                        | 10 <sup>12</sup>      |        |     | 10 <sup>12</sup>      |        |     | Ω     |    |
| c <sub>i</sub>   | Input capacitance                                                     | Common mode  | V <sub>IC</sub> = 0, See Figure 5                                                 | 25°C                        | 7.5                   |        |     | 7.5                   |        |     | pF    |    |
|                  |                                                                       | Differential |                                                                                   | 25°C                        | 2.5                   |        |     | 2.5                   |        |     |       |    |
| z <sub>O</sub>   | Open-loop output impedance                                            |              | f = 1 MHz                                                                         | 25°C                        | 80                    |        |     | 80                    |        |     | Ω     |    |
| CMRR             | Common-mode rejection ratio                                           |              | V <sub>IC</sub> = V <sub>ICRmin</sub> , V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω | 25°C                        | 80 98                 |        |     | 80 98                 |        |     | dB    |    |
|                  |                                                                       |              |                                                                                   | Full range                  | 79                    |        |     | 79                    |        |     |       |    |
| k <sub>SVR</sub> | Supply-voltage rejection ratio (ΔV <sub>CC±</sub> /ΔV <sub>IO</sub> ) |              | V <sub>CC±</sub> = ±5 V to ±15 V, V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω       | 25°C                        | 82 99                 |        |     | 82 99                 |        |     | dB    |    |
|                  |                                                                       |              |                                                                                   | Full range                  | 81                    |        |     | 81                    |        |     |       |    |

$^\dagger$  Full range is 0°C to 70°C.

**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2082C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted) (continued)**

| PARAMETER             |                                   | TEST CONDITIONS       |                        | T <sub>A</sub> | TLE2082C |     |     | TLE2082AC |     |     | UNIT |
|-----------------------|-----------------------------------|-----------------------|------------------------|----------------|----------|-----|-----|-----------|-----|-----|------|
|                       |                                   |                       |                        |                | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| I <sub>CC</sub>       | Supply current<br>(both channels) | V <sub>O</sub> = 0,   | No load                | 25°C           | 2.7      | 3.1 | 3.9 | 2.7       | 3.1 | 3.9 | mA   |
|                       |                                   |                       |                        | Full range     | 3.9      |     |     | 3.9       |     |     |      |
| Crosstalk attenuation |                                   | V <sub>I</sub> C = 0, | R <sub>L</sub> = 2 kΩ  | 25°C           | 120      |     |     | 120       |     |     | dB   |
| I <sub>OS</sub>       | Short-circuit output current      | V <sub>O</sub> = 0    | V <sub>ID</sub> = 1 V  | 25°C           | −30      | −45 |     | −30       | −45 |     | mA   |
|                       |                                   |                       | V <sub>ID</sub> = −1 V |                | 30       | 48  |     | 30        | 48  |     |      |

**TLE2082C operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                     |                                     | T <sub>A</sub> <sup>†</sup> | TLE2082C |     |     | TLE2082AC |     |     | UNIT   |
|--------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------------|----------|-----|-----|-----------|-----|-----|--------|
|                    |                                             |                                                                                                                     |                                     |                             | MIN      | TYP | MAX | MIN       | TYP | MAX |        |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = 10 V, A <sub>VD</sub> = −1,<br>R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF,<br>See Figure 1 |                                     | 25°C                        | 28       | 40  |     | 28        | 40  |     | V/μs   |
|                    |                                             |                                                                                                                     |                                     | Full range                  | 25       |     |     | 25        |     |     |        |
| SR −               | Negative slew rate                          |                                                                                                                     |                                     | 25°C                        | 30       | 45  |     | 30        | 45  |     | V/μs   |
|                    |                                             |                                                                                                                     |                                     | Full range                  | 25       |     |     | 25        |     |     |        |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1, 10-V step,<br>R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 100 pF                                  | To 10 mV                            | 25°C                        | 0.4      |     |     | 0.4       |     |     | μs     |
|                    |                                             |                                                                                                                     | To 1 mV                             |                             | 1.5      |     |     | 1.5       |     |     |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω,<br>See Figure 3                                                                              | f = 10 Hz                           | 25°C                        | 28       |     |     | 28        |     |     | nV/√Hz |
|                    |                                             |                                                                                                                     | f = 10 kHz                          |                             | 11.6     |     |     | 11.6      |     |     |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                                     | f = 10 Hz to 10 kHz                 | 25°C                        | 6        |     |     | 6         |     |     | μV     |
|                    |                                             |                                                                                                                     | f = 0.1 Hz to 10 Hz                 |                             | 0.6      |     |     | 0.6       |     |     |        |
| I <sub>n</sub>     | Equivalent input noise current              | V <sub>IC</sub> = 0, f = 10 kHz                                                                                     |                                     | 25°C                        | 2.8      |     |     | 2.8       |     |     | fA/√Hz |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = 10, f = 1 kHz, R <sub>L</sub> = 2 kΩ, R <sub>S</sub> = 25 Ω            |                                     | 25°C                        | 0.008%   |     |     | 0.008%    |     |     |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF,                                                                     | R <sub>L</sub> = 2 kΩ, See Figure 2 | 25°C                        | 8        | 10  |     | 8         | 10  |     | MHz    |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = −1, R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 25 pF                      |                                     | 25°C                        | 478      | 637 |     | 478       | 637 |     | kHz    |
| φ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF,                                                                     | R <sub>L</sub> = 2 kΩ, See Figure 2 | 25°C                        | 57°      |     |     | 57°       |     |     |        |

$^\dagger$  Full range is 0°C to 70°C.

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2082I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                     | TEST CONDITIONS                                                                | $T_A^\dagger$              | TLE2082I   |           |     | TLE2082AI |           |     | UNIT                         |
|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------------------|------------|-----------|-----|-----------|-----------|-----|------------------------------|
|                                                                               |                                                                                |                            | MIN        | TYP       | MAX | MIN       | TYP       | MAX |                              |
| $V_{IO}$ Input offset voltage                                                 | $V_{IC} = 0, V_O = 0, R_S = 50\ \Omega$                                        | 25°C                       | 0.9        | 7         |     | 0.65      | 4         |     | mV                           |
|                                                                               |                                                                                | Full range                 |            | 8.5       |     |           | 5.5       |     |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                |                                                                                | Full range                 | 2.4        | 25        |     | 2.4       | 25        |     | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                                 | $V_{IC} = 0, V_O = 0,$<br>See Figure 4                                         | 25°C                       | 5          | 100       |     | 5         | 100       |     | pA                           |
|                                                                               |                                                                                | Full range                 |            | 5         |     |           | 5         |     | nA                           |
| $I_{IB}$ Input bias current                                                   |                                                                                | 25°C                       | 15         | 175       |     | 15        | 175       |     | pA                           |
|                                                                               |                                                                                | Full range                 |            | 10        |     |           | 10        |     | nA                           |
| $V_{ICR}$ Common-mode input voltage range                                     | $R_S = 50\ \Omega$                                                             | 25°C                       | 5 to -1    | 5 to -1.9 |     | 5 to -1   | 5 to -1.9 |     | V                            |
|                                                                               |                                                                                | Full range                 | 5 to -0.8  |           |     | 5 to -0.8 |           |     |                              |
| $V_{OM+}$ Maximum positive peak output voltage swing                          | $I_O = -200\ \mu\text{A}$                                                      | 25°C                       | 3.8        | 4.1       |     | 3.8       | 4.1       |     | V                            |
|                                                                               |                                                                                | Full range                 | 3.7        |           |     | 3.7       |           |     |                              |
|                                                                               | $I_O = -2\ \text{mA}$                                                          | 25°C                       | 3.5        | 3.9       |     | 3.5       | 3.9       |     |                              |
|                                                                               |                                                                                | Full range                 | 3.4        |           |     | 3.4       |           |     |                              |
|                                                                               | $I_O = -20\ \text{mA}$                                                         | 25°C                       | 1.5        | 2.3       |     | 1.5       | 2.3       |     |                              |
|                                                                               |                                                                                | Full range                 | 1.5        |           |     | 1.5       |           |     |                              |
| $V_{OM-}$ Maximum negative peak output voltage swing                          | $I_O = 200\ \mu\text{A}$                                                       | 25°C                       | -3.8       | -4.2      |     | -3.8      | -4.2      |     | V                            |
|                                                                               |                                                                                | Full range                 | -3.7       |           |     | -3.7      |           |     |                              |
|                                                                               | $I_O = 2\ \text{mA}$                                                           | 25°C                       | -3.5       | -4.1      |     | -3.5      | -4.1      |     |                              |
|                                                                               |                                                                                | Full range                 | -3.4       |           |     | -3.4      |           |     |                              |
|                                                                               | $I_O = 20\ \text{mA}$                                                          | 25°C                       | -1.5       | -2.4      |     | -1.5      | -2.4      |     |                              |
|                                                                               |                                                                                | Full range                 | -1.5       |           |     | -1.5      |           |     |                              |
| $A_{VD}$ Large-signal differential voltage amplification                      | $V_O = \pm 2.3\ \text{V}$                                                      | $R_L = 600\ \Omega$        | 25°C       | 80        | 91  | 80        | 91        |     | dB                           |
|                                                                               |                                                                                |                            | Full range | 79        |     | 79        |           |     |                              |
|                                                                               |                                                                                | $R_L = 2\ \text{k}\Omega$  | 25°C       | 90        | 100 | 90        | 100       |     |                              |
|                                                                               |                                                                                |                            | Full range | 89        |     | 89        |           |     |                              |
|                                                                               |                                                                                | $R_L = 10\ \text{k}\Omega$ | 25°C       | 95        | 106 | 95        | 106       |     |                              |
|                                                                               |                                                                                |                            | Full range | 94        |     | 94        |           |     |                              |
| $r_i$ Input resistance                                                        | $V_{IC} = 0$                                                                   | 25°C                       |            | $10^{12}$ |     |           | $10^{12}$ |     | $\Omega$                     |
| $c_i$ Input capacitance                                                       | Common mode                                                                    | 25°C                       |            | 11        |     |           | 11        |     | pF                           |
|                                                                               | Differential                                                                   | 25°C                       |            | 2.5       |     |           | 2.5       |     |                              |
| $z_o$ Open-loop output impedance                                              | $f = 1\ \text{MHz}$                                                            | 25°C                       |            | 80        |     |           | 80        |     | $\Omega$                     |
| CMRR Common-mode rejection ratio                                              | $V_{IC} = V_{ICRmin}, V_O = 0, R_S = 50\ \Omega$                               | 25°C                       | 70         | 89        |     | 70        | 89        |     | dB                           |
|                                                                               |                                                                                | Full range                 | 68         |           |     | 68        |           |     |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V}$ to $\pm 15\ \text{V}, V_O = 0, R_S = 50\ \Omega$ | 25°C                       | 82         | 99        |     | 82        | 99        |     | dB                           |
|                                                                               |                                                                                | Full range                 | 80         |           |     | 80        |           |     |                              |
| $I_{CC}$ Supply current (both channels)                                       | $V_O = 0, \text{ No load}$                                                     | 25°C                       | 2.7        | 2.9       | 3.9 | 2.7       | 2.9       | 3.9 | mA                           |
|                                                                               |                                                                                | Full range                 |            |           | 3.9 |           |           | 3.9 |                              |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .



**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2082I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$  (unless otherwise noted) (continued)**

| PARAMETER                             | TEST CONDITIONS                         | $T_A$                  | TLE2082I |     |     | TLE2082AI |     |     | UNIT |
|---------------------------------------|-----------------------------------------|------------------------|----------|-----|-----|-----------|-----|-----|------|
|                                       |                                         |                        | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| Crosstalk attenuation                 | $V_{IC} = 0$ , $R_L = 2\text{ k}\Omega$ | 25°C                   |          | 120 |     |           | 120 |     | dB   |
| $I_{OS}$ Short-circuit output current | $V_O = 0$                               | $V_{ID} = 1\text{ V}$  |          | -35 |     |           | -35 |     | mA   |
|                                       |                                         | $V_{ID} = -1\text{ V}$ |          | 45  |     |           | 45  |     |      |

**TLE2082I operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5\text{ V}$**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                       |                                              | T <sub>A</sub> <sup>†</sup> | TLE2082I |      |     | TLE2082AI |     |        | UNIT   |
|--------------------|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------|-----------------------------|----------|------|-----|-----------|-----|--------|--------|
|                    |                                             |                                                                                                                       |                                              |                             | MIN      | TYP  | MAX | MIN       | TYP | MAX    |        |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = ±2.3 V,<br>A <sub>VD</sub> = −1, R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 100 pF, See Figure 1 |                                              | 25°C                        | 35       |      |     | 35        |     |        | V/μs   |
|                    | Full range                                  |                                                                                                                       |                                              | 20                          |          |      | 20  |           |     |        |        |
| SR −               | Negative slew rate                          |                                                                                                                       |                                              | 25°C                        | 38       |      |     | 38        |     |        | V/μs   |
|                    | Full range                                  |                                                                                                                       |                                              | 20                          |          |      | 20  |           |     |        |        |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1, 2-V step,<br>R <sub>L</sub> = 1 kΩ,<br>C <sub>L</sub> = 100 pF                                  | To 10 mV                                     | 25°C                        | 0.25     |      |     | 0.25      |     |        | μs     |
|                    |                                             |                                                                                                                       | To 1 mV                                      |                             | 0.4      |      |     | 0.4       |     |        |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω,<br>See Figure 3                                                                                | f = 10 Hz                                    | 25°C                        | 28       |      |     | 28        |     |        | nV/√Hz |
|                    | f = 10 kHz                                  |                                                                                                                       | 11.6                                         |                             |          | 11.6 |     |           |     |        |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                                       | f = 10 Hz to 10 kHz                          | 25°C                        | 6        |      |     | 6         |     |        | μV     |
|                    |                                             |                                                                                                                       | f = 0.1 Hz to 10 Hz                          |                             | 0.6      |      |     | 0.6       |     |        |        |
| I <sub>n</sub>     | Equivalent input noise current              | V <sub>IC</sub> = 0, f = 10 kHz                                                                                       | 25°C                                         | 2.8                         |          |      | 2.8 |           |     | fA/√Hz |        |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 5 V, f = 1 kHz, R <sub>S</sub> = 25 Ω                                                            | A <sub>VD</sub> = 10, R <sub>L</sub> = 2 kΩ, | 25°C                        | 0.013%   |      |     | 0.013%    |     |        |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF,                                                                       | R <sub>L</sub> = 2 kΩ, See Figure 2          | 25°C                        | 9.4      |      |     | 9.4       |     |        | MHz    |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 4 V, R <sub>L</sub> = 2 kΩ ,                                                                     | A <sub>VD</sub> = −1, C <sub>L</sub> = 25 pF | 25°C                        | 2.8      |      |     | 2.8       |     |        | MHz    |
| φ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF,                                                                       | R <sub>L</sub> = 2 kΩ, See Figure 2          | 25°C                        | 56°      |      |     | 56°       |     |        |        |

<sup>†</sup> Full range is 40°C to 85°C.

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2082I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                              | $T_A^\dagger$                     | TLE2082I    |             |     | TLE2082AI   |             |     | UNIT             |
|---------------------------------------------------------------------------------|------------------------------------------------------------------------------|-----------------------------------|-------------|-------------|-----|-------------|-------------|-----|------------------|
|                                                                                 |                                                                              |                                   | MIN         | TYP         | MAX | MIN         | TYP         | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, V_O = 0, R_S = 50 \Omega$                                       | 25°C                              | 1.1         | 7           |     | 0.7         | 4           |     | mV               |
|                                                                                 |                                                                              | Full range                        |             | 8.5         |     |             | 5.5         |     |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                                              | Full range                        | 2.4         | 25          |     | 2.4         | 25          |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   | $V_{IC} = 0, V_O = 0, \text{See Figure 4}$                                   | 25°C                              | 6           | 100         |     | 6           | 100         |     | pA               |
|                                                                                 |                                                                              | Full range                        |             | 5           |     |             | 5           |     | nA               |
| $I_{IB}$ Input bias current                                                     |                                                                              | 25°C                              | 20          | 175         |     | 20          | 175         |     | pA               |
|                                                                                 |                                                                              | Full range                        |             | 10          |     |             | 10          |     | nA               |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50 \Omega$                                                            | 25°C                              | 15 to -11   | 15 to -11.9 |     | 15 to -11   | 15 to -11.9 |     | V                |
|                                                                                 |                                                                              | Full range                        | 15 to -10.8 |             |     | 15 to -10.8 |             |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -200 \mu A$                                                           | 25°C                              | 13.8        | 14.1        |     | 13.8        | 14.1        |     | V                |
|                                                                                 |                                                                              | Full range                        | 13.7        |             |     | 13.7        |             |     |                  |
|                                                                                 | $I_O = -2 \text{ mA}$                                                        | 25°C                              | 13.5        | 13.9        |     | 13.5        | 13.9        |     |                  |
|                                                                                 |                                                                              | Full range                        | 13.4        |             |     | 13.4        |             |     |                  |
|                                                                                 | $I_O = -20 \text{ mA}$                                                       | 25°C                              | 11.5        | 12.3        |     | 11.5        | 12.3        |     |                  |
|                                                                                 |                                                                              | Full range                        | 11.5        |             |     | 11.5        |             |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 200 \mu A$                                                            | 25°C                              | -13.8       | -14.2       |     | -13.8       | -14.2       |     | V                |
|                                                                                 |                                                                              | Full range                        | -13.7       |             |     | -13.7       |             |     |                  |
|                                                                                 | $I_O = 2 \text{ mA}$                                                         | 25°C                              | -13.5       | -14         |     | -13.5       | -14         |     |                  |
|                                                                                 |                                                                              | Full range                        | -13.4       |             |     | -13.4       |             |     |                  |
|                                                                                 | $I_O = 20 \text{ mA}$                                                        | 25°C                              | -11.5       | -12.4       |     | -11.5       | -12.4       |     |                  |
|                                                                                 |                                                                              | Full range                        | -11.5       |             |     | -11.5       |             |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10 \text{ V}$                                                     | $R_L = 600 \Omega$                | 25°C        | 80          | 96  | 80          | 96          |     | dB               |
|                                                                                 |                                                                              |                                   | Full range  | 79          |     | 79          |             |     |                  |
|                                                                                 |                                                                              | $R_L = 2 \text{ k}\Omega$         | 25°C        | 90          | 109 | 90          | 109         |     |                  |
|                                                                                 |                                                                              |                                   | Full range  | 89          |     | 89          |             |     |                  |
|                                                                                 |                                                                              | $R_L = 10 \text{ k}\Omega$        | 25°C        | 95          | 118 | 95          | 118         |     |                  |
|                                                                                 |                                                                              |                                   | Full range  | 94          |     | 94          |             |     |                  |
| $r_i$ Input resistance                                                          | $V_{IC} = 0$                                                                 | 25°C                              |             | $10^{12}$   |     |             | $10^{12}$   |     | $\Omega$         |
| $c_i$ Input capacitance                                                         | Common mode                                                                  | $V_{IC} = 0, \text{See Figure 5}$ | 25°C        | 7.5         |     | 7.5         |             |     | pF               |
|                                                                                 | Differential                                                                 |                                   | 25°C        | 2.5         |     | 2.5         |             |     |                  |
| $z_o$ Open-loop output impedance                                                | $f = 1 \text{ MHz}$                                                          | 25°C                              |             | 80          |     |             | 80          |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, V_O = 0, R_S = 50 \Omega$                              | 25°C                              | 80          | 98          |     | 80          | 98          |     | dB               |
|                                                                                 |                                                                              | Full range                        | 79          |             |     | 79          |             |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}, V_O = 0, R_S = 50 \Omega$ | 25°C                              | 82          | 99          |     | 82          | 99          |     | dB               |
|                                                                                 |                                                                              | Full range                        | 80          |             |     | 80          |             |     |                  |

$^\dagger$  Full range is  $-40^\circ C$  to  $85^\circ C$ .

**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2082I electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted) (continued)**

| PARAMETER             |                                   | TEST CONDITIONS      |                        | T <sub>A</sub> | TLE2082I |     |     | TLE2082AI |     |     | UNIT |
|-----------------------|-----------------------------------|----------------------|------------------------|----------------|----------|-----|-----|-----------|-----|-----|------|
|                       |                                   |                      |                        |                | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| I <sub>CC</sub>       | Supply current<br>(both channels) | V <sub>O</sub> = 0,  | No load                | 25°C           | 2.7      | 3.1 | 3.9 | 2.7       | 3.1 | 3.9 | mA   |
|                       |                                   |                      |                        | Full range     | 3.9      |     |     | 3.9       |     |     |      |
| Crosstalk attenuation |                                   | V <sub>IC</sub> = 0, | R <sub>L</sub> = 2 kΩ  | 25°C           | 120      |     |     | 120       |     |     | dB   |
| I <sub>OS</sub>       | Short-circuit output current      | V <sub>O</sub> = 0   | V <sub>ID</sub> = 1 V  | 25°C           | −30      | −45 |     | −30       | −45 |     | mA   |
|                       |                                   |                      | V <sub>ID</sub> = −1 V |                | 30       | 48  |     | 30        | 48  |     |      |

**TLE2082I operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                               |                     | T <sub>A</sub> <sup>†</sup> | TLE2082I |     |        | TLE2082AI |     |        | UNIT   |
|--------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------|-----------------------------|----------|-----|--------|-----------|-----|--------|--------|
|                    |                                             |                                                                                                               |                     |                             | MIN      | TYP | MAX    | MIN       | TYP | MAX    |        |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = 10 V, A <sub>VD</sub> = −1, R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF, See Figure 1 |                     | 25°C                        | 28       | 40  |        | 28        | 40  |        | V/μs   |
|                    | Full range                                  |                                                                                                               |                     | 22                          |          |     | 22     |           |     |        |        |
| SR −               | Negative slew rate                          |                                                                                                               |                     | 25°C                        | 30       | 45  |        | 30        | 45  |        | V/μs   |
|                    |                                             |                                                                                                               |                     | Full range                  | 22       |     |        | 22        |     |        |        |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1, 10-V step, R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 100 pF                               | To 10 mV            | 25°C                        | 0.4      |     |        | 0.4       |     |        | μs     |
|                    |                                             |                                                                                                               | To 1 mV             |                             | 1.5      |     |        | 1.5       |     |        |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω, See Figure 3                                                                           | f = 10 Hz           | 25°C                        | 28       |     |        | 28        |     |        | nV/√Hz |
|                    |                                             |                                                                                                               | f = 10 kHz          |                             | 11.6     |     |        | 11.6      |     |        |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                               | f = 10 Hz to 10 kHz | 25°C                        | 6        |     |        | 6         |     |        | μV     |
|                    |                                             |                                                                                                               | f = 0.1 Hz to 10 Hz |                             | 0.6      |     |        | 0.6       |     |        |        |
| I <sub>n</sub>     | Equivalent input noise current              | V <sub>IC</sub> = 0, f = 10 kHz                                                                               | 25°C                | 2.8                         |          |     | 2.8    |           |     | fA/√Hz |        |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = 10, f = 1 kHz, R <sub>S</sub> = 25 Ω                             | 25°C                | 0.008%                      |          |     | 0.008% |           |     |        |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF, R <sub>L</sub> = 2 kΩ, See Figure 2                           | 25°C                | 8                           | 10       |     | 8      | 10        |     | MHz    |        |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 20 V, R <sub>L</sub> = 2 kΩ, A <sub>VD</sub> = −1, C <sub>L</sub> = 25 pF                | 25°C                | 478                         | 637      |     | 478    | 637       |     | kHz    |        |
| ϕ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF, R <sub>L</sub> = 2 kΩ, See Figure 2                           | 25°C                | 57°                         |          |     | 57°    |           |     |        |        |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $85^\circ\text{C}$ .

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2082M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                              | $T_A^\dagger$              | TLE2082M   |           |     | TLE2082AM |           |     | UNIT             |
|---------------------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------|------------|-----------|-----|-----------|-----------|-----|------------------|
|                                                                                 |                                                                              |                            | MIN        | TYP       | MAX | MIN       | TYP       | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, V_O = 0, R_S = 50 \Omega$                                       | 25°C                       | 0.9        | 7         |     | 0.65      | 4         |     | mV               |
|                                                                                 |                                                                              | Full range                 |            | 9.5       |     |           | 6.5       |     |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                                              | Full range                 | 2.3        | 25*       |     | 2.3       | 25*       |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   | $V_{IC} = 0, V_O = 0, \text{See Figure 4}$                                   | 25°C                       | 5          | 100       |     | 5         | 100       |     | pA               |
|                                                                                 |                                                                              | Full range                 |            | 20        |     |           | 20        |     | nA               |
| $I_{IB}$ Input bias current                                                     |                                                                              | 25°C                       | 15         | 175       |     | 15        | 175       |     | pA               |
|                                                                                 |                                                                              | Full range                 |            | 60        |     |           | 60        |     | nA               |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50 \Omega$                                                            | 25°C                       | 5 to -1    | 5 to -1.9 |     | 5 to -1   | 5 to -1.9 |     | V                |
|                                                                                 |                                                                              | Full range                 | 5 to -0.8  |           |     | 5 to -0.8 |           |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -200 \mu A$                                                           | 25°C                       | 3.8        | 4.1       |     | 3.8       | 4.1       |     | V                |
|                                                                                 |                                                                              | Full range                 | 3.6        |           |     | 3.6       |           |     |                  |
|                                                                                 | $I_O = -2 \text{ mA}$                                                        | 25°C                       | 3.5        | 3.9       |     | 3.5       | 3.9       |     |                  |
|                                                                                 |                                                                              | Full range                 | 3.3        |           |     | 3.3       |           |     |                  |
|                                                                                 | $I_O = -20 \text{ mA}$                                                       | 25°C                       | 1.5        | 2.3       |     | 1.5       | 2.3       |     |                  |
|                                                                                 |                                                                              | Full range                 | 1.4        |           |     | 1.4       |           |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 200 \mu A$                                                            | 25°C                       | -3.8       | -4.2      |     | -3.8      | -4.2      |     | V                |
|                                                                                 |                                                                              | Full range                 | -3.6       |           |     | -3.6      |           |     |                  |
|                                                                                 | $I_O = 2 \text{ mA}$                                                         | 25°C                       | -3.5       | -4.1      |     | -3.5      | -4.1      |     |                  |
|                                                                                 |                                                                              | Full range                 | -3.3       |           |     | -3.3      |           |     |                  |
|                                                                                 | $I_O = 20 \text{ mA}$                                                        | 25°C                       | -1.5       | -2.4      |     | -1.5      | -2.4      |     |                  |
|                                                                                 |                                                                              | Full range                 | -1.4       |           |     | -1.4      |           |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 2.3 \text{ V}$                                                    | $R_L = 600 \Omega$         | 25°C       | 80        | 91  | 80        | 91        |     | dB               |
|                                                                                 |                                                                              |                            | Full range | 78        |     | 78        |           |     |                  |
|                                                                                 |                                                                              | $R_L = 2 \text{ k}\Omega$  | 25°C       | 90        | 100 | 90        | 100       |     |                  |
|                                                                                 |                                                                              |                            | Full range | 88        |     | 88        |           |     |                  |
|                                                                                 |                                                                              | $R_L = 10 \text{ k}\Omega$ | 25°C       | 95        | 106 | 95        | 106       |     |                  |
|                                                                                 |                                                                              |                            | Full range | 93        |     | 93        |           |     |                  |
| $r_i$ Input resistance                                                          | $V_{IC} = 0$                                                                 | 25°C                       |            | $10^{12}$ |     |           | $10^{12}$ |     | $\Omega$         |
| $c_i$ Input capacitance                                                         | Common mode                                                                  | 25°C                       |            | 11        |     |           | 11        |     | pF               |
|                                                                                 | Differential                                                                 | 25°C                       |            | 2.5       |     |           | 2.5       |     |                  |
| $z_o$ Open-loop output impedance                                                | $f = 1 \text{ MHz}$                                                          | 25°C                       |            | 80        |     |           | 80        |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, V_O = 0, R_S = 50 \Omega$                              | 25°C                       | 70         | 89        |     | 70        | 89        |     | dB               |
|                                                                                 |                                                                              | Full range                 | 68         |           |     | 68        |           |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}, V_O = 0, R_S = 50 \Omega$ | 25°C                       | 82         | 99        |     | 82        | 99        |     | dB               |
|                                                                                 |                                                                              | Full range                 | 80         |           |     | 80        |           |     |                  |

\*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is -55°C to 125°C.



**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2082M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V (unless otherwise noted) (continued)**

| PARAMETER             |                                   | TEST CONDITIONS      |                        | T <sub>A</sub> <sup>†</sup> | TLE2082M |     |     | TLE2082AM |     |     | UNIT |
|-----------------------|-----------------------------------|----------------------|------------------------|-----------------------------|----------|-----|-----|-----------|-----|-----|------|
|                       |                                   |                      |                        |                             | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| I <sub>CC</sub>       | Supply current<br>(both channels) | V <sub>O</sub> = 0,  | No load                | 25°C                        | 2.7      | 2.9 | 3.6 | 2.7       | 2.9 | 3.6 | mA   |
|                       |                                   |                      |                        | Full range                  | 3.6      |     |     | 3.6       |     |     |      |
| Crosstalk attenuation |                                   | V <sub>IC</sub> = 0, | R <sub>L</sub> = 2 kΩ  | 25°C                        | 120      |     |     | 120       |     |     | dB   |
| I <sub>OS</sub>       | Short-circuit output current      | V <sub>O</sub> = 0   | V <sub>ID</sub> = 1 V  | 25°C                        | −35      |     |     | −35       |     |     | mA   |
|                       |                                   |                      | V <sub>ID</sub> = −1 V |                             | 45       |     |     | 45        |     |     |      |

$^\dagger$  Full range is –55°C to 125°C.

**TLE2082M operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                                 |                     | T <sub>A</sub> † | TLE2082M |      |        | TLE2082AM |     |        | UNIT   |
|--------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|---------------------|------------------|----------|------|--------|-----------|-----|--------|--------|
|                    |                                             |                                                                                                                                 |                     |                  | MIN      | TYP  | MAX    | MIN       | TYP | MAX    |        |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = ±2.3 V,<br>A <sub>VD</sub> = −1,      R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 100 pF,      See Figure 1 |                     | 25°C             | 35       |      |        | 35        |     |        | V/μs   |
|                    | Full range                                  |                                                                                                                                 |                     | 18*              |          |      | 18*    |           |     |        |        |
| SR −               | Negative slew rate                          |                                                                                                                                 |                     | 25°C             | 38       |      |        | 38        |     |        | V/μs   |
|                    | Full range                                  |                                                                                                                                 |                     | 18*              |          |      | 18*    |           |     |        |        |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1, 2-V step,<br>R <sub>L</sub> = 1 kΩ,<br>C <sub>L</sub> = 100 pF                                            | To 10 mV            | 25°C             | 0.25     |      |        | 0.25      |     |        | μs     |
|                    |                                             | To 1 mV                                                                                                                         | 0.4                 |                  |          | 0.4  |        |           |     |        |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω,<br>See Figure 3                                                                                          | f = 10 Hz           | 25°C             | 28       |      |        | 28        |     |        | nV/√Hz |
|                    | f = 10 kHz                                  |                                                                                                                                 | 11.6                |                  |          | 11.6 |        |           |     |        |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                                                 | f = 10 Hz to 10 kHz | 25°C             | 6        |      |        | 6         |     |        | μV     |
|                    |                                             |                                                                                                                                 | f = 0.1 Hz to 10 Hz |                  | 0.6      |      |        | 0.6       |     |        |        |
| I <sub>n</sub>     | Equivalent input noise current              | V <sub>IC</sub> = 0,      f = 10 kHz                                                                                            | 25°C                | 2.8              |          |      | 2.8    |           |     | fA/√Hz |        |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 5 V,      A <sub>VD</sub> = 10,<br>f = 1 kHz,      R <sub>L</sub> = 2 kΩ,<br>R <sub>S</sub> = 25 Ω         | 25°C                | 0.013%           |          |      | 0.013% |           |     |        |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV,      R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 25 pF,      See Figure 2                                | 25°C                | 9.4              |          |      | 9.4    |           |     | MHz    |        |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 4 V,      A <sub>VD</sub> = −1,<br>R <sub>L</sub> = 2 kΩ ,      C <sub>L</sub> = 25 pF                     | 25°C                | 2.8              |          |      | 2.8    |           |     | MHz    |        |
| φ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV,      R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 25 pF,      See Figure 2                                | 25°C                | 56°              |          |      | 56°    |           |     |        |        |

\*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

$^\dagger$  Full range is –55°C to 125°C.

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2082M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                     | TEST CONDITIONS                                                              | $T_A^\dagger$                     | TLE2082M    |             |     | TLE2082AM   |             |     | UNIT             |
|-------------------------------------------------------------------------------|------------------------------------------------------------------------------|-----------------------------------|-------------|-------------|-----|-------------|-------------|-----|------------------|
|                                                                               |                                                                              |                                   | MIN         | TYP         | MAX | MIN         | TYP         | MAX |                  |
| $V_{IO}$ Input offset voltage                                                 | $V_{IC} = 0, V_O = 0, R_S = 50 \Omega$                                       | 25°C                              | 1.1         | 7           |     | 0.7         | 4           |     | mV               |
|                                                                               |                                                                              | Full range                        |             | 9.5         |     |             | 6.5         |     |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                |                                                                              | Full range                        | 2.4         | 25*         |     | 2.4         | 25*         |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                 | $V_{IC} = 0, V_O = 0, \text{See Figure 4}$                                   | 25°C                              | 6           | 100         |     | 6           | 100         |     | pA               |
|                                                                               |                                                                              | Full range                        |             | 20          |     |             | 20          |     | nA               |
| $I_{IB}$ Input bias current                                                   |                                                                              | 25°C                              | 20          | 175         |     | 20          | 175         |     | pA               |
|                                                                               |                                                                              | Full range                        |             | 65          |     |             | 65          |     | nA               |
| $V_{ICR}$ Common-mode input voltage range                                     | $R_S = 50 \Omega$                                                            | 25°C                              | 15 to -11   | 15 to -11.9 |     | 15 to -11   | 15 to -11.9 |     | V                |
|                                                                               |                                                                              | Full range                        | 15 to -10.8 |             |     | 15 to -10.8 |             |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                          | $I_O = -200 \mu A$                                                           | 25°C                              | 13.8        | 14.1        |     | 13.8        | 14.1        |     | V                |
|                                                                               |                                                                              | Full range                        | 13.6        |             |     | 13.6        |             |     |                  |
|                                                                               | $I_O = -2 \text{ mA}$                                                        | 25°C                              | 13.5        | 13.9        |     | 13.5        | 13.9        |     |                  |
|                                                                               |                                                                              | Full range                        | 13.3        |             |     | 13.3        |             |     |                  |
|                                                                               | $I_O = -20 \text{ mA}$                                                       | 25°C                              | 11.5        | 12.3        |     | 11.5        | 12.3        |     |                  |
|                                                                               |                                                                              | Full range                        | 11.4        |             |     | 11.4        |             |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                          | $I_O = 200 \mu A$                                                            | 25°C                              | -13.8       | -14.2       |     | -13.8       | -14.2       |     | V                |
|                                                                               |                                                                              | Full range                        | -13.6       |             |     | -13.6       |             |     |                  |
|                                                                               | $I_O = 2 \text{ mA}$                                                         | 25°C                              | -13.5       | -14         |     | -13.5       | -14         |     |                  |
|                                                                               |                                                                              | Full range                        | -13.3       |             |     | -13.3       |             |     |                  |
|                                                                               | $I_O = 20 \text{ mA}$                                                        | 25°C                              | -11.5       | -12.4       |     | -11.5       | -12.4       |     |                  |
|                                                                               |                                                                              | Full range                        | -11.4       |             |     | -11.4       |             |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                      | $V_O = \pm 10 \text{ V}$                                                     | $R_L = 600 \Omega$                | 25°C        | 80          | 96  | 80          | 96          |     | dB               |
|                                                                               |                                                                              |                                   | Full range  | 78          |     | 78          |             |     |                  |
|                                                                               |                                                                              | $R_L = 2 \text{ k}\Omega$         | 25°C        | 90          | 109 | 90          | 109         |     |                  |
|                                                                               |                                                                              |                                   | Full range  | 88          |     | 88          |             |     |                  |
|                                                                               |                                                                              | $R_L = 10 \text{ k}\Omega$        | 25°C        | 95          | 118 | 95          | 118         |     |                  |
|                                                                               |                                                                              |                                   | Full range  | 93          |     | 93          |             |     |                  |
| $r_i$ Input resistance                                                        | $V_{IC} = 0$                                                                 | 25°C                              | $10^{12}$   |             |     | $10^{12}$   |             |     | $\Omega$         |
| $c_i$ Input capacitance                                                       | Common mode                                                                  | $V_{IC} = 0, \text{See Figure 5}$ | 25°C        | 7.5         |     | 7.5         |             |     | pF               |
|                                                                               | Differential                                                                 |                                   | 25°C        | 2.5         |     | 2.5         |             |     |                  |
| $z_o$ Open-loop output impedance                                              | $f = 1 \text{ MHz}$                                                          | 25°C                              | 80          |             |     | 80          |             |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                              | $V_{IC} = V_{ICRmin}, V_O = 0, R_S = 50 \Omega$                              | 25°C                              | 80          | 98          |     | 80          | 98          |     | dB               |
|                                                                               |                                                                              | Full range                        | 78          |             |     | 78          |             |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}, V_O = 0, R_S = 50 \Omega$ | 25°C                              | 82          | 99          |     | 82          | 99          |     | dB               |
|                                                                               |                                                                              | Full range                        | 80          |             |     | 80          |             |     |                  |

\*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

$^\dagger$  Full range is  $-55^\circ\text{C}$  to  $125^\circ\text{C}$ .



**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2082M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**  
**(continued)**

| PARAMETER             |                                   | TEST CONDITIONS      |                        | T <sub>A</sub> <sup>†</sup> | TLE2082M |     |     | TLE2082AM |     |     | UNIT |
|-----------------------|-----------------------------------|----------------------|------------------------|-----------------------------|----------|-----|-----|-----------|-----|-----|------|
|                       |                                   |                      |                        |                             | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| I <sub>CC</sub>       | Supply current<br>(both channels) | V <sub>O</sub> = 0,  | No load                | 25°C                        | 2.7      | 3.1 | 3.6 | 2.7       | 3.1 | 3.6 | mA   |
|                       |                                   |                      |                        | Full range                  | 3.6      |     |     | 3.6       |     |     |      |
| Crosstalk attenuation |                                   | V <sub>IC</sub> = 0, | R <sub>L</sub> = 2 kΩ  | 25°C                        | 120      |     |     | 120       |     |     | dB   |
| I <sub>OS</sub>       | Short-circuit output current      | V <sub>O</sub> = 0   | V <sub>ID</sub> = 1 V  | 25°C                        | −30      | −45 |     | −30       | −45 |     | mA   |
|                       |                                   |                      | V <sub>ID</sub> = −1 V |                             | 30       | 48  |     | 30        | 48  |     |      |

$^\dagger$  Full range is –55°C to 125°C.

**TLE2082M operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                               |                     | T <sub>A</sub> <sup>†</sup> | TLE2082M |     |        | TLE2082AM |     |        | UNIT   |
|--------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------|-----------------------------|----------|-----|--------|-----------|-----|--------|--------|
|                    |                                             |                                                                                                               |                     |                             | MIN      | TYP | MAX    | MIN       | TYP | MAX    |        |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = 10 V, A <sub>VD</sub> = −1, R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF, See Figure 1 |                     | 25°C                        | 28       | 40  |        | 28        | 40  |        | V/μs   |
|                    |                                             |                                                                                                               |                     | Full range                  | 20       |     |        | 20        |     |        |        |
| SR −               | Negative slew rate                          |                                                                                                               |                     | 25°C                        | 30       | 45  |        | 30        | 45  |        | V/μs   |
|                    |                                             |                                                                                                               |                     | Full range                  | 20       |     |        | 20        |     |        |        |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1, 10-V step, R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 100 pF                               | To 10 mV            | 25°C                        | 0.4      |     |        | 0.4       |     |        | μs     |
|                    |                                             |                                                                                                               | To 1 mV             |                             | 1.5      |     |        | 1.5       |     |        |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω, See Figure 3                                                                           | f = 10 Hz           | 25°C                        | 28       |     |        | 28        |     |        | nV/√Hz |
|                    |                                             |                                                                                                               | f = 10 kHz          |                             | 11.6     |     |        | 11.6      |     |        |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                               | f = 10 Hz to 10 kHz | 25°C                        | 6        |     |        | 6         |     |        | μV     |
|                    |                                             |                                                                                                               | f = 0.1 Hz to 10 Hz |                             | 0.6      |     |        | 0.6       |     |        |        |
| I <sub>n</sub>     | Equivalent input noise current              | V <sub>IC</sub> = 0, f = 10 kHz                                                                               | 25°C                | 2.8                         |          |     | 2.8    |           |     | fA/√Hz |        |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = 10, f = 1 kHz, R <sub>L</sub> = 2 kΩ, R <sub>S</sub> = 25 Ω      | 25°C                | 0.008%                      |          |     | 0.008% |           |     |        |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF, R <sub>L</sub> = 2 kΩ, See Figure 2                           | 25°C                | 8*                          | 10       |     | 8*     | 10        |     | MHz    |        |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 20 V, R <sub>L</sub> = 2 kΩ, A <sub>VD</sub> = −1, C <sub>L</sub> = 25 pF                | 25°C                | 478*                        | 637      |     | 478*   | 637       |     | kHz    |        |
| ϕ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV, C <sub>L</sub> = 25 pF, R <sub>L</sub> = 2 kΩ, See Figure 2                           | 25°C                | 57°                         |          |     | 57°    |           |     |        |        |

\*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

$^\dagger$  Full range is –55°C to 125°C.

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

#### TLE2082Y electrical characteristics at $V_{CC\pm} = \pm 15\text{ V}$ , $T_A = 25^\circ\text{C}$

| PARAMETER |                                                                       | TEST CONDITIONS                                                                   |                           | TLE2082Y        |                  |     | UNIT     |
|-----------|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------|-----------------|------------------|-----|----------|
|           |                                                                       |                                                                                   |                           | MIN             | TYP              | MAX |          |
| $V_{IO}$  | Input offset voltage                                                  | $V_{IC} = 0$ , $V_O = 0$ , $R_S = 50\ \Omega$                                     |                           | 1.1             | 6                |     | mV       |
| $I_{IO}$  | Input offset current                                                  | $V_{IC} = 0$ , $V_O = 0$ , See Figure 4                                           |                           | 6               | 100              |     | pA       |
| $I_{IB}$  | Input bias current                                                    |                                                                                   |                           | 20              | 175              |     | pA       |
| $V_{ICR}$ | Common-mode input voltage range                                       | $R_S = 50\ \Omega$                                                                |                           | 15<br>to<br>–11 | 15<br>to<br>11.9 |     | V        |
| $V_{OM+}$ | Maximum positive peak output voltage swing                            | $I_O = -200\ \mu\text{A}$                                                         |                           | 13.8            | 14.1             |     | V        |
|           |                                                                       | $I_O = -2\text{ mA}$                                                              |                           | 13.5            | 13.9             |     |          |
|           |                                                                       | $I_O = -20\text{ mA}$                                                             |                           | 11.5            | 12.3             |     |          |
| $V_{OM-}$ | Maximum negative peak output voltage swing                            | $I_O = 200\ \mu\text{A}$                                                          |                           | –13.8           | –14.2            |     | V        |
|           |                                                                       | $I_O = 2\text{ mA}$                                                               |                           | –13.5           | –14              |     |          |
|           |                                                                       | $I_O = 20\text{ mA}$                                                              |                           | –11.5           | –12.4            |     |          |
| $A_{VD}$  | Large-signal differential voltage amplification                       | $V_O = \pm 10\text{ V}$                                                           | $R_L = 600\ \Omega$       | 80              | 96               |     | dB       |
|           |                                                                       |                                                                                   | $R_L = 2\text{ k}\Omega$  | 90              | 109              |     |          |
|           |                                                                       |                                                                                   | $R_L = 10\text{ k}\Omega$ | 95              | 118              |     |          |
| $r_i$     | Input resistance                                                      | $V_{IC} = 0$                                                                      |                           | 10              | 12               |     | $\Omega$ |
| $c_i$     | Input capacitance                                                     | Common mode                                                                       | $V_O = 0$ , See Figure 5  | 7.5             |                  |     | pF       |
|           |                                                                       | Differential                                                                      |                           | 2.5             |                  |     |          |
| $z_o$     | Open-loop output impedance                                            | $f = 1\text{ MHz}$                                                                |                           | 80              |                  |     | $\Omega$ |
| CMRR      | Common-mode rejection ratio                                           | $V_{IC} = V_{ICRmin}$ , $V_O = 0$ , $R_S = 50\ \Omega$                            |                           | 80              | 98               |     | dB       |
| $k_{SVR}$ | Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\text{ V to } \pm 15\text{ V}$ , $R_S = 50\ \Omega$ , $V_O = 0$ |                           | 82              | 99               |     | dB       |
| $I_{CC}$  | Supply current (both channels)                                        | $V_O = 0$ , No load                                                               |                           | 2.7             | 3.1              | 3.9 | mA       |
| $I_{OS}$  | Short-circuit output current                                          | $V_O = 0$                                                                         | $V_{ID} = 1\text{ V}$     | –30             | –45              |     | mA       |
|           |                                                                       |                                                                                   | $V_{ID} = -1\text{ V}$    | 30              | 48               |     |          |

**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2084C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                    | $T_A$ †               | TLE2084C   |           |     | TLE2084AC |           |     | UNIT              |
|---------------------------------------------------------------------------------|--------------------------------------------------------------------|-----------------------|------------|-----------|-----|-----------|-----------|-----|-------------------|
|                                                                                 |                                                                    |                       | MIN        | TYP       | MAX | MIN       | TYP       | MAX |                   |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, V_O = 0,$<br>$R_S = 50 \Omega$                        | 25°C                  | -1.6       | 7         |     | -0.5      | 4         |     | mV                |
|                                                                                 |                                                                    | Full range            |            |           | 9.1 |           |           | 6.1 |                   |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                                    | Full range            |            | 10.1      | 30  |           | 10.1      | 30  | $\mu V/^{\circ}C$ |
| $I_{IO}$ Input offset current                                                   | $V_{IC} = 0, V_O = 0,$<br>See Figure 4                             | 25°C                  |            | 15        | 100 |           | 15        | 100 | pA                |
|                                                                                 |                                                                    | Full range            |            |           | 1.4 |           |           | 1.4 |                   |
| $I_{IB}$ Input bias current                                                     |                                                                    | 25°C                  |            | 20        | 175 |           | 20        | 175 | pA                |
|                                                                                 |                                                                    | Full range            |            |           | 5   |           |           | 5   | nA                |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50 \Omega$                                                  | 25°C                  | 5 to -1    | 5 to -1.9 |     | 5 to -1   | 5 to -1.9 |     | V                 |
|                                                                                 |                                                                    | Full range            |            | 5 to -0.9 |     |           | 5 to -0.9 |     |                   |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -200 \mu A$                                                 | 25°C                  | 3.8        | 4.1       |     | 3.8       | 4.1       |     | V                 |
|                                                                                 |                                                                    | Full range            |            | 3.7       |     |           | 3.7       |     |                   |
|                                                                                 | $I_O = -2$ mA                                                      | 25°C                  | 3.5        | 3.9       |     | 3.5       | 3.9       |     |                   |
|                                                                                 |                                                                    | Full range            |            | 3.4       |     |           | 3.4       |     |                   |
|                                                                                 | $I_O = -20$ mA                                                     | 25°C                  | 1.5        | 2.3       |     | 1.5       | 2.3       |     |                   |
|                                                                                 |                                                                    | Full range            |            | 1.5       |     |           | 1.5       |     |                   |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 200 \mu A$                                                  | 25°C                  | -3.8       | -4.2      |     | -3.8      | -4.2      |     | V                 |
|                                                                                 |                                                                    | Full range            |            | -3.7      |     |           | -3.7      |     |                   |
|                                                                                 | $I_O = 2$ mA                                                       | 25°C                  | -3.5       | -4.1      |     | -3.5      | -4.1      |     |                   |
|                                                                                 |                                                                    | Full range            |            | -3.4      |     |           | -3.4      |     |                   |
|                                                                                 | $I_O = 20$ mA                                                      | 25°C                  | -1.5       | -2.4      |     | -1.5      | -2.4      |     |                   |
|                                                                                 |                                                                    | Full range            |            | -1.5      |     |           | -1.5      |     |                   |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 2.3$ V                                                  | $R_L = 600 \Omega$    | 25°C       | 80        | 91  | 80        | 91        |     | dB                |
|                                                                                 |                                                                    |                       | Full range |           | 79  |           | 79        |     |                   |
|                                                                                 |                                                                    | $R_L = 2$ k $\Omega$  | 25°C       | 90        | 100 | 90        | 100       |     |                   |
|                                                                                 |                                                                    |                       | Full range |           | 89  |           | 89        |     |                   |
|                                                                                 |                                                                    | $R_L = 10$ k $\Omega$ | 25°C       | 95        | 106 | 95        | 106       |     |                   |
|                                                                                 |                                                                    |                       | Full range |           | 94  |           | 94        |     |                   |
| $r_i$ Input resistance                                                          | $V_{IC} = 0$                                                       | 25°C                  |            | $10^{12}$ |     |           | $10^{12}$ |     | $\Omega$          |
| $c_i$ Input capacitance                                                         | $V_{IC} = 0,$<br>See Figure 5                                      | Common mode           | 25°C       |           | 11  |           | 11        |     | pF                |
|                                                                                 |                                                                    | Differential          | 25°C       |           | 2.5 |           | 2.5       |     |                   |
| $z_o$ Open-loop output impedance                                                | $f = 1$ MHz                                                        | 25°C                  |            | 80        |     |           | 80        |     | $\Omega$          |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, V_O = 0,$<br>$R_S = 50 \Omega$               | 25°C                  | 70         | 89        |     | 70        | 89        |     | dB                |
|                                                                                 |                                                                    | Full range            |            | 68        |     |           | 68        |     |                   |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5$ V to $\pm 15$ V,<br>$V_O = 0, R_S = 50 \Omega$ | 25°C                  | 82         | 99        |     | 82        | 99        |     | dB                |
|                                                                                 |                                                                    | Full range            |            | 80        |     |           | 80        |     |                   |
| $I_{CC}$ Supply current (four amplifiers)                                       | $V_O = 0,$ No load                                                 | 25°C                  | 5.2        | 6.3       | 7.5 | 5.2       | 6.3       | 7.5 | mA                |
|                                                                                 |                                                                    | Full range            |            |           | 7.5 |           |           | 7.5 |                   |
| $a_x$ Crosstalk attenuation                                                     | $V_{IC} = 0, R_L = 2$ k $\Omega$                                   | 25°C                  |            | 120       |     |           | 120       |     | dB                |

† Full range is 0°C to 70°C.

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2084C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V (unless otherwise noted) (continued)**

| PARAMETER       |                              | TEST CONDITIONS    |                        | T <sub>A</sub> <sup>†</sup> | TLE2084C |     |     | TLE2084AC |     |     | UNIT |
|-----------------|------------------------------|--------------------|------------------------|-----------------------------|----------|-----|-----|-----------|-----|-----|------|
|                 |                              |                    |                        |                             | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| I <sub>OS</sub> | Short-circuit output current | V <sub>O</sub> = 0 | V <sub>ID</sub> = 1 V  | 25°C                        | –35      |     |     | –35       |     |     | mA   |
|                 |                              |                    | V <sub>ID</sub> = –1 V |                             | 45       |     |     | 45        |     |     |      |

$^\dagger$  Full range is 0°C to 70°C.

**TLE2084C operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                                 |                                                 | T <sub>A</sub> <sup>†</sup> | TLE2084C |     |     | TLE2084AC |     |     | UNIT   |
|--------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-----------------------------|----------|-----|-----|-----------|-----|-----|--------|
|                    |                                             |                                                                                                                                 |                                                 |                             | MIN      | TYP | MAX | MIN       | TYP | MAX |        |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = ±2.3 V,<br>A <sub>VD</sub> = −1,      R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 100 pF,      See Figure 1 |                                                 | 25°C                        | 35       |     |     | 35        |     |     | V/μs   |
|                    |                                             |                                                                                                                                 |                                                 | Full range                  | 22       |     |     | 22        |     |     |        |
| SR −               | Negative slew rate                          |                                                                                                                                 |                                                 | 25°C                        | 38       |     |     | 38        |     |     | V/μs   |
|                    |                                             |                                                                                                                                 |                                                 | Full range                  | 22       |     |     | 22        |     |     |        |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1,<br>2-V step,<br>R <sub>L</sub> = 1 kΩ,<br>C <sub>L</sub> = 100 pF                                         | To 10 mV                                        | 25°C                        | 0.25     |     |     | 0.25      |     |     | μs     |
|                    |                                             |                                                                                                                                 | To 1 mV                                         |                             | 0.4      |     |     | 0.4       |     |     |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω,<br>See Figure 3                                                                                          | f = 10 Hz                                       | 25°C                        | 28       |     |     | 28        |     |     | nV/√Hz |
|                    |                                             |                                                                                                                                 | f = 10 kHz                                      |                             | 11.6     |     |     | 11.6      |     |     |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                                                 | f = 10 Hz to 10 kHz                             | 25°C                        | 6        |     |     | 6         |     |     | μV     |
|                    |                                             |                                                                                                                                 | f = 0.1Hz to 10 Hz                              |                             | 0.6      |     |     | 0.6       |     |     |        |
| I <sub>n</sub>     | Equivalent input noise current              | V <sub>IC</sub> = 0,                                                                                                            | f = 10 kHz                                      | 25°C                        | 2.8      |     |     | 2.8       |     |     | fA/√Hz |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 5 V,<br>f = 1 kHz,<br>R <sub>S</sub> = 25 Ω                                                                | A <sub>VD</sub> = 10,<br>R <sub>L</sub> = 2 kΩ, | 25°C                        | 0.013%   |     |     | 0.013%    |     |     |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,                                                                              | R <sub>L</sub> = 2 kΩ,<br>See Figure 2          | 25°C                        | 9.4      |     |     | 9.4       |     |     | MHz    |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 4 V,<br>R <sub>L</sub> = 2 kΩ ,                                                                            | A <sub>VD</sub> = −1,<br>C <sub>L</sub> = 25 pF | 25°C                        | 2.8      |     |     | 2.8       |     |     | MHz    |
| ϕ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,                                                                              | R <sub>L</sub> = 2 kΩ,<br>See Figure 2          | 25°C                        | 56°      |     |     | 56°       |     |     |        |

$^\dagger$  Full range is 0°C to 70°C.

**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2084C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                     | TEST CONDITIONS                                                              | $T_A^\dagger$              | TLE2084C    |             |     | TLE2084AC   |             |     | UNIT             |
|-------------------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------|-------------|-------------|-----|-------------|-------------|-----|------------------|
|                                                                               |                                                                              |                            | MIN         | TYP         | MAX | MIN         | TYP         | MAX |                  |
| $V_{IO}$ Input offset voltage                                                 | $V_{IC} = 0, V_O = 0, R_S = 50 \Omega$                                       | 25°C                       | -1.6        | 7           |     | -0.5        | 4           |     | mV               |
|                                                                               |                                                                              | Full range                 |             |             | 9.1 |             |             | 6.1 |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                |                                                                              | Full range                 | 10.1        | 30          |     | 10.1        | 30          |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                 | $V_{IC} = 0, V_O = 0, \text{See Figure 4}$                                   | 25°C                       | 15          | 100         |     | 15          | 100         |     | pA               |
|                                                                               |                                                                              | Full range                 |             |             | 1.4 |             |             | 1.4 |                  |
| $I_{IB}$ Input bias current                                                   |                                                                              | 25°C                       | 25          | 175         |     | 25          | 175         |     | pA               |
|                                                                               |                                                                              | Full range                 |             |             | 5   |             |             | 5   |                  |
| $V_{ICR}$ Common-mode input voltage range                                     | $R_S = 50 \Omega$                                                            | 25°C                       | 15 to -11   | 15 to -11.9 |     | 15 to -11   | 15 to -11.9 |     | V                |
|                                                                               |                                                                              | Full range                 | 15 to -10.9 |             |     | 15 to -10.9 |             |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                          | $I_O = -200 \mu A$                                                           | 25°C                       | 13.8        | 14.1        |     | 13.8        | 14.1        |     | V                |
|                                                                               |                                                                              | Full range                 | 13.7        |             |     | 13.7        |             |     |                  |
|                                                                               | $I_O = -2 \text{ mA}$                                                        | 25°C                       | 13.5        | 13.9        |     | 13.5        | 13.9        |     |                  |
|                                                                               |                                                                              | Full range                 | 13.4        |             |     | 13.4        |             |     |                  |
|                                                                               | $I_O = -20 \text{ mA}$                                                       | 25°C                       | 11.5        | 12.3        |     | 11.5        | 12.3        |     |                  |
|                                                                               |                                                                              | Full range                 | 11.5        |             |     | 11.5        |             |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                          | $I_O = 200 \mu A$                                                            | 25°C                       | -13.8       | -14.2       |     | -13.8       | -14.2       |     | V                |
|                                                                               |                                                                              | Full range                 | -13.7       |             |     | -13.7       |             |     |                  |
|                                                                               | $I_O = 2 \text{ mA}$                                                         | 25°C                       | -13.7       | -14         |     | -13.7       | -14         |     |                  |
|                                                                               |                                                                              | Full range                 | -13.6       |             |     | -13.6       |             |     |                  |
|                                                                               | $I_O = 20 \text{ mA}$                                                        | 25°C                       | -11.5       | -12.4       |     | -11.5       | -12.4       |     |                  |
|                                                                               |                                                                              | Full range                 | -11.5       |             |     | -11.5       |             |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                      | $V_O = \pm 10 \text{ V}$                                                     | $R_L = 600 \Omega$         | 25°C        | 80          | 96  | 80          | 96          |     | dB               |
|                                                                               |                                                                              |                            | Full range  | 79          |     | 79          |             |     |                  |
|                                                                               |                                                                              | $R_L = 2 \text{ k}\Omega$  | 25°C        | 90          | 109 | 90          | 109         |     |                  |
|                                                                               |                                                                              |                            | Full range  | 89          |     | 89          |             |     |                  |
|                                                                               |                                                                              | $R_L = 10 \text{ k}\Omega$ | 25°C        | 95          | 118 | 95          | 118         |     |                  |
|                                                                               |                                                                              |                            | Full range  | 94          |     | 94          |             |     |                  |
| $r_i$ Input resistance                                                        | $V_{IC} = 0$                                                                 | 25°C                       |             | $10^{12}$   |     |             | $10^{12}$   |     | $\Omega$         |
| $c_i$ Input capacitance                                                       | $V_{IC} = 0, \text{See Figure 5}$                                            | Common mode                | 25°C        | 7.5         |     | 7.5         |             |     | pF               |
|                                                                               |                                                                              | Differential               | 25°C        | 2.5         |     | 2.5         |             |     |                  |
| $z_o$ Open-loop output impedance                                              | $f = 1 \text{ MHz}$                                                          | 25°C                       |             | 80          |     | 80          |             |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                              | $V_{IC} = V_{ICRmin}, V_O = 0, R_S = 50 \Omega$                              | 25°C                       | 80          | 98          |     | 80          | 98          |     | dB               |
|                                                                               |                                                                              | Full range                 | 79          |             |     | 79          |             |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}, V_O = 0, R_S = 50 \Omega$ | 25°C                       | 82          | 99          |     | 82          | 99          |     | dB               |
|                                                                               |                                                                              | Full range                 | 81          |             |     | 81          |             |     |                  |
| $I_{CC}$ Supply current (four amplifiers)                                     | $V_O = 0, \text{No load}$                                                    | 25°C                       | 5.2         | 6.5         | 7.5 | 5.2         | 6.5         | 7.5 | mA               |
|                                                                               |                                                                              | Full range                 |             |             | 7.5 |             |             | 7.5 |                  |
| $a_x$ Crosstalk attenuation                                                   | $V_{IC} = 0, R_L = 2 \text{ k}\Omega$                                        | 25°C                       |             | 120         |     |             | 120         |     | dB               |

$^\dagger$  Full range is 0°C to 70°C.

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2084C electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted) (continued)**

| PARAMETER                             | TEST CONDITIONS | $T_A^\dagger$   | TLE2084C |     |     | TLE2084AC |     |     | UNIT |
|---------------------------------------|-----------------|-----------------|----------|-----|-----|-----------|-----|-----|------|
|                                       |                 |                 | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| $I_{OS}$ Short-circuit output current | $V_O = 0$       | $V_{ID} = 1$ V  | –30      | –45 |     | –30       | –45 |     | mA   |
|                                       |                 | $V_{ID} = -1$ V | 30       | 48  |     | 30        | 48  |     |      |

$^\dagger$  Full range is 0°C to 70°C.

**TLE2084C operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                     |                     | T <sub>A</sub> <sup>†</sup> | TLE2084C |     |        | TLE2084AC |     |        | UNIT   |
|--------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------|---------------------|-----------------------------|----------|-----|--------|-----------|-----|--------|--------|
|                    |                                             |                                                                                                                     |                     |                             | MIN      | TYP | MAX    | MIN       | TYP | MAX    |        |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = 10 V, A <sub>VD</sub> = −1,<br>R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF,<br>See Figure 1 |                     | 25°C                        | 25       | 40  |        | 25        | 40  |        | V/μs   |
|                    |                                             |                                                                                                                     |                     | Full range                  | 22       |     |        | 22        |     |        |        |
| SR −               | Negative slew rate                          |                                                                                                                     |                     | 25°C                        | 30       | 45  |        | 30        | 45  |        | V/μs   |
|                    |                                             |                                                                                                                     |                     | Full range                  | 25       |     |        | 25        |     |        |        |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1,<br>10-V step,<br>R <sub>L</sub> = 1 kΩ,<br>C <sub>L</sub> = 100 pF                            | To 10 mV            | 25°C                        | 0.4      |     |        | 0.4       |     |        | μs     |
|                    |                                             |                                                                                                                     | To 1 mV             |                             | 1.5      |     |        | 1.5       |     |        |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω,<br>See Figure 3                                                                              | f = 10 Hz           | 25°C                        | 28       |     |        | 28        |     |        | nV/√Hz |
|                    |                                             |                                                                                                                     | f = 10 kHz          |                             | 11.6     |     |        | 11.6      |     |        |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                                     | f = 10 Hz to 10 kHz | 25°C                        | 6        |     |        | 6         |     |        | μV     |
|                    |                                             |                                                                                                                     | f = 0.1 Hz to 10 Hz |                             | 0.6      |     |        | 0.6       |     |        |        |
| I <sub>n</sub>     | Equivalent input noise current              | V <sub>IC</sub> = 0, f = 10 kHz                                                                                     | 25°C                | 2.8                         |          |     | 2.8    |           |     | fA/√Hz |        |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = 10,<br>f = 1 kHz, R <sub>L</sub> = 2 kΩ,<br>R <sub>S</sub> = 25 Ω      | 25°C                | 0.008%                      |          |     | 0.008% |           |     |        |        |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV, R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 25 pF, See Figure 2                              | 25°C                | 8                           | 10       |     | 8      | 10        |     | MHz    |        |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 20 V, A <sub>VD</sub> = −1,<br>R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 25 pF                   | 25°C                | 478                         | 637      |     | 478    | 637       |     | kHz    |        |
| φ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV, R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 25 pF, See Figure 2                              | 25°C                | 57°                         |          |     | 57°    |           |     |        |        |

$^\dagger$  Full range is 0°C to 70°C.



**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2084M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                              | $T_A$ †                    | TLE2084M   |           |      | TLE2084AM |           |     | UNIT             |
|---------------------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------|------------|-----------|------|-----------|-----------|-----|------------------|
|                                                                                 |                                                                              |                            | MIN        | TYP       | MAX  | MIN       | TYP       | MAX |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, V_O = 0, R_S = 50 \Omega$                                       | 25°C                       | -1.6       | 7         |      | -0.5      | 4         |     | mV               |
|                                                                                 |                                                                              | Full range                 |            |           | 12.5 |           |           | 9.5 |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                                              | Full range                 | 10.1       | 30*       |      | 10.1      | 30*       |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                   | $V_{IC} = 0, V_O = 0, \text{See Figure 4}$                                   | 25°C                       | 15         | 100       |      | 15        | 100       |     | pA               |
|                                                                                 |                                                                              | Full range                 |            |           | 20   |           |           | 20  |                  |
| $I_{IB}$ Input bias current                                                     |                                                                              | 25°C                       | 20         | 175       |      | 20        | 175       |     | pA               |
|                                                                                 |                                                                              | Full range                 |            |           | 65   |           |           | 65  | nA               |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50 \Omega$                                                            | 25°C                       | 5 to -1    | 5 to -1.9 |      | 5 to -1   | 5 to -1.9 |     | V                |
|                                                                                 |                                                                              | Full range                 | 5 to -0.8  |           |      | 5 to -0.8 |           |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -200 \mu A$                                                           | 25°C                       | 3.8        | 4.1       |      | 3.8       | 4.1       |     | V                |
|                                                                                 |                                                                              | Full range                 | 3.6        |           |      | 3.6       |           |     |                  |
|                                                                                 | $I_O = -2 \text{ mA}$                                                        | 25°C                       | 3.5        | 3.9       |      | 3.5       | 3.9       |     |                  |
|                                                                                 |                                                                              | Full range                 | 3.3        |           |      | 3.3       |           |     |                  |
|                                                                                 | $I_O = -20 \text{ mA}$                                                       | 25°C                       | 1.5        | 2.3       |      | 1.5       | 2.3       |     |                  |
|                                                                                 |                                                                              | Full range                 | 1.4        |           |      | 1.4       |           |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 200 \mu A$                                                            | 25°C                       | -3.8       | -4.2      |      | -3.8      | -4.2      |     | V                |
|                                                                                 |                                                                              | Full range                 | -3.6       |           |      | -3.6      |           |     |                  |
|                                                                                 | $I_O = 2 \text{ mA}$                                                         | 25°C                       | -3.5       | -4.1      |      | -3.5      | -4.1      |     |                  |
|                                                                                 |                                                                              | Full range                 | -3.3       |           |      | -3.3      |           |     |                  |
|                                                                                 | $I_O = 20 \text{ mA}$                                                        | 25°C                       | -1.5       | -2.4      |      | -1.5      | -2.4      |     |                  |
|                                                                                 |                                                                              | Full range                 | -1.4       |           |      | -1.4      |           |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 2.3 \text{ V}$                                                    | $R_L = 600 \Omega$         | 25°C       | 80        | 91   | 80        | 91        |     | dB               |
|                                                                                 |                                                                              |                            | Full range | 78        |      | 78        |           |     |                  |
|                                                                                 |                                                                              | $R_L = 2 \text{ k}\Omega$  | 25°C       | 90        | 100  | 90        | 100       |     |                  |
|                                                                                 |                                                                              |                            | Full range | 88        |      | 88        |           |     |                  |
|                                                                                 |                                                                              | $R_L = 10 \text{ k}\Omega$ | 25°C       | 95        | 106  | 95        | 106       |     |                  |
|                                                                                 |                                                                              |                            | Full range | 93        |      | 93        |           |     |                  |
| $r_i$ Input resistance                                                          | $V_{IC} = 0$                                                                 | 25°C                       |            | $10^{12}$ |      |           | $10^{12}$ |     | $\Omega$         |
| $c_i$ Input capacitance                                                         | $V_{IC} = 0, \text{See Figure 5}$                                            | Common mode                | 25°C       | 11        |      | 11        |           |     | pF               |
|                                                                                 |                                                                              | Differential               | 25°C       | 2.5       |      | 2.5       |           |     |                  |
| $z_o$ Open-loop output impedance                                                | $f = 1 \text{ MHz}$                                                          | 25°C                       |            | 80        |      |           | 80        |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}, V_O = 0, R_S = 50 \Omega$                              | 25°C                       | 70         | 89        |      | 70        | 89        |     | dB               |
|                                                                                 |                                                                              | Full range                 | 68         |           |      | 68        |           |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}, V_O = 0, R_S = 50 \Omega$ | 25°C                       | 82         | 99        |      | 82        | 99        |     | dB               |
|                                                                                 |                                                                              | Full range                 | 80         |           |      | 80        |           |     |                  |
| $I_{CC}$ Supply current (four amplifiers)                                       | $V_O = 0, \text{No load}$                                                    | 25°C                       | 5.2        | 6.3       | 7.5  | 5.2       | 6.3       | 7.5 | mA               |
|                                                                                 |                                                                              | Full range                 |            |           | 7.5  |           |           | 7.5 |                  |
| $a_x$ Crosstalk attenuation                                                     | $V_{IC} = 0, R_L = 2 \text{ k}\Omega$                                        | 25°C                       |            | 120       |      |           | 120       |     | dB               |

\*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is  $-55^\circ C$  to  $125^\circ C$ .

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2084M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V (unless otherwise noted) (continued)**

| PARAMETER       |                              | TEST CONDITIONS    |                        | T <sub>A</sub> | TLE2084M |     |     | TLE2084AM |     |     | UNIT |
|-----------------|------------------------------|--------------------|------------------------|----------------|----------|-----|-----|-----------|-----|-----|------|
|                 |                              |                    |                        |                | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| I <sub>OS</sub> | Short-circuit output current | V <sub>O</sub> = 0 | V <sub>ID</sub> = 1 V  | 25°C           | –35      |     |     | –35       |     |     | mA   |
|                 |                              |                    | V <sub>ID</sub> = –1 V |                | 45       |     |     | 45        |     |     |      |

**TLE2084M operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 5$  V**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                       |                                                 | T <sub>A</sub> <sup>†</sup> | TLE2084M   |     |     | TLE2084AM |     |     | UNIT   |      |
|--------------------|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-----------------------------|------------|-----|-----|-----------|-----|-----|--------|------|
|                    |                                             |                                                                                                                       |                                                 |                             | MIN        | TYP | MAX | MIN       | TYP | MAX |        |      |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = ±2.3 V,<br>A <sub>VD</sub> = −1, R <sub>L</sub> = 2 kΩ,<br>C <sub>L</sub> = 100 pF, See Figure 1 |                                                 | 25°C                        | 35         |     |     | 35        |     |     | V/μs   |      |
|                    | Full range                                  |                                                                                                                       |                                                 | 18*                         |            |     | 18* |           |     |     |        |      |
| SR −               | Negative slew rate                          |                                                                                                                       |                                                 |                             | 25°C       | 38  |     |           | 38  |     |        | V/μs |
|                    |                                             |                                                                                                                       |                                                 |                             | Full range | 18* |     |           | 18* |     |        |      |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1,<br>2-V step,<br>R <sub>L</sub> = 1 kΩ,<br>C <sub>L</sub> = 100 pF                               | To 10 mV                                        | 25°C                        | 0.25       |     |     | 0.25      |     |     | μs     |      |
|                    |                                             |                                                                                                                       | To 1 mV                                         |                             | 0.4        |     |     | 0.4       |     |     |        |      |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω,<br>See Figure 3                                                                                | f = 10 Hz                                       | 25°C                        | 28         |     |     | 28        |     |     | nV/√Hz |      |
|                    |                                             |                                                                                                                       | f = 10 kHz                                      |                             | 11.6       |     |     | 11.6      |     |     |        |      |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                                       | f = 10 Hz to 10 kHz                             | 25°C                        | 6          |     |     | 6         |     |     | μV     |      |
|                    |                                             |                                                                                                                       | f = 0.1 Hz to 10 Hz                             |                             | 0.6        |     |     | 0.6       |     |     |        |      |
| I <sub>n</sub>     | Equivalent input noise current              | V <sub>IC</sub> = 0,                                                                                                  | f = 10 kHz                                      | 25°C                        | 2.8        |     |     | 2.8       |     |     | fA/√Hz |      |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 5 V,<br>f = 1 kHz,<br>R <sub>S</sub> = 25 Ω                                                      | A <sub>VD</sub> = 10,<br>R <sub>L</sub> = 2 kΩ, | 25°C                        | 0.013%     |     |     | 0.013%    |     |     |        |      |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,                                                                    | R <sub>L</sub> = 2 kΩ,<br>See Figure 2          | 25°C                        | 9.4        |     |     | 9.4       |     |     | MHz    |      |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 4 V,<br>R <sub>L</sub> = 2 kΩ ,                                                                  | A <sub>VD</sub> = −1,<br>C <sub>L</sub> = 25 pF | 25°C                        | 2.8        |     |     | 2.8       |     |     | MHz    |      |
| ϕ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,                                                                    | R <sub>L</sub> = 2 kΩ,<br>See Figure 2          | 25°C                        | 56°        |     |     | 56°       |     |     |        |      |

\*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

$^\dagger$  Full range is  $-55^\circ\text{C}$  to  $125^\circ\text{C}$ .



**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2084M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted)**

| PARAMETER                                                                     | TEST CONDITIONS                                                              | $T_A^\dagger$              | TLE2084M    |             |      | TLE2084AM   |             |     | UNIT             |
|-------------------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------|-------------|-------------|------|-------------|-------------|-----|------------------|
|                                                                               |                                                                              |                            | MIN         | TYP         | MAX  | MIN         | TYP         | MAX |                  |
| $V_{IO}$ Input offset voltage                                                 | $V_{IC} = 0, V_O = 0, R_S = 50 \Omega$                                       | 25°C                       | -1.6        | 7           |      | -0.5        | 4           |     | mV               |
|                                                                               |                                                                              | Full range                 |             |             | 12.5 |             |             | 7.5 |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                |                                                                              | Full range                 | 10.1        | 30*         |      | 10.1        | 30*         |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                 | $V_{IC} = 0, V_O = 0, \text{See Figure 4}$                                   | 25°C                       | 15          | 100         |      | 15          | 100         |     | pA               |
|                                                                               |                                                                              | Full range                 |             |             | 20   |             |             | 20  |                  |
| $I_{IB}$ Input bias current                                                   |                                                                              | 25°C                       | 25          | 175         |      | 25          | 175         |     | pA               |
|                                                                               |                                                                              | Full range                 |             |             | 65   |             |             | 65  | nA               |
| $V_{ICR}$ Common-mode input voltage range                                     | $R_S = 50 \Omega$                                                            | 25°C                       | 15 to -11   | 15 to -11.9 |      | 15 to -11   | 15 to -11.9 |     | V                |
|                                                                               |                                                                              | Full range                 | 15 to -10.8 |             |      | 15 to -10.8 |             |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage swing                          | $I_O = -200 \mu A$                                                           | 25°C                       | 13.8        | 14.1        |      | 13.8        | 14.1        |     | V                |
|                                                                               |                                                                              | Full range                 | 13.6        |             |      | 13.6        |             |     |                  |
|                                                                               | $I_O = -2 \text{ mA}$                                                        | 25°C                       | 13.5        | 13.9        |      | 13.5        | 13.9        |     |                  |
|                                                                               |                                                                              | Full range                 | 13.3        |             |      | 13.3        |             |     |                  |
|                                                                               | $I_O = -20 \text{ mA}$                                                       | 25°C                       | 11.5        | 12.3        |      | 11.5        | 12.3        |     |                  |
|                                                                               |                                                                              | Full range                 | 11.4        |             |      | 11.4        |             |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage swing                          | $I_O = 200 \mu A$                                                            | 25°C                       | -13.8       | -14.2       |      | -13.8       | -14.2       |     | V                |
|                                                                               |                                                                              | Full range                 | -13.6       |             |      | -13.6       |             |     |                  |
|                                                                               | $I_O = 2 \text{ mA}$                                                         | 25°C                       | -13.5       | -14         |      | -13.5       | -14         |     |                  |
|                                                                               |                                                                              | Full range                 | -13.3       |             |      | -13.3       |             |     |                  |
|                                                                               | $I_O = 20 \text{ mA}$                                                        | 25°C                       | -11.5       | -12.4       |      | -11.5       | -12.4       |     |                  |
|                                                                               |                                                                              | Full range                 | -11.4       |             |      | -11.4       |             |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                      | $V_O = \pm 10 \text{ V}$                                                     | $R_L = 600 \Omega$         | 25°C        | 80          | 96   | 80          | 96          |     | dB               |
|                                                                               |                                                                              |                            | Full range  | 78          |      | 78          |             |     |                  |
|                                                                               |                                                                              | $R_L = 2 \text{ k}\Omega$  | 25°C        | 90          | 109  | 90          | 109         |     |                  |
|                                                                               |                                                                              |                            | Full range  | 88          |      | 88          |             |     |                  |
|                                                                               |                                                                              | $R_L = 10 \text{ k}\Omega$ | 25°C        | 95          | 118  | 95          | 118         |     |                  |
|                                                                               |                                                                              |                            | Full range  | 93          |      | 93          |             |     |                  |
| $r_i$ Input resistance                                                        | $V_{IC} = 0$                                                                 | 25°C                       |             | $10^{12}$   |      |             | $10^{12}$   |     | $\Omega$         |
| $c_i$ Input capacitance                                                       | $V_{IC} = 0, \text{See Figure 5}$                                            | Common mode                | 25°C        | 7.5         |      | 7.5         |             |     | pF               |
|                                                                               |                                                                              | Differential               | 25°C        | 2.5         |      | 2.5         |             |     |                  |
| $z_o$ Open-loop output impedance                                              | $f = 1 \text{ MHz}$                                                          | 25°C                       |             | 80          |      |             | 80          |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                              | $V_{IC} = V_{ICRmin}, V_O = 0, R_S = 50 \Omega$                              | 25°C                       | 80          | 98          |      | 80          | 98          |     | dB               |
|                                                                               |                                                                              | Full range                 | 78          |             |      | 78          |             |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm}/\Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5 \text{ V to } \pm 15 \text{ V}, V_O = 0, R_S = 50 \Omega$ | 25°C                       | 82          | 99          |      | 82          | 99          |     | dB               |
|                                                                               |                                                                              | Full range                 | 80          |             |      | 80          |             |     |                  |
| $I_{CC}$ Supply current (four amplifiers)                                     | $V_O = 0, \text{No load}$                                                    | 25°C                       | 5.2         | 6.5         | 7.5  | 5.2         | 6.5         | 7.5 | mA               |
|                                                                               |                                                                              | Full range                 |             |             | 7.5  |             |             | 7.5 |                  |
| $a_x$ Crosstalk attenuation                                                   | $V_{IC} = 0, R_L = 2 \text{ k}\Omega$                                        | 25°C                       |             | 120         |      |             | 120         |     | dB               |

\*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

$^\dagger$  Full range is  $-55^\circ C$  to  $125^\circ C$ .

# TLE208x, TLE208xA, TLE208xY

## EXCALIBUR HIGH-SPEED JFET-INPUT

### OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**TLE2084M electrical characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V (unless otherwise noted) (continued)**

| PARAMETER       |                              | TEST CONDITIONS    |                        | T <sub>A</sub> | TLE2084M |     |     | TLE2084AM |     |     | UNIT |
|-----------------|------------------------------|--------------------|------------------------|----------------|----------|-----|-----|-----------|-----|-----|------|
|                 |                              |                    |                        |                | MIN      | TYP | MAX | MIN       | TYP | MAX |      |
| I <sub>OS</sub> | Short-circuit output current | V <sub>O</sub> = 0 | V <sub>ID</sub> = 1 V  | 25°C           | -30      | -45 |     | -30       | -45 |     | mA   |
|                 |                              |                    | V <sub>ID</sub> = -1 V |                | 30       | 48  |     | 30        | 48  |     |      |

**TLE2084M operating characteristics at specified free-air temperature,  $V_{CC\pm} = \pm 15$  V**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                             |                                                 | T <sub>A</sub> <sup>†</sup> | TLE2084M |     |     | TLE2084AM |     |     | UNIT   |      |
|--------------------|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-----------------------------|----------|-----|-----|-----------|-----|-----|--------|------|
|                    |                                             |                                                                                                                             |                                                 |                             | MIN      | TYP | MAX | MIN       | TYP | MAX |        |      |
| SR +               | Positive slew rate                          | V <sub>O(PP)</sub> = 10 V,<br>A <sub>VD</sub> = −1,<br>C <sub>L</sub> = 100 pF,      R <sub>L</sub> = 2 kΩ,<br>See Figure 1 |                                                 | 25°C                        | 25       | 40  |     | 25        | 40  |     | V/μs   |      |
|                    |                                             |                                                                                                                             |                                                 | Full range                  | 17       |     |     | 17        |     |     |        |      |
| SR −               | Negative slew rate                          |                                                                                                                             |                                                 | 25°C                        | 30       | 45  |     | 30        | 45  |     |        | V/μs |
|                    |                                             |                                                                                                                             |                                                 | Full range                  | 20       |     |     | 20        |     |     |        |      |
| t <sub>s</sub>     | Settling time                               | A <sub>VD</sub> = −1,<br>10-V step,<br>R <sub>L</sub> = 1 kΩ,<br>C <sub>L</sub> = 100 pF                                    | To 10 mV                                        | 25°C                        | 0.4      |     |     | 0.4       |     |     | μs     |      |
|                    |                                             |                                                                                                                             | To 1 mV                                         |                             | 1.5      |     |     | 1.5       |     |     |        |      |
| V <sub>n</sub>     | Equivalent input noise voltage              | R <sub>S</sub> = 20 Ω,<br>See Figure 3                                                                                      | f = 10 Hz                                       | 25°C                        | 28       |     |     | 28        |     |     | nV/√Hz |      |
|                    |                                             |                                                                                                                             | f = 10 kHz                                      |                             | 11.6     |     |     | 11.6      |     |     |        |      |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage |                                                                                                                             | f = 10 Hz to 10 kHz                             | 25°C                        | 6        |     |     | 6         |     |     | μV     |      |
|                    |                                             |                                                                                                                             | f = 0.1 Hz to 10 Hz                             |                             | 0.6      |     |     | 0.6       |     |     |        |      |
| I <sub>n</sub>     | Equivalent input noise current              | V <sub>IC</sub> = 0,                                                                                                        | f = 10 kHz                                      | 25°C                        | 2.8      |     |     | 2.8       |     |     | fA/√Hz |      |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O(PP)</sub> = 20 V,<br>f = 1 kHz,<br>R <sub>S</sub> = 25 Ω                                                           | A <sub>VD</sub> = 10,<br>R <sub>L</sub> = 2 kΩ, | 25°C                        | 0.008%   |     |     | 0.008%    |     |     |        |      |
| B <sub>1</sub>     | Unity-gain bandwidth                        | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,                                                                          | R <sub>L</sub> = 2 kΩ,<br>See Figure 2          | 25°C                        | 8*       | 10  |     | 8*        | 10  |     | MHz    |      |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 20 V,<br>R <sub>L</sub> = 2 kΩ,                                                                        | A <sub>VD</sub> = −1,<br>C <sub>L</sub> = 25 pF | 25°C                        | 478*     | 637 |     | 478*      | 637 |     | kHz    |      |
| φ <sub>m</sub>     | Phase margin at unity gain                  | V <sub>I</sub> = 10 mV,<br>C <sub>L</sub> = 25 pF,                                                                          | R <sub>L</sub> = 2 kΩ,<br>See Figure 2          | 25°C                        | 57°      |     |     | 57°       |     |     |        |      |

\*On products compliant to MIL-PRF-38535, Class B, this parameter is not production tested.

† Full range is -55°C to 125°C.

**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000


**TLE2084Y electrical characteristics at  $V_{CC\pm} = \pm 15$  V,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)**

| PARAMETER                                                                       | TEST CONDITIONS                                                                         | TLE2084Y                   |                  |     | UNIT     |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------------------------|------------------|-----|----------|
|                                                                                 |                                                                                         | MIN                        | TYP              | MAX |          |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0$ ,<br>$R_S = 50\ \Omega$<br>$V_O = 0$                                       |                            |                  | 7   | mV       |
| $I_{IO}$ Input offset current                                                   | $V_{IC} = 0$ ,<br>$V_O = 0$                                                             |                            | 15               | 100 | pA       |
| $I_{IB}$ Input bias current                                                     | See Figure 4                                                                            |                            | 25               | 175 | pA       |
| $V_{ICR}$ Common-mode input voltage range                                       | $R_S = 50\ \Omega$                                                                      | 15<br>to<br>–11            | 15<br>to<br>11.9 |     | V        |
| $V_{OM+}$ Maximum positive peak output voltage swing                            | $I_O = -200\ \mu\text{A}$                                                               | 13.8                       | 14.1             |     | V        |
|                                                                                 | $I_O = -2\ \text{mA}$                                                                   | 13.5                       | 13.9             |     |          |
|                                                                                 | $I_O = -20\ \text{mA}$                                                                  | 11.5                       | 12.3             |     |          |
| $V_{OM-}$ Maximum negative peak output voltage swing                            | $I_O = 200\ \mu\text{A}$                                                                | –13.8                      | –14.2            |     | V        |
|                                                                                 | $I_O = 2\ \text{mA}$                                                                    | –13.5                      | –14              |     |          |
|                                                                                 | $I_O = 20\ \text{mA}$                                                                   | –11.5                      | –12.4            |     |          |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 10\ \text{V}$                                                                | $R_L = 600\ \Omega$        | 80               | 96  | dB       |
|                                                                                 |                                                                                         | $R_L = 2\ \text{k}\Omega$  | 90               | 109 |          |
|                                                                                 |                                                                                         | $R_L = 10\ \text{k}\Omega$ | 95               | 118 |          |
| $r_i$ Input resistance                                                          | $V_{IC} = 0$                                                                            |                            | 10 <sup>12</sup> |     | $\Omega$ |
| $c_i$ Input capacitance                                                         | $V_{IC} = 0$ ,<br>See Figure 5                                                          | Common mode                |                  | 7.5 | pF       |
|                                                                                 |                                                                                         | Differential               |                  | 2.5 |          |
| $z_o$ Open-loop output impedance                                                | $f = 1\ \text{MHz}$                                                                     |                            | 80               |     | $\Omega$ |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = V_{ICRmin}$ ,<br>$R_S = 50\ \Omega$<br>$V_O = 0$                              | 80                         | 98               |     | dB       |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC\pm} / \Delta V_{IO}$ ) | $V_{CC\pm} = \pm 5\ \text{V}$ to $\pm 15\ \text{V}$ , $V_O = 0$ ,<br>$R_S = 50\ \Omega$ | 82                         | 99               |     | dB       |
| $I_{CC}$ Supply current (four amplifiers)                                       | $V_O = 0$ , No load                                                                     | 5.2                        | 6.5              | 7.5 | mA       |
| $I_{OS}$ Short-circuit output current                                           | $V_O = 0$                                                                               | $V_{ID} = 1\ \text{V}$     | –30              | –45 | mA       |
|                                                                                 |                                                                                         | $V_{ID} = -1\ \text{V}$    | 30               | 48  |          |

# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS


SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## PARAMETER MEASUREMENT INFORMATION

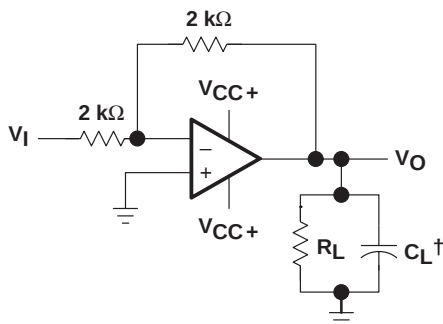


† Includes fixture capacitance

**Figure 1. Slew-Rate Test Circuit**

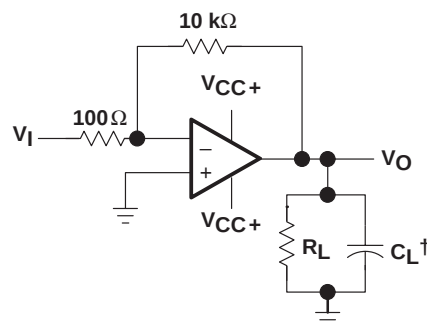


† Includes fixture capacitance

**Figure 2. Unity-Gain Bandwidth and Phase-Margin Test Circuit**

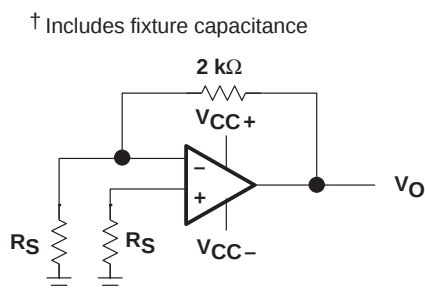


† Includes fixture capacitance

**Figure 3. Noise-Voltage Test Circuit**

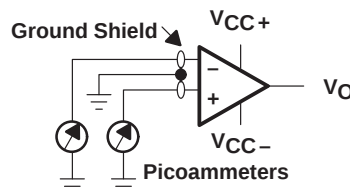

**Figure 4. Input-Bias and Offset-Current Test Circuit**

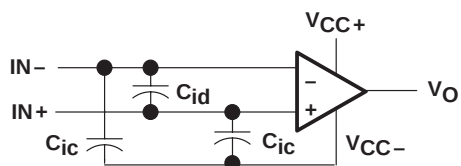

**Figure 5. Internal Input Capacitance**

## typical values

Typical values presented in this data sheet represent the median (50% point) of device parametric performance.

## input bias and offset current

At the picoampere bias-current level typical of the TLE208x and TLE208xA, accurate measurement of the bias becomes difficult. Not only does this measurement require a picoammeter, but test socket leakages can easily exceed the actual device bias currents. To accurately measure these small currents, Texas Instruments uses a two-step process. The socket leakage is measured using picoammeters with bias voltages applied but with no device in the socket. The device is then inserted in the socket and a second test is performed that measures both the socket leakage and the device input bias current. The two measurements are then subtracted algebraically to determine the bias current of the device.

## TYPICAL CHARACTERISTICS

**Table of Graphs**

|                |                                                 |                                                                                | FIGURE                              |
|----------------|-------------------------------------------------|--------------------------------------------------------------------------------|-------------------------------------|
| $V_{IO}$       | Input offset voltage                            | Distribution                                                                   | 6, 7, 8                             |
| $\alpha_{VIO}$ | Input offset voltage temperature coefficient    | Distribution                                                                   | 9, 10, 11                           |
| $I_{IO}$       | Input offset current                            | vs Free-air temperature                                                        | 12 – 15                             |
| $I_{IB}$       | Input bias current                              | vs Free-air temperature<br>vs Supply voltage                                   | 12 – 15<br>16                       |
| $V_{ICR}$      | Common-mode input voltage range                 | vs Free-air temperature                                                        | 17                                  |
| $V_{ID}$       | Differential input voltage                      | vs Output voltage                                                              | 18, 19                              |
| $V_{OM+}$      | Maximum positive peak output voltage            | vs Output current<br>vs Free-air temperature<br>vs Supply voltage              | 20, 21<br>24, 25<br>26              |
| $V_{OM-}$      | Maximum negative peak output voltage            | vs Output current<br>vs Free-air temperature<br>vs Supply voltage              | 22, 23<br>24, 25<br>26              |
| $V_{O(PP)}$    | Maximum peak-to-peak output voltage             | vs Frequency                                                                   | 27                                  |
| $V_O$          | Output voltage                                  | vs Settling time                                                               | 28                                  |
| $A_{VD}$       | Large-signal differential voltage amplification | vs Load resistance<br>vs Free-air temperature                                  | 29<br>30, 31                        |
| $A_{VD}$       | Small-signal differential voltage amplification | vs Frequency                                                                   | 32, 33                              |
| $CMRR$         | Common-mode rejection ratio                     | vs Frequency<br>vs Free-air temperature                                        | 34<br>35                            |
| $k_{SVR}$      | Supply-voltage rejection ratio                  | vs Frequency<br>vs Free-air temperature                                        | 36<br>37                            |
| $I_{CC}$       | Supply current                                  | vs Supply voltage<br>vs Free-air temperature<br>vs Differential input voltage  | 38, 39, 40<br>41, 42, 43<br>44 – 49 |
| $I_{OS}$       | Short-circuit output current                    | vs Supply voltage<br>vs Elapsed time<br>vs Free-air temperature                | 50<br>51<br>52                      |
| $SR$           | Slew rate                                       | vs Free-air temperature<br>vs Load resistance<br>vs Differential input voltage | 53, 54<br>55<br>56                  |
| $V_n$          | Equivalent input noise voltage                  | vs Frequency                                                                   | 57                                  |
| $V_n$          | Input-referred noise voltage                    | vs Noise bandwidth frequency<br>Over a 10-second time interval                 | 58<br>59                            |
|                | Third-octave spectral noise density             | vs Frequency bands                                                             | 60                                  |
| $THD + N$      | Total harmonic distortion plus noise            | vs Frequency                                                                   | 61, 62                              |
| $B_1$          | Unity-gain bandwidth                            | vs Load capacitance                                                            | 63                                  |
|                | Gain-bandwidth product                          | vs Free-air temperature<br>vs Supply voltage                                   | 64<br>65                            |
|                | Gain margin                                     | vs Load capacitance                                                            | 66                                  |
| $\phi_m$       | Phase margin                                    | vs Free-air temperature<br>vs Supply voltage<br>vs Load capacitance            | 67<br>68<br>69                      |
|                | Phase shift                                     | vs Frequency                                                                   | 32, 33                              |

# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## TYPICAL CHARACTERISTICS

Table of Graphs (Continued)

|                                          |                              | FIGURE |
|------------------------------------------|------------------------------|--------|
| Noninverting large-signal pulse response | vs Time                      | 70     |
| Small-signal pulse response              | vs Time                      | 71     |
| $z_o$                                    | Closed-loop output impedance | 72     |
| $a_x$                                    | Crosstalk attenuation        | 73     |

DISTRIBUTION OF TLE2081  
INPUT OFFSET VOLTAGE

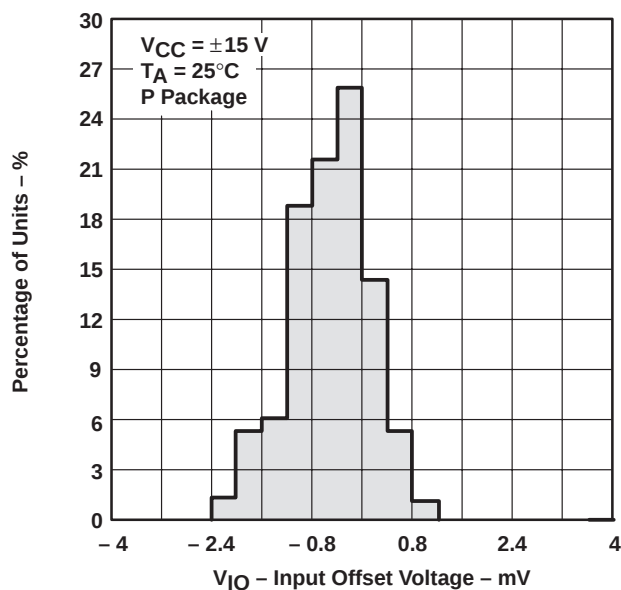


Figure 6

DISTRIBUTION OF TLE2082  
INPUT OFFSET VOLTAGE

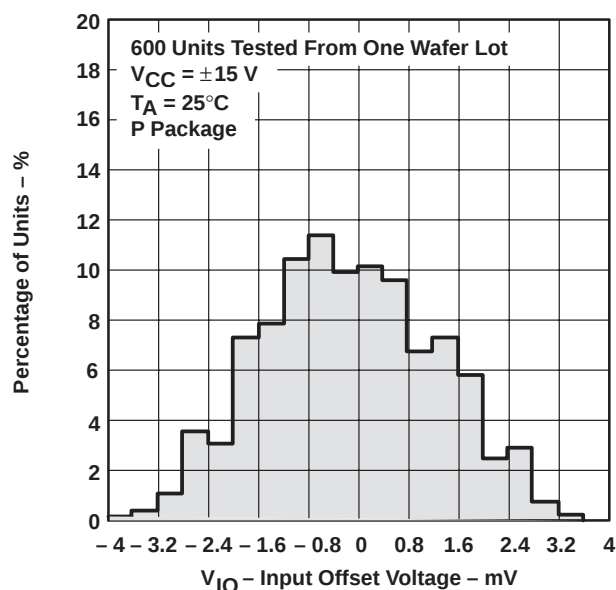


Figure 7

## TYPICAL CHARACTERISTICS

DISTRIBUTION OF TLE2084  
INPUT OFFSET VOLTAGE

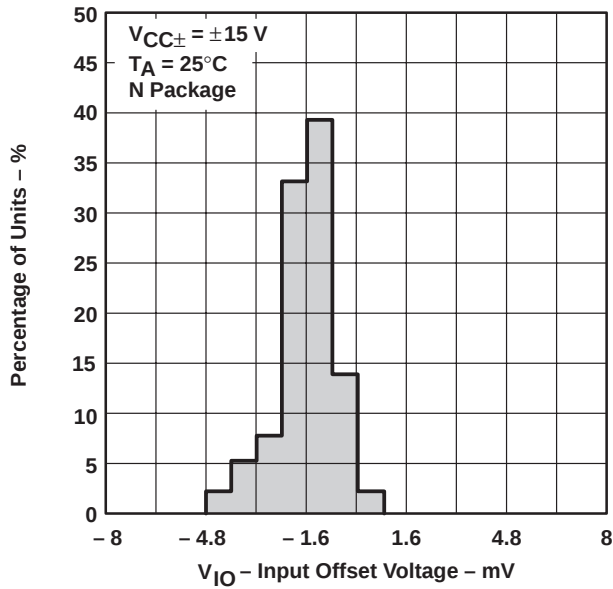


Figure 8

DISTRIBUTION OF TLE2081 INPUT OFFSET  
VOLTAGE TEMPERATURE COEFFICIENT

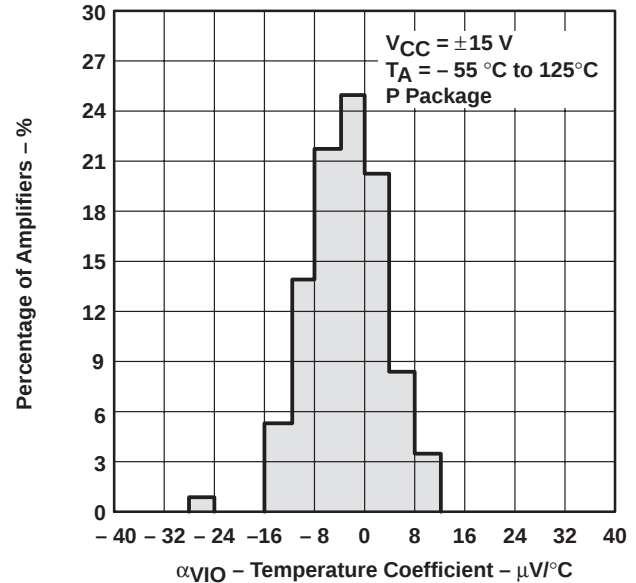


Figure 9

DISTRIBUTION OF TLE2082 INPUT OFFSET  
VOLTAGE TEMPERATURE COEFFICIENT

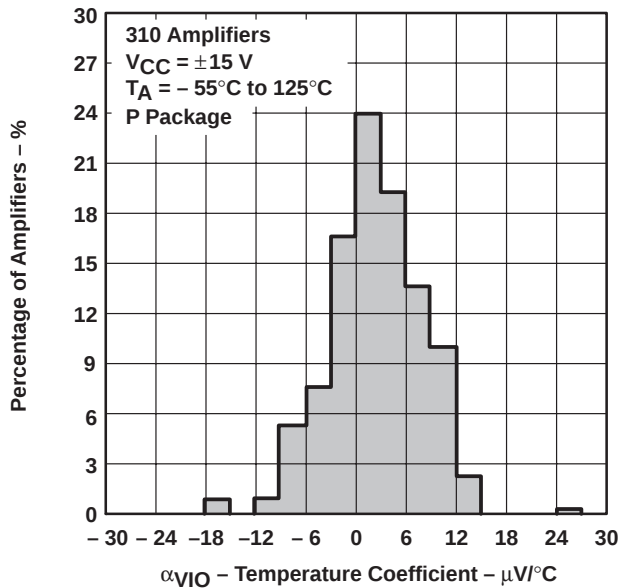


Figure 10

DISTRIBUTION OF TLE2084 INPUT OFFSET  
VOLTAGE TEMPERATURE COEFFICIENT

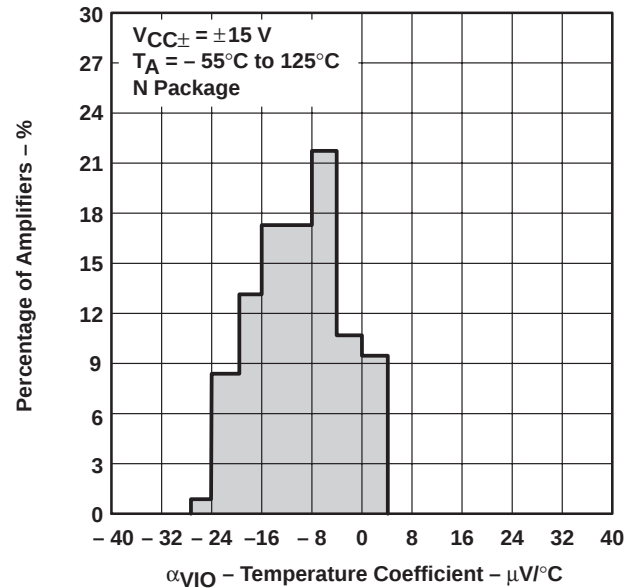


Figure 11

# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## TYPICAL CHARACTERISTICS†

**TLE2081 AND TLE2082**  
INPUT BIAS CURRENT AND INPUT OFFSET CURRENT  
VS  
FREE-AIR TEMPERATURE

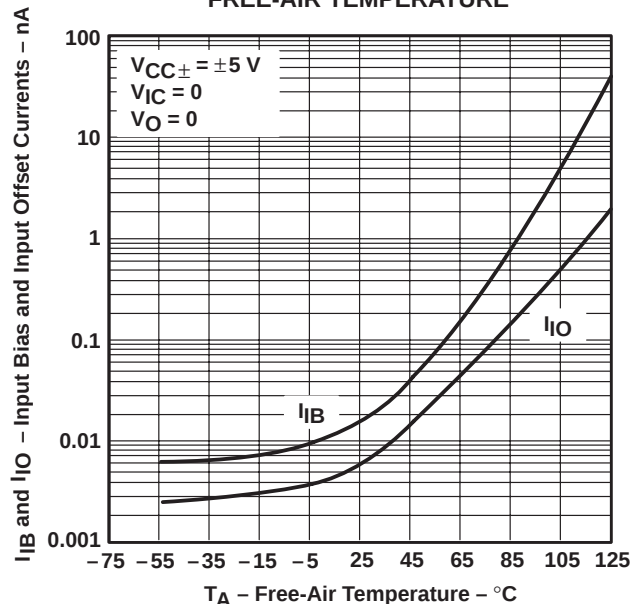


Figure 12

**TLE2084**  
INPUT BIAS CURRENT AND INPUT OFFSET CURRENT  
VS  
FREE-AIR TEMPERATURE

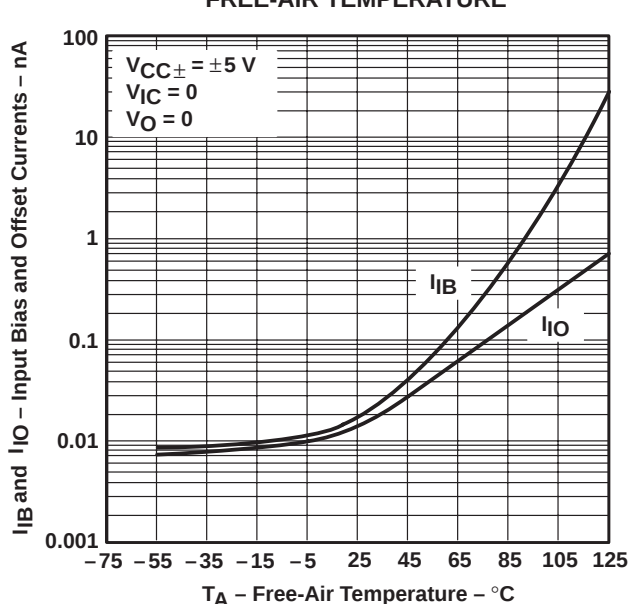


Figure 13

**TLE2081 AND TLE2082**  
INPUT BIAS CURRENT AND INPUT OFFSET CURRENT  
VS  
FREE-AIR TEMPERATURE

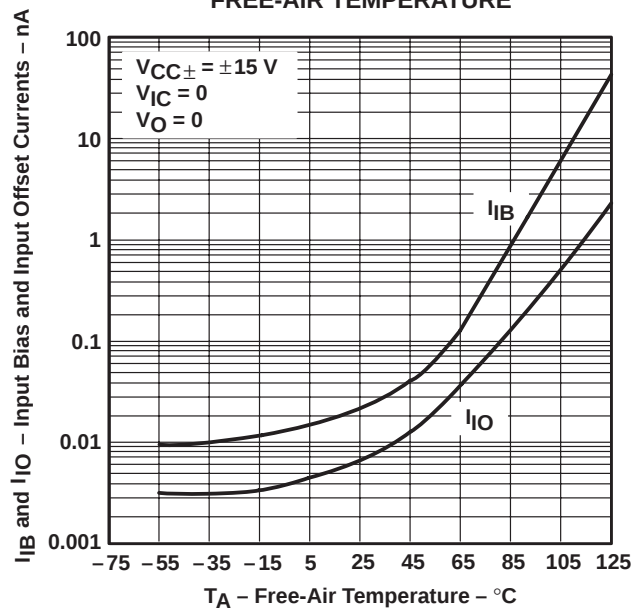


Figure 14

**TLE2084**  
INPUT BIAS CURRENT AND INPUT OFFSET CURRENT  
VS  
FREE-AIR TEMPERATURE





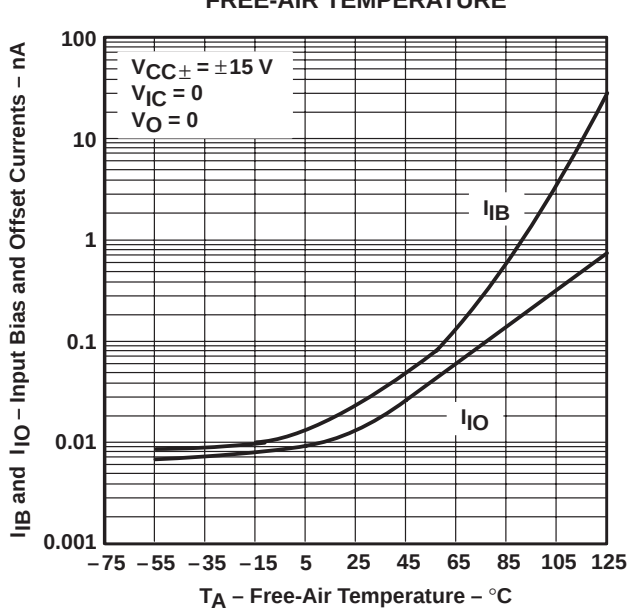


Figure 15

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TYPICAL CHARACTERISTICS†

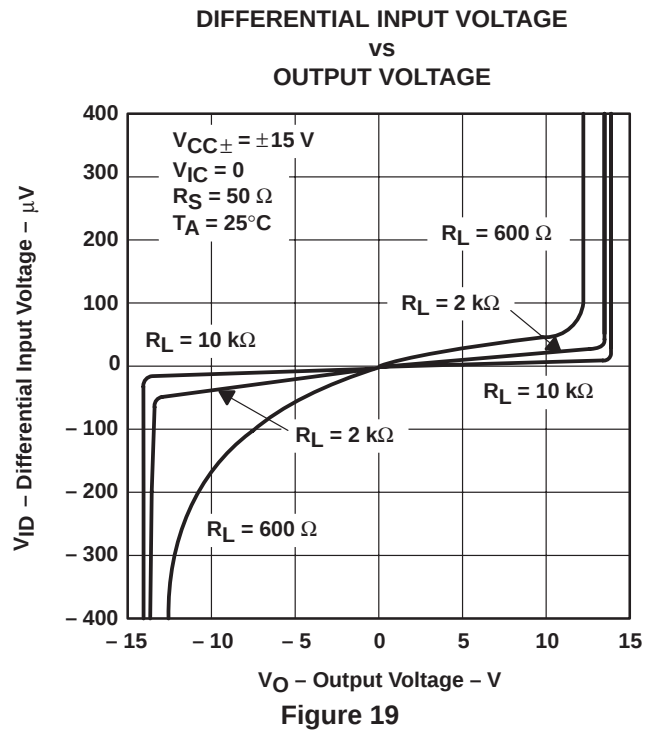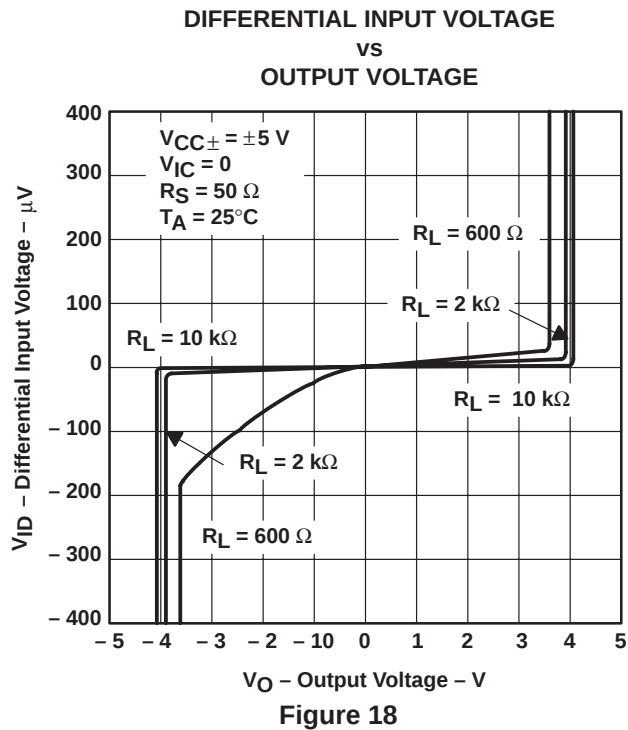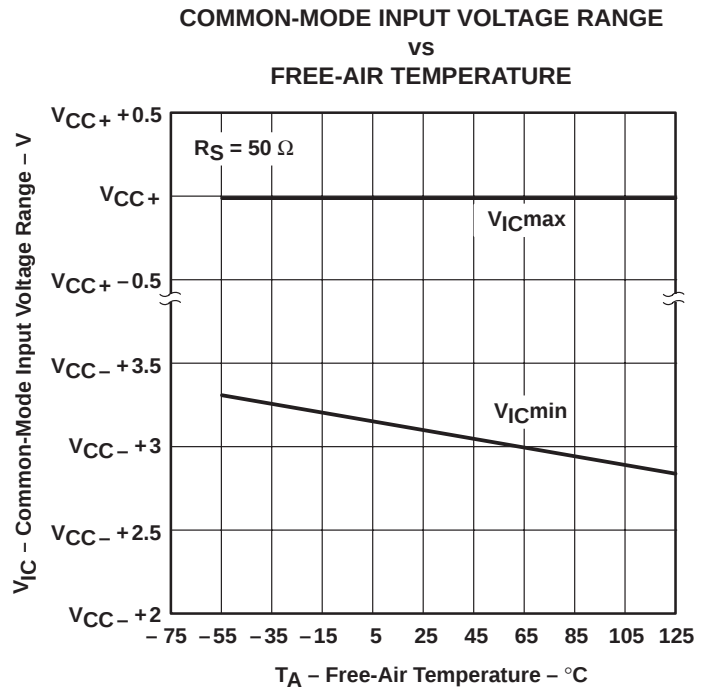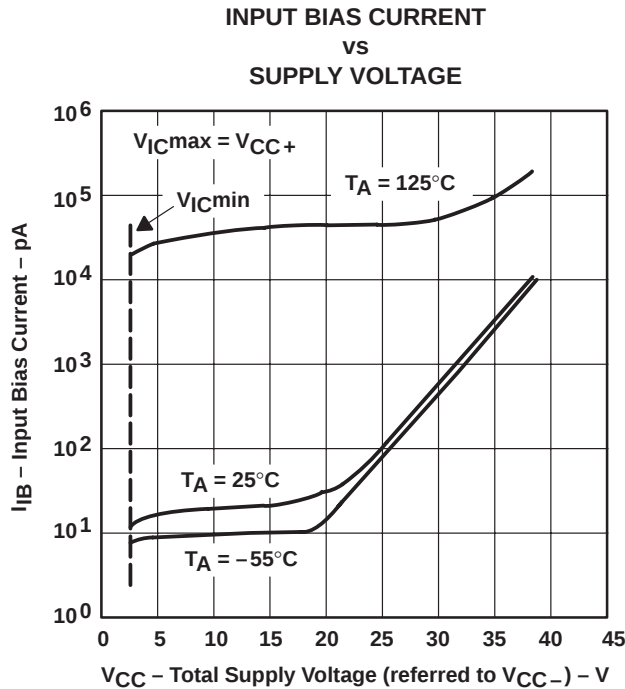

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## TYPICAL CHARACTERISTICS†

**TLE2081 AND TLE2082**  
MAXIMUM POSITIVE PEAK OUTPUT VOLTAGE  
VS  
OUTPUT CURRENT

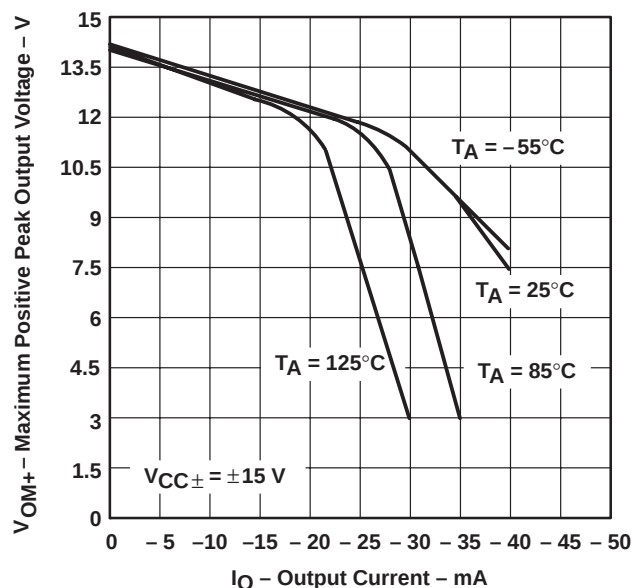


Figure 20

**TLE2084**  
MAXIMUM POSITIVE PEAK OUTPUT VOLTAGE  
VS  
OUTPUT CURRENT

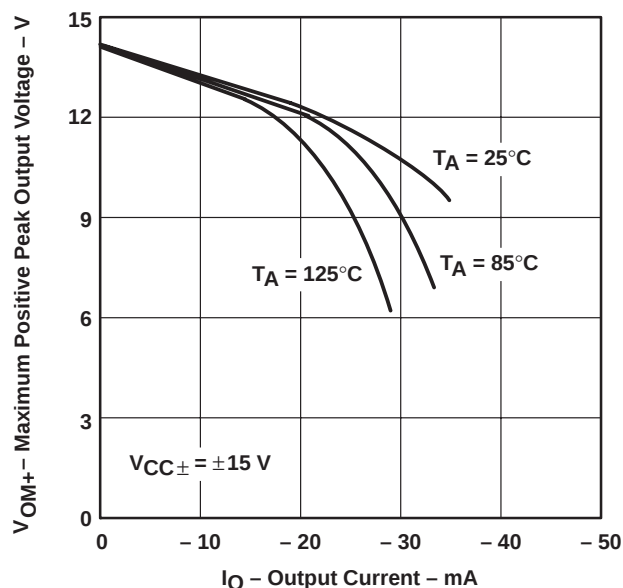


Figure 21

**TLE2081 AND TLE2082**  
MAXIMUM NEGATIVE PEAK OUTPUT VOLTAGE  
VS  
OUTPUT CURRENT

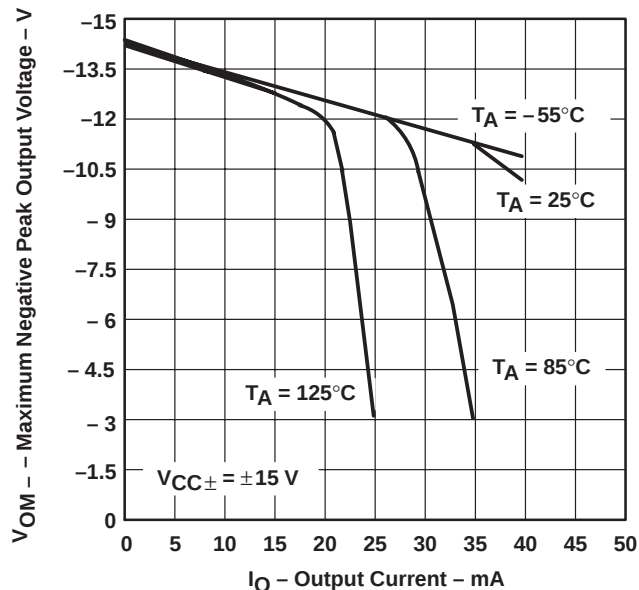


Figure 22

**TLE2084**  
MAXIMUM NEGATIVE PEAK OUTPUT VOLTAGE  
VS  
OUTPUT CURRENT

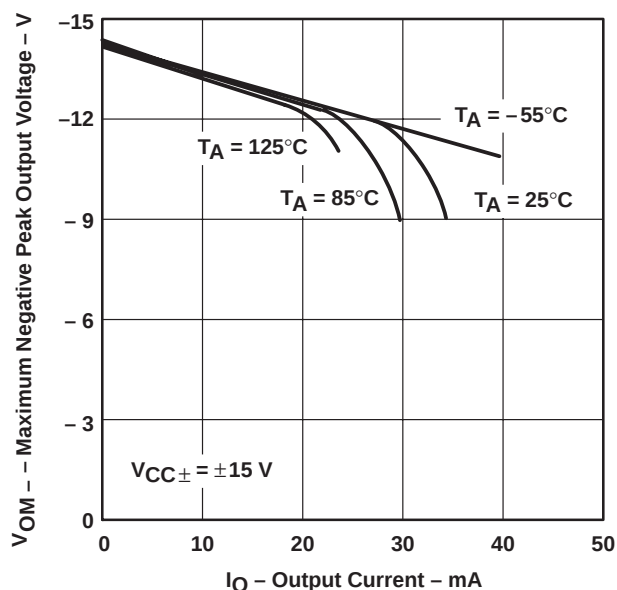


Figure 23

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TYPICAL CHARACTERISTICS†

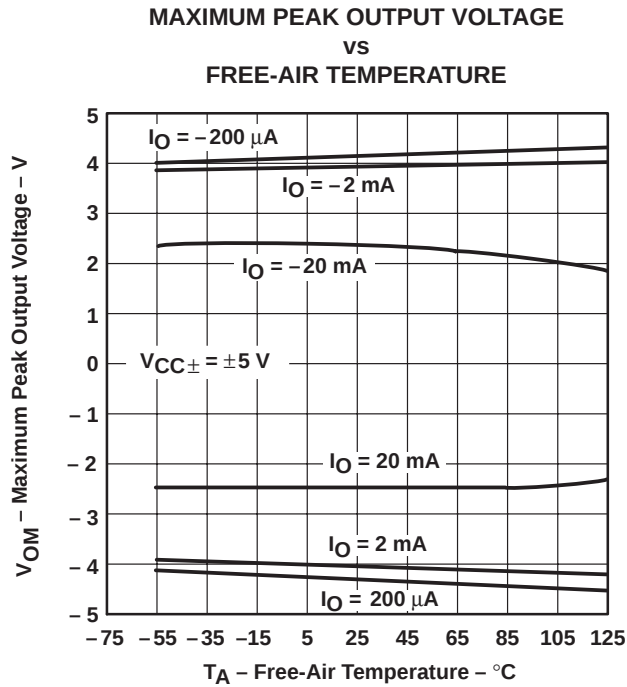


Figure 24

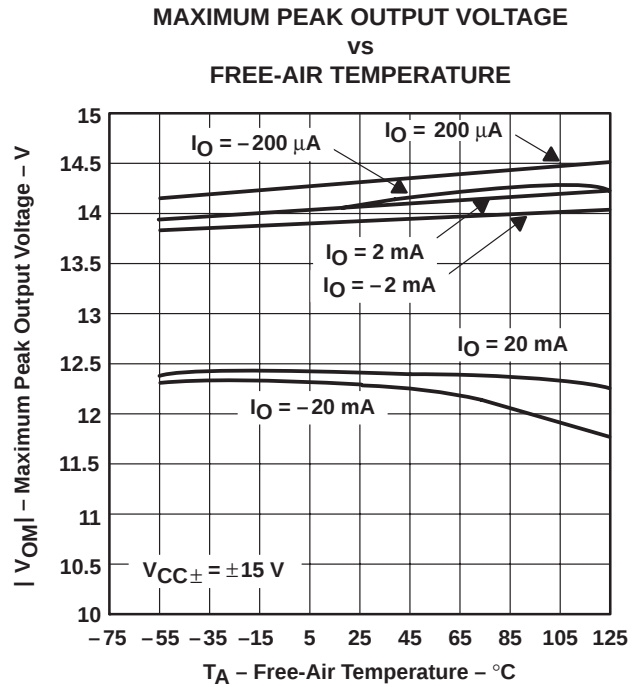


Figure 25

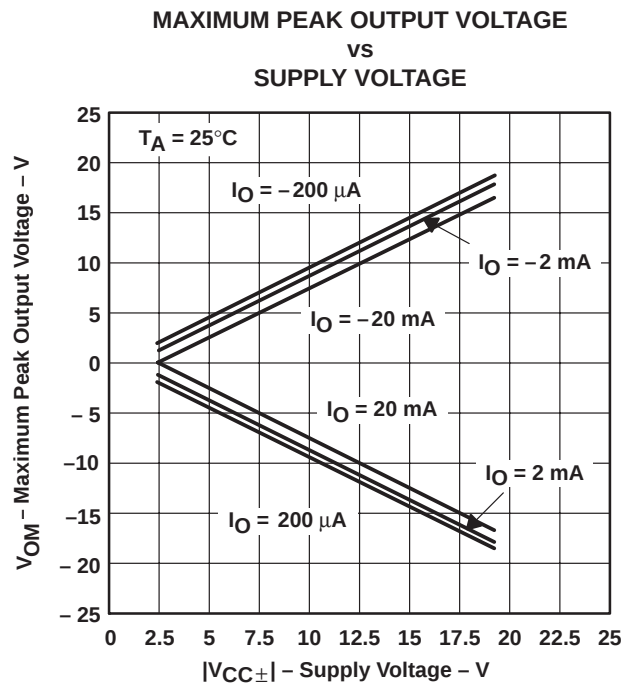


Figure 26

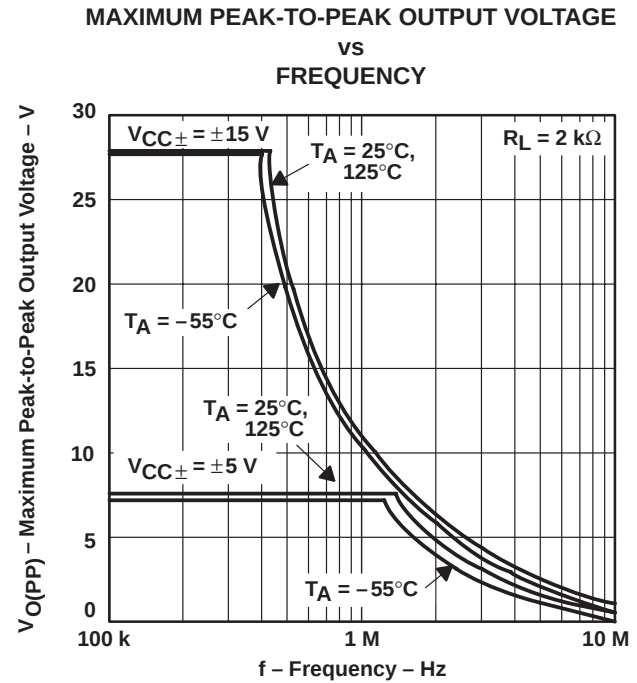


Figure 27

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## TYPICAL CHARACTERISTICS†

OUTPUT VOLTAGE  
VS  
SETTLING TIME

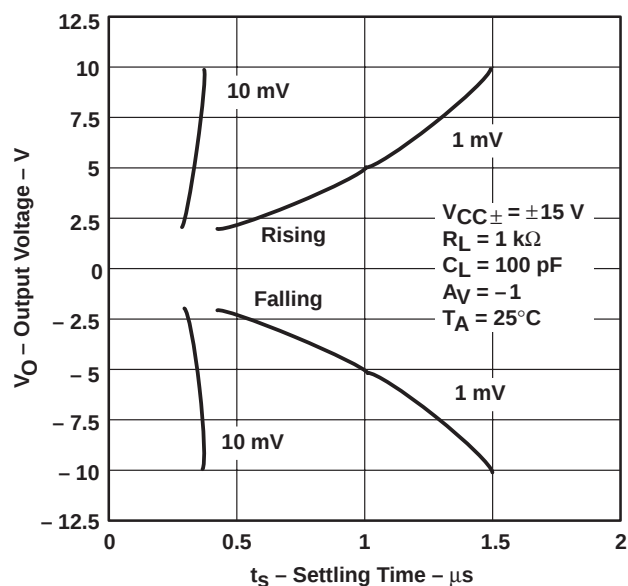


Figure 28

LARGE-SIGNAL DIFFERENTIAL  
VOLTAGE AMPLIFICATION  
VS  
LOAD RESISTANCE

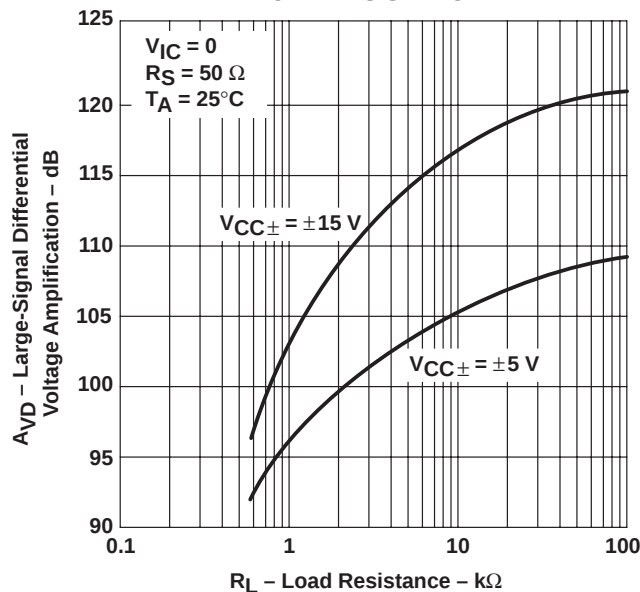


Figure 29

LARGE-SIGNAL DIFFERENTIAL  
VOLTAGE AMPLIFICATION  
VS  
FREE-AIR TEMPERATURE

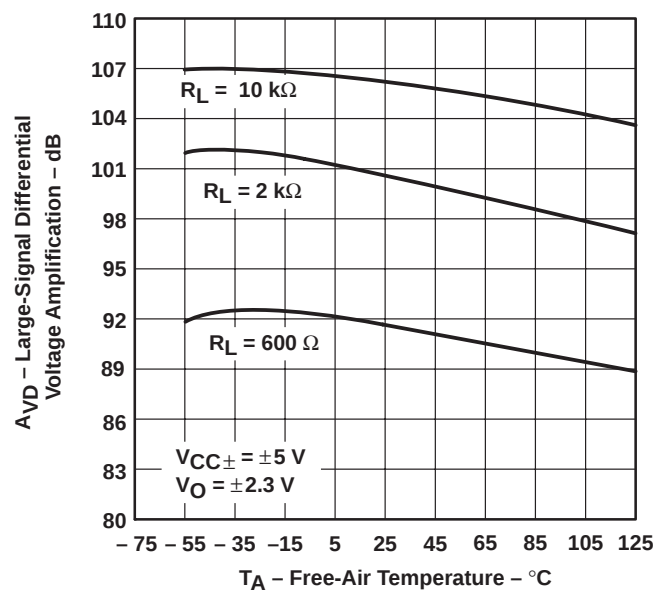


Figure 30

LARGE-SIGNAL DIFFERENTIAL  
VOLTAGE AMPLIFICATION  
VS  
FREE-AIR TEMPERATURE

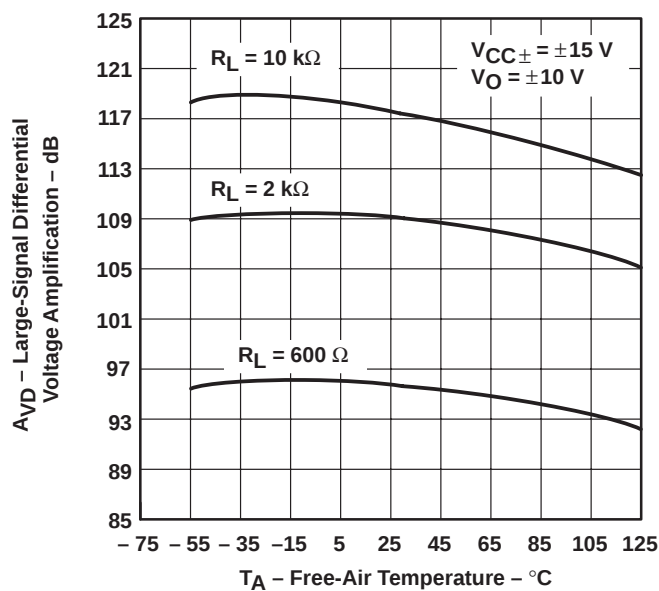


Figure 31

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## TYPICAL CHARACTERISTICS

### SMALL-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT

vs  
FREQUENCY

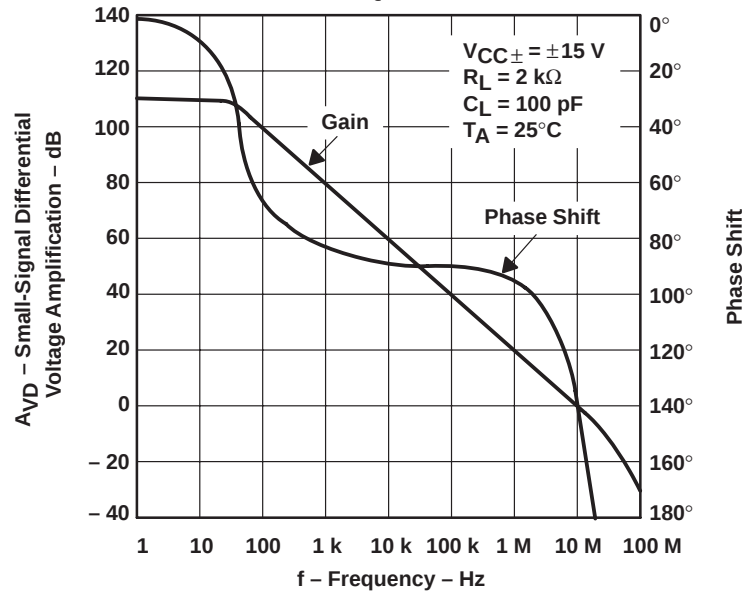


Figure 32

### SMALL-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT

vs  
FREQUENCY

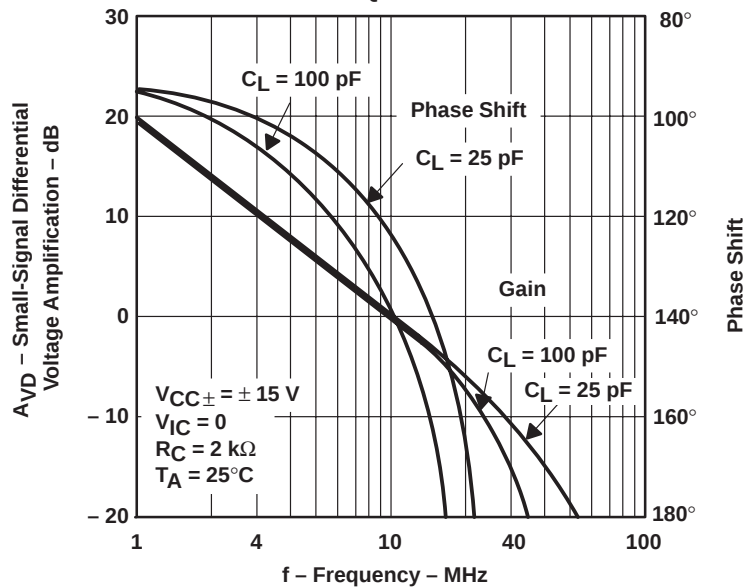


Figure 33

# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## TYPICAL CHARACTERISTICS†

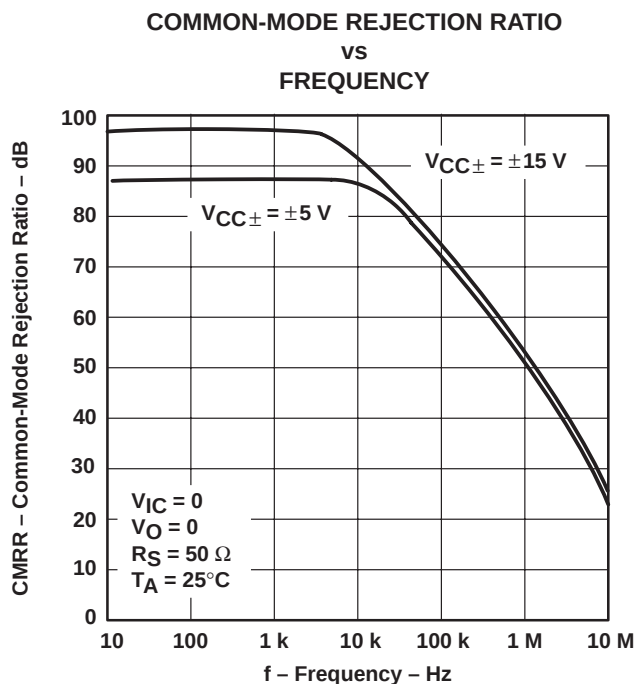


Figure 34

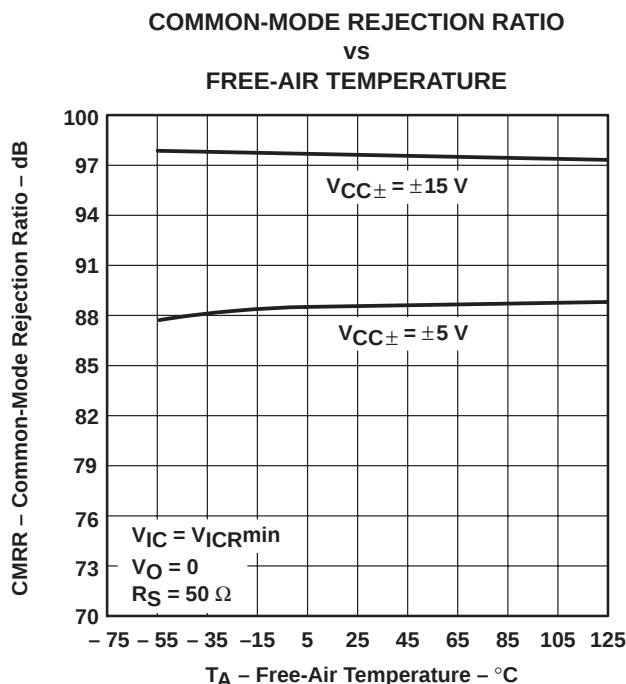


Figure 35

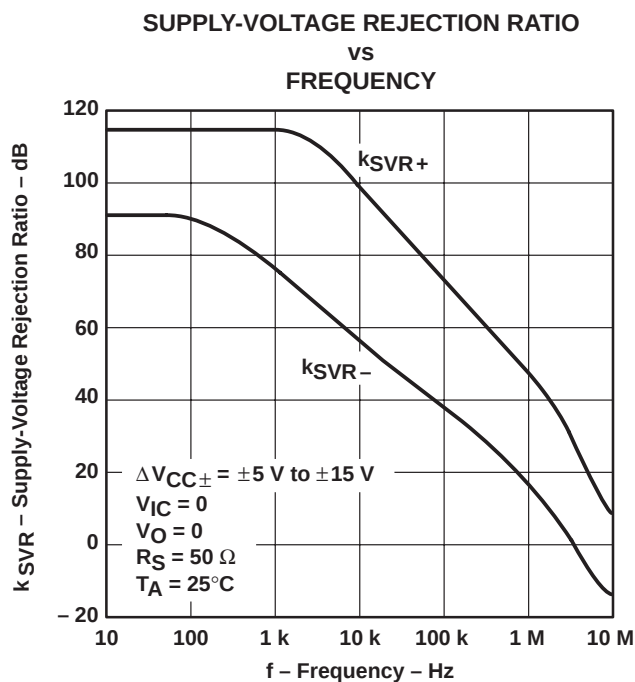


Figure 36

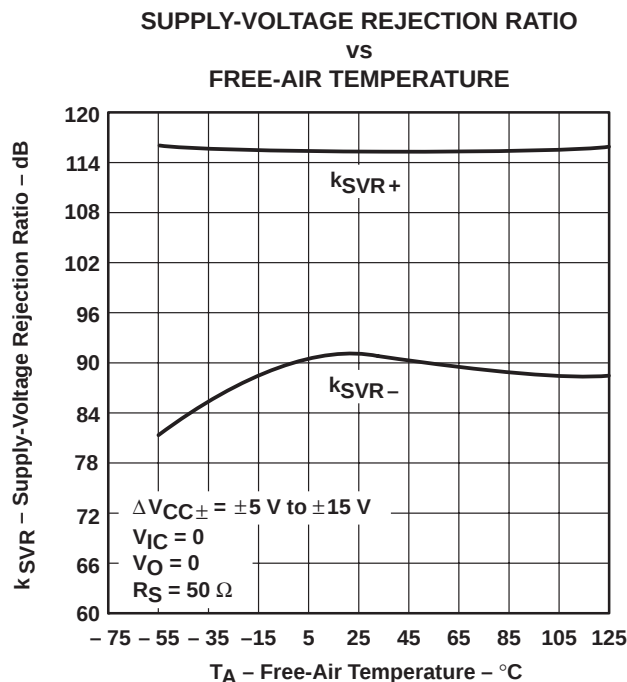


Figure 37

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS†

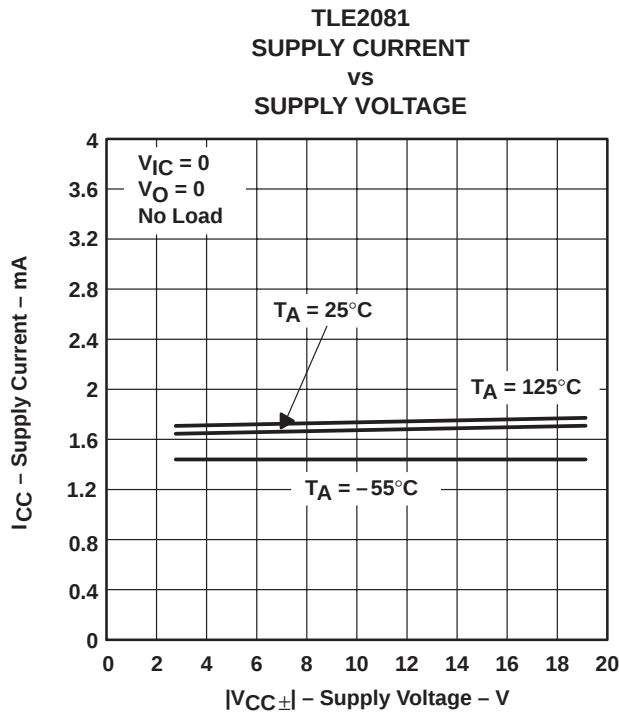


Figure 38

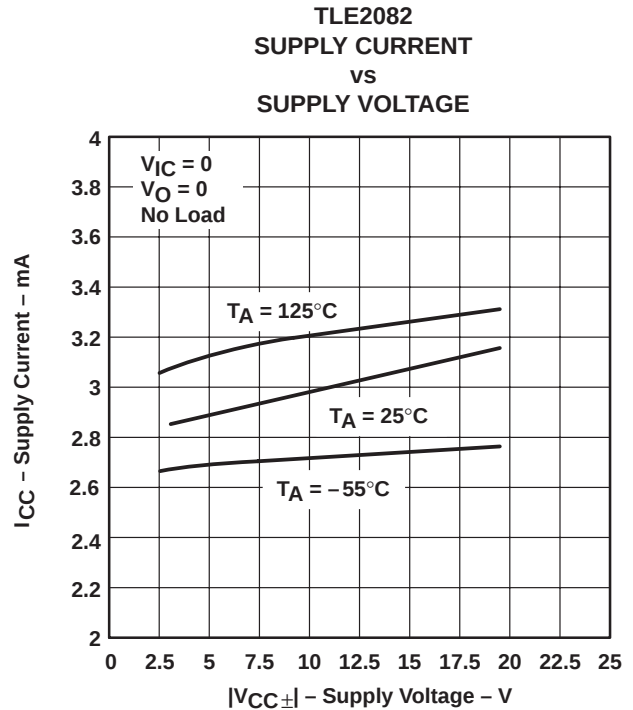


Figure 39

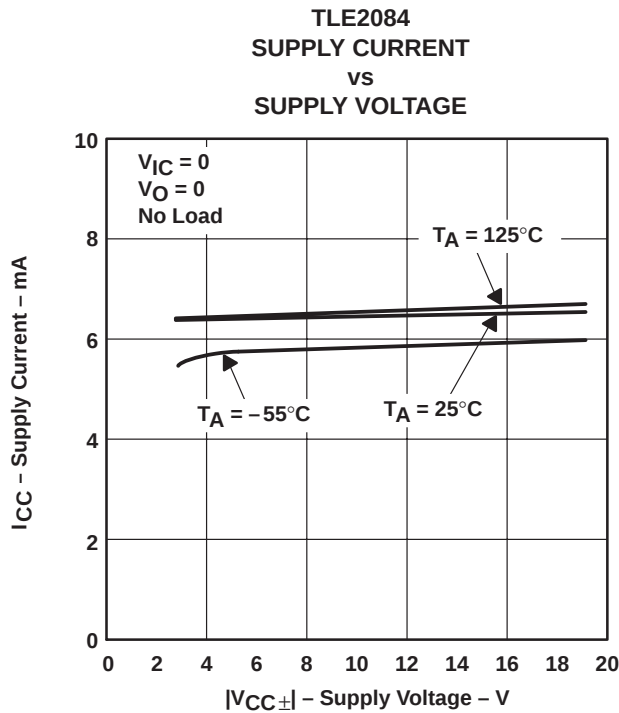


Figure 40

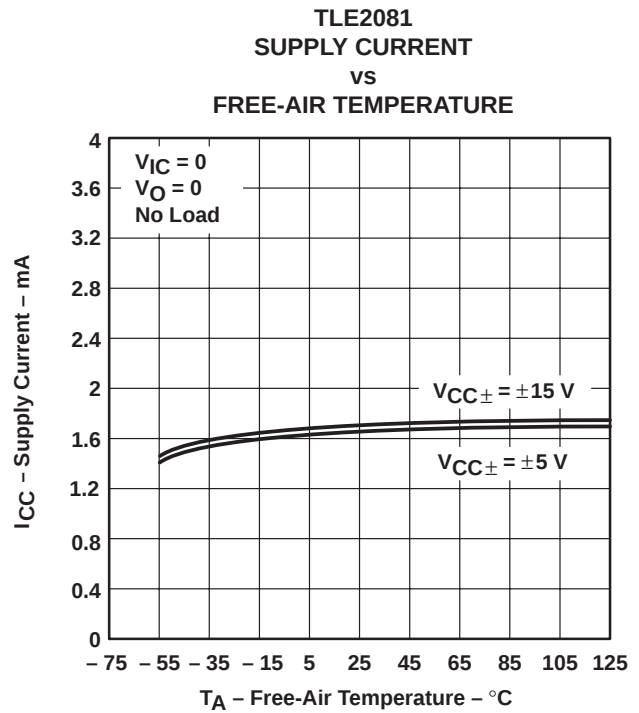


Figure 41

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## TYPICAL CHARACTERISTICS†

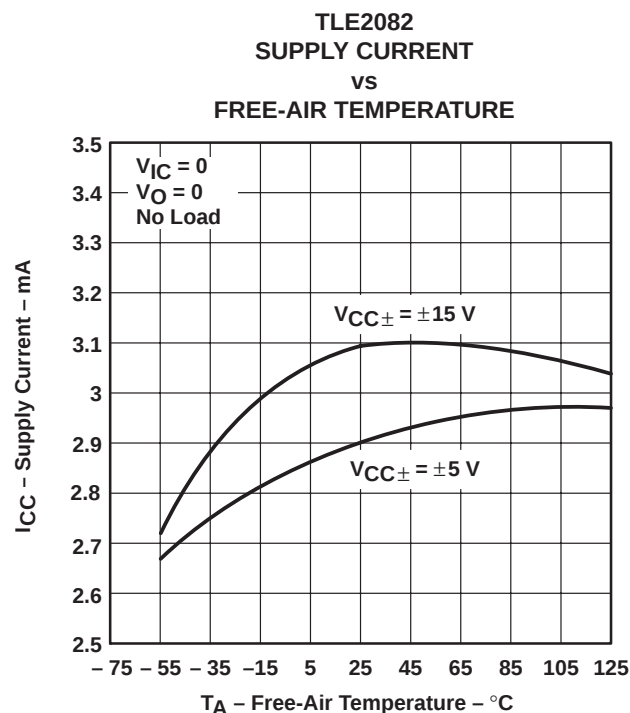


Figure 42

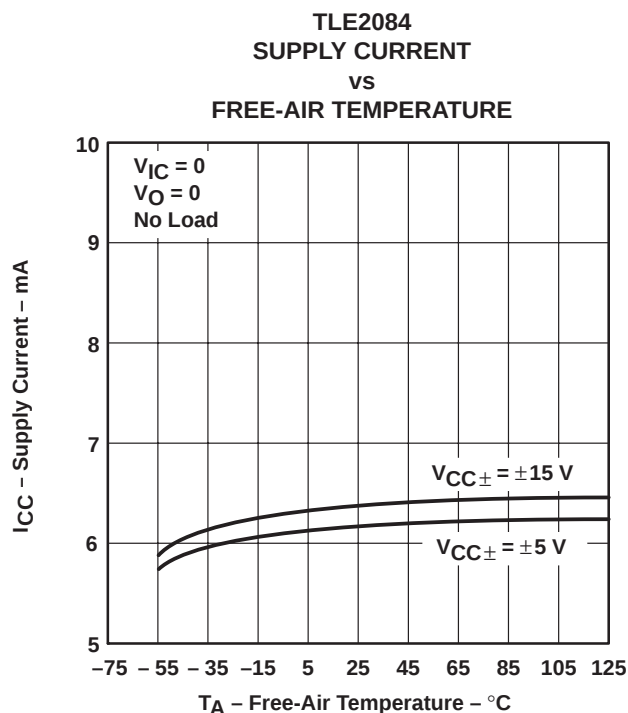


Figure 43

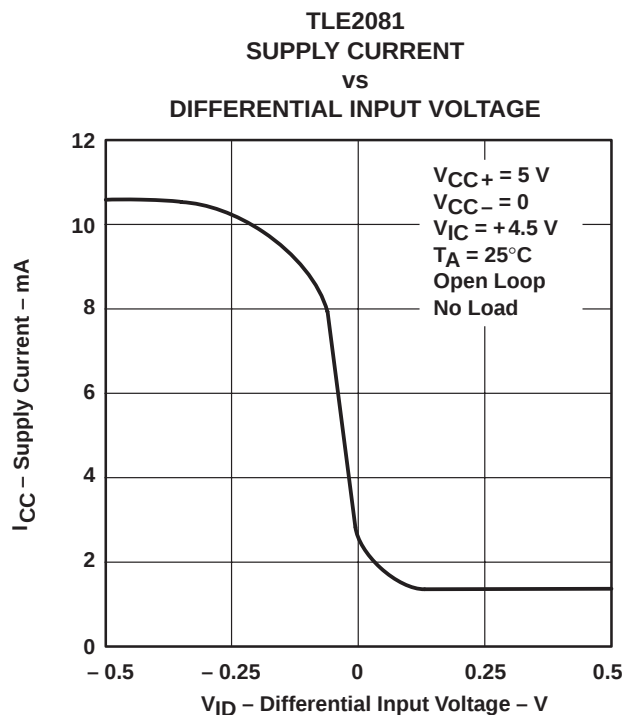


Figure 44





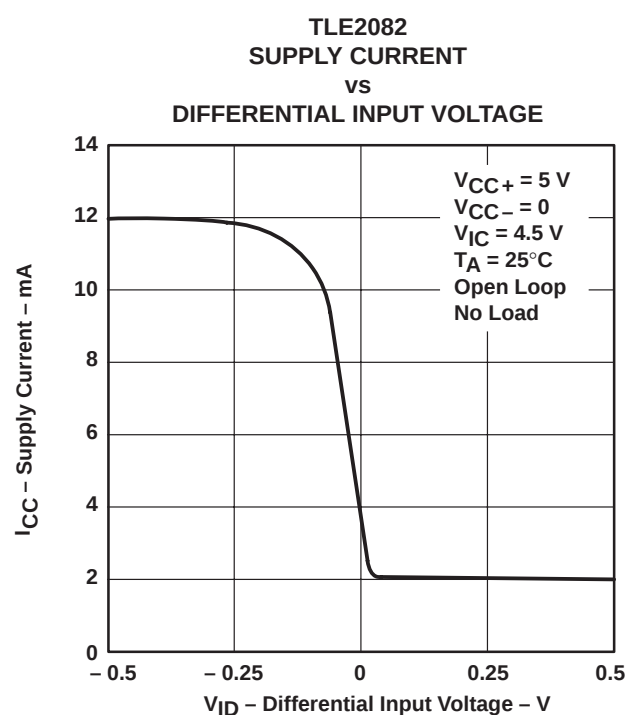


Figure 45

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

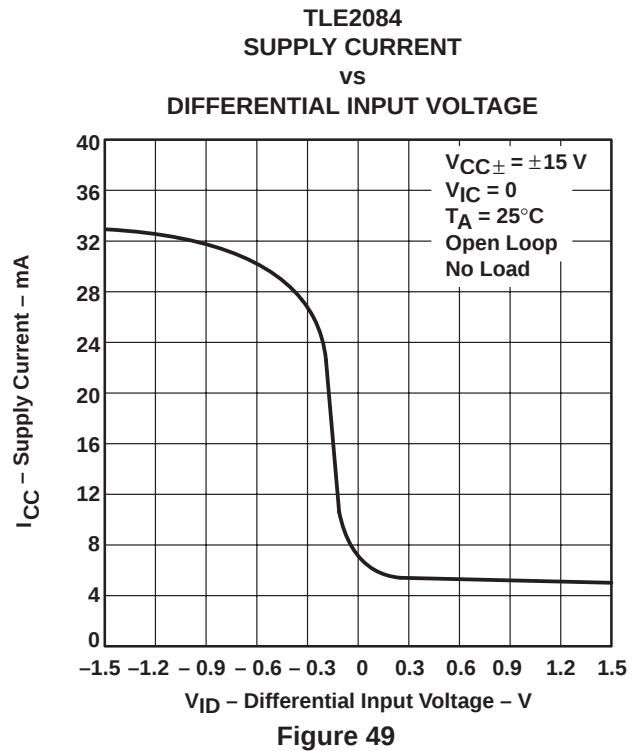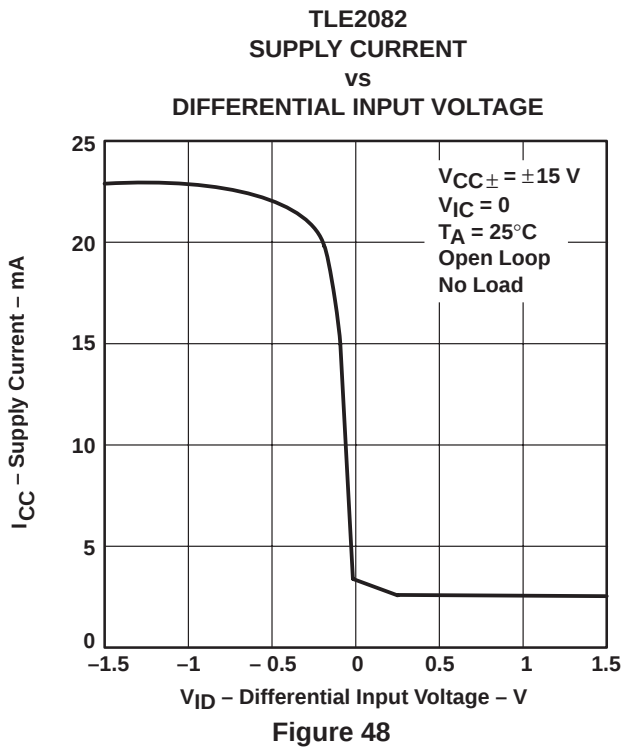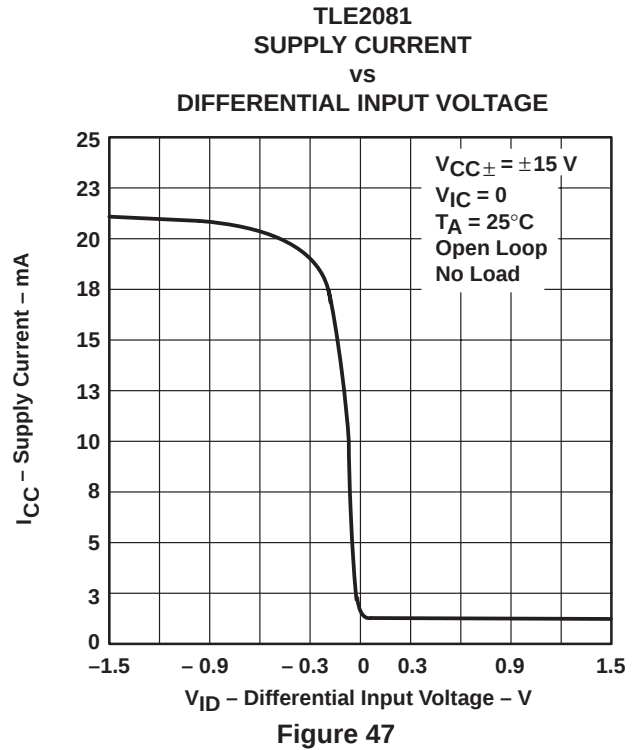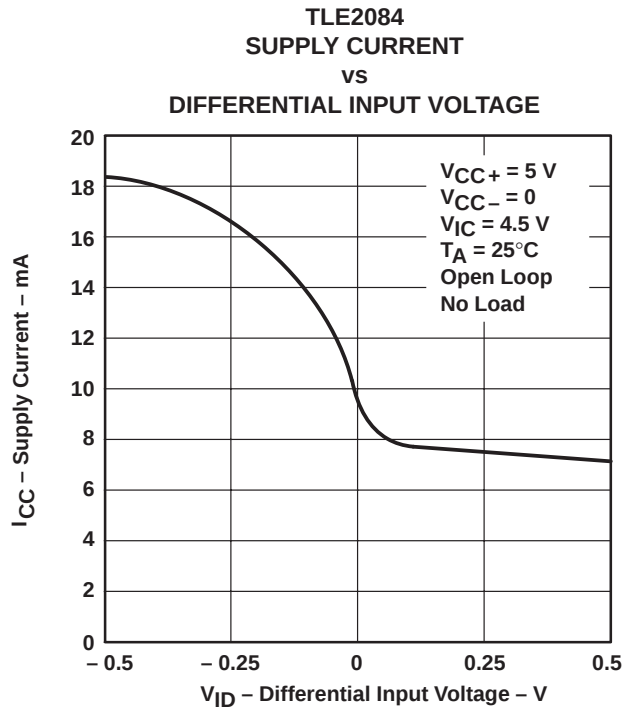

# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## TYPICAL CHARACTERISTICS†

SHORT-CIRCUIT OUTPUT CURRENT  
VS  
SUPPLY VOLTAGE

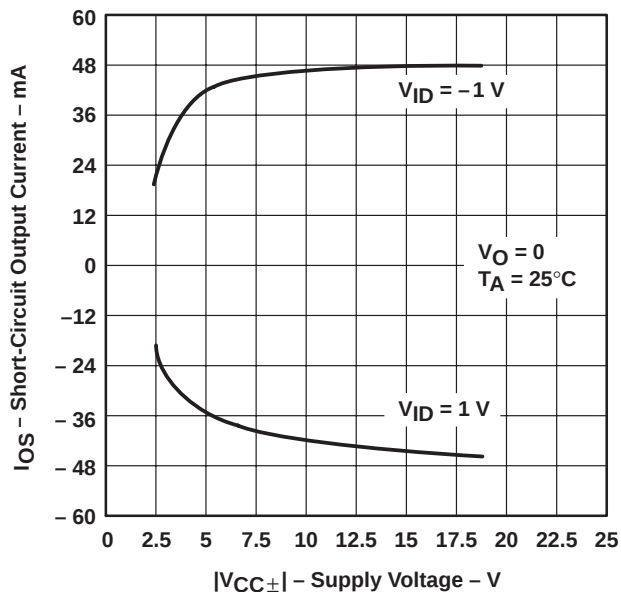


Figure 50

SHORT-CIRCUIT OUTPUT CURRENT  
VS  
ELAPSED TIME

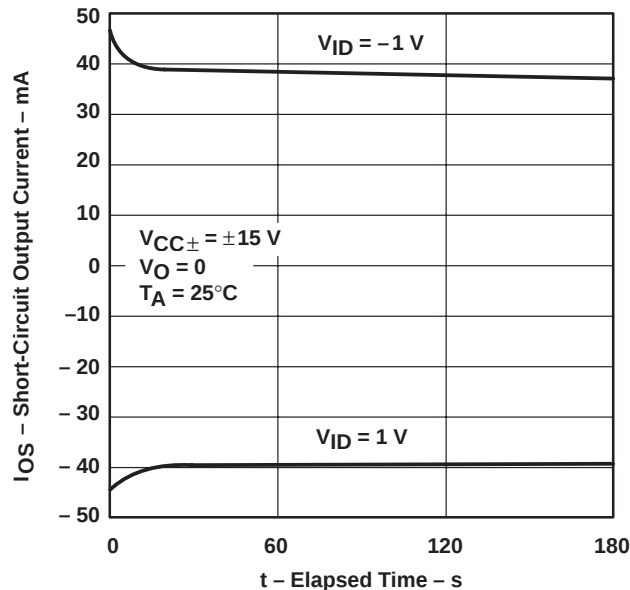


Figure 51

SHORT-CIRCUIT OUTPUT CURRENT  
VS  
FREE-AIR TEMPERATURE

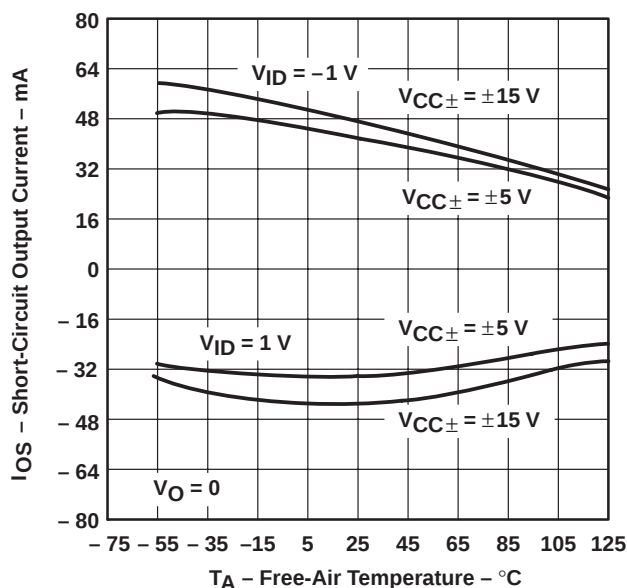


Figure 52

SLEW RATE  
VS  
FREE-AIR TEMPERATURE

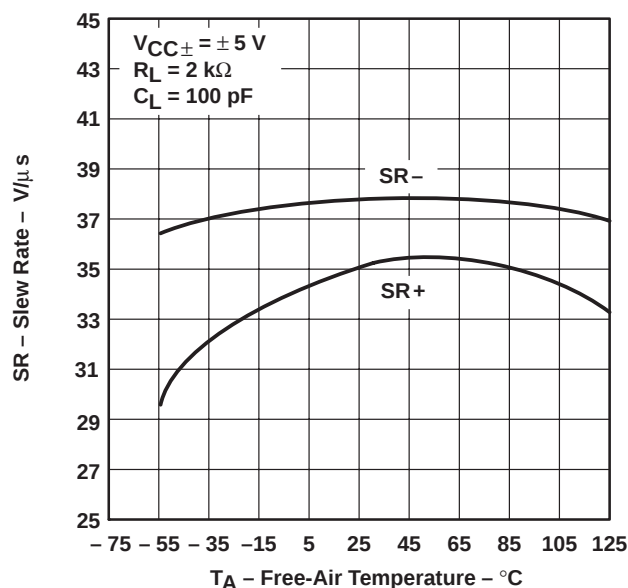


Figure 53

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS†

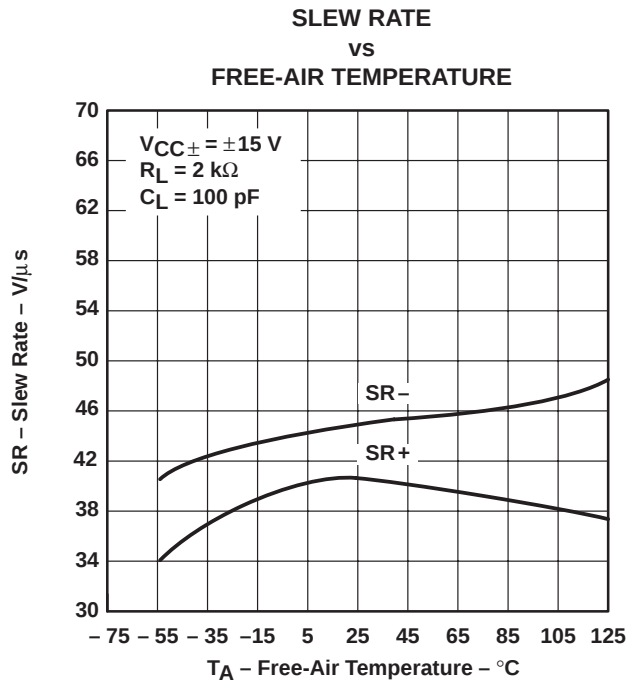


Figure 54

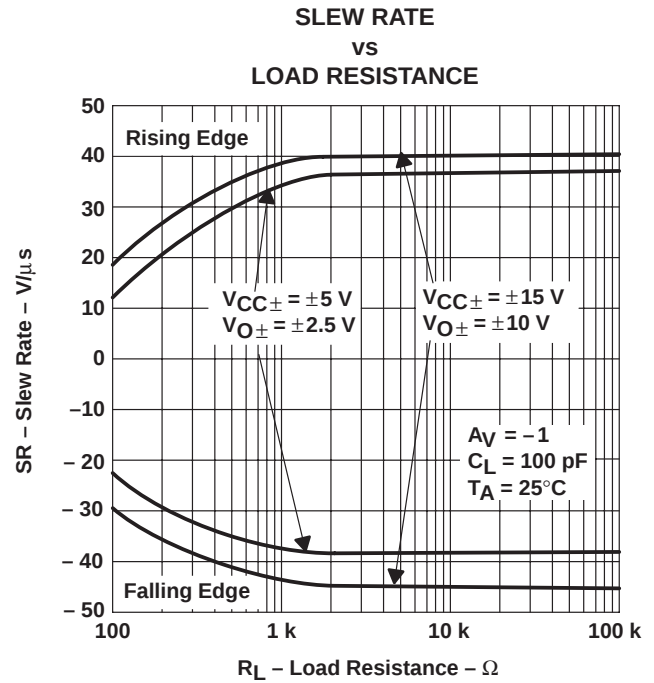


Figure 55

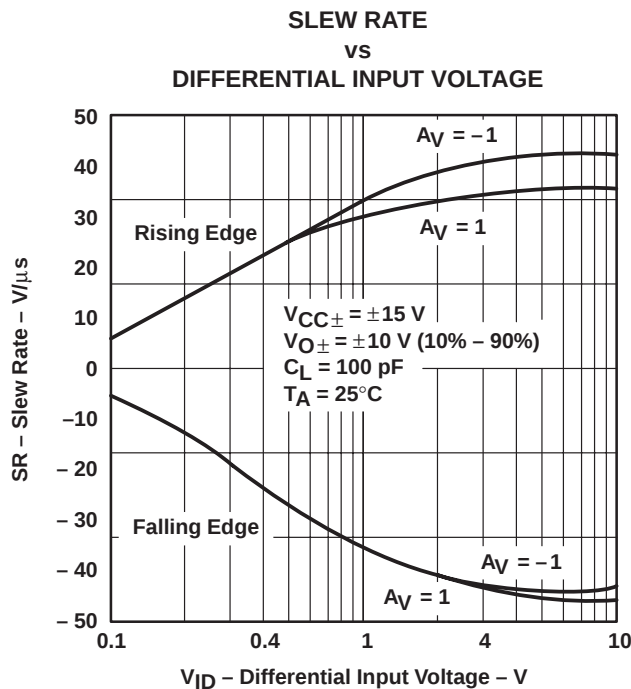


Figure 56

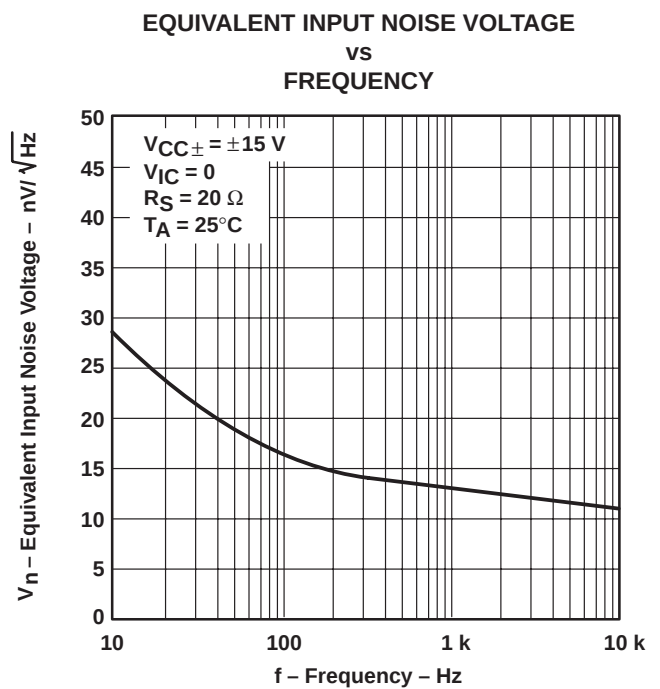


Figure 57

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## TYPICAL CHARACTERISTICS

INPUT-REFERRED NOISE VOLTAGE  
VS  
NOISE BANDWIDTH FREQUENCY

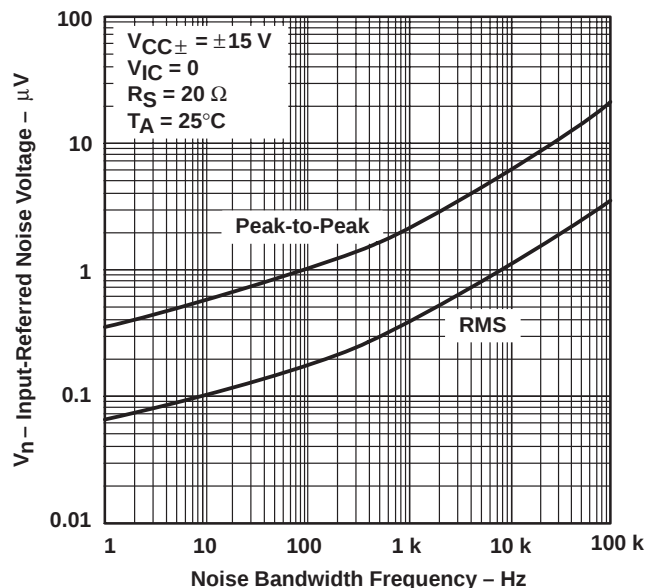


Figure 58

INPUT-REFERRED NOISE VOLTAGE  
OVER A 10-SECOND TIME INTERVAL

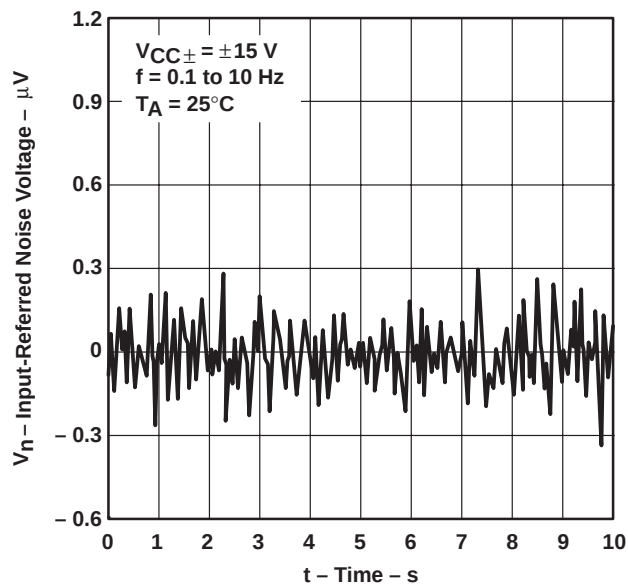


Figure 59

THIRD-OCTAVE SPECTRAL NOISE DENSITY  
VS  
FREQUENCY BANDS

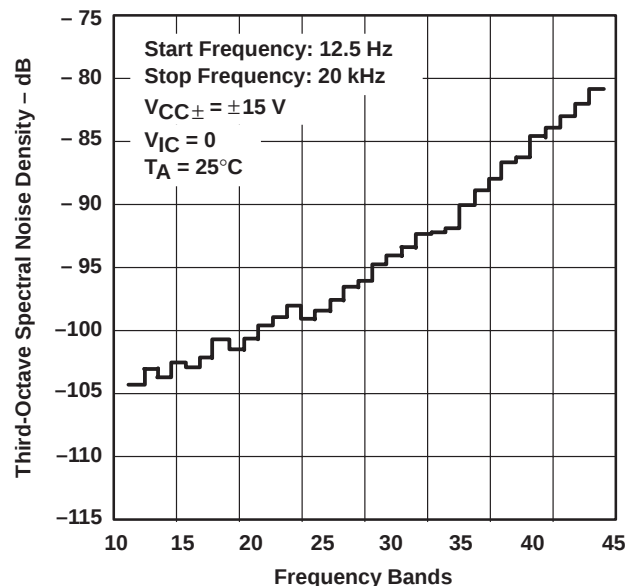


Figure 60

TOTAL HARMONIC DISTORTION PLUS NOISE  
VS  
FREQUENCY

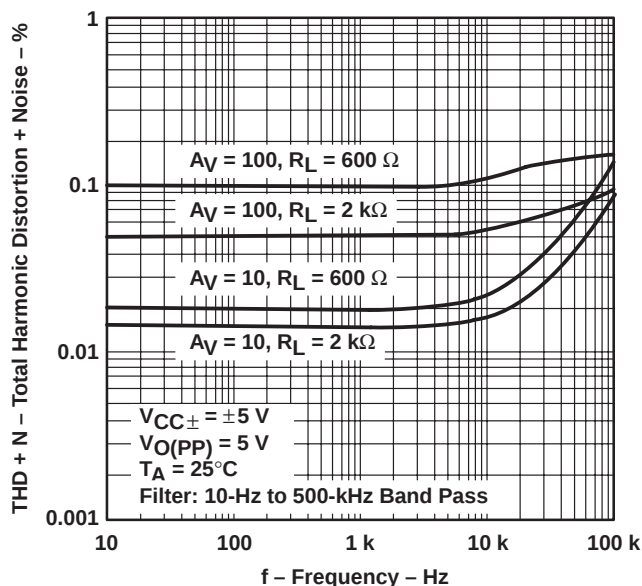


Figure 61

# TYPICAL CHARACTERISTICS†

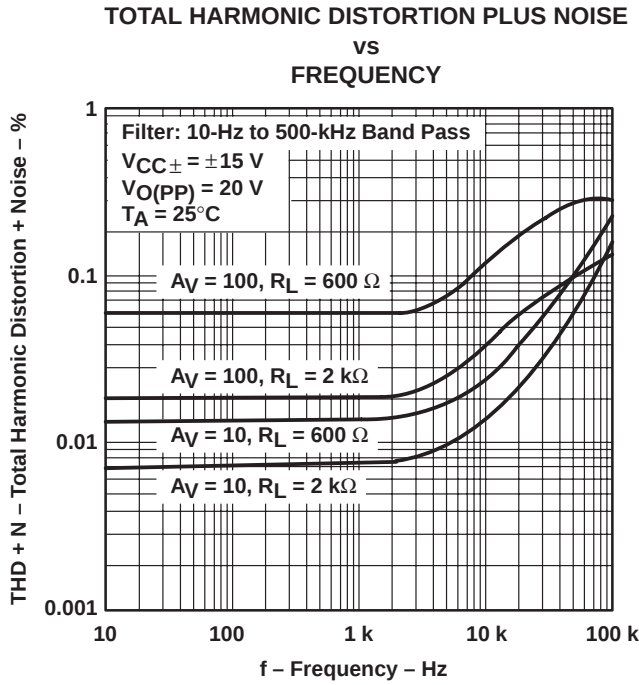


Figure 62

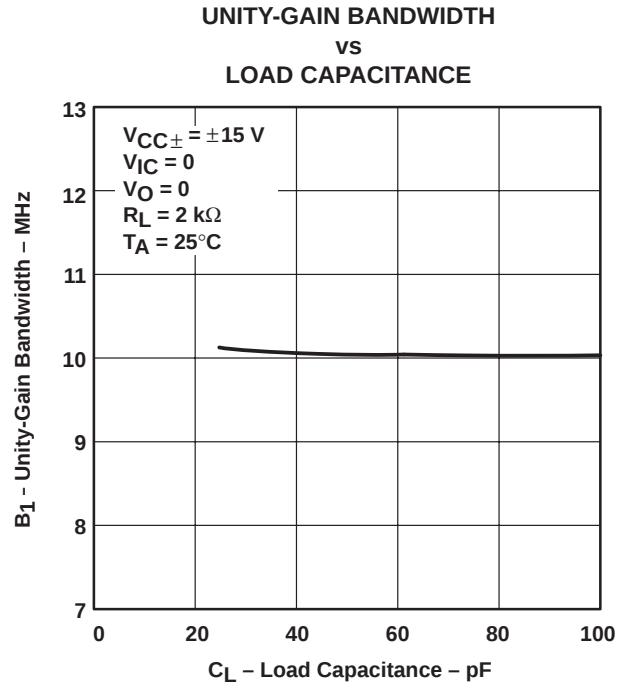


Figure 63

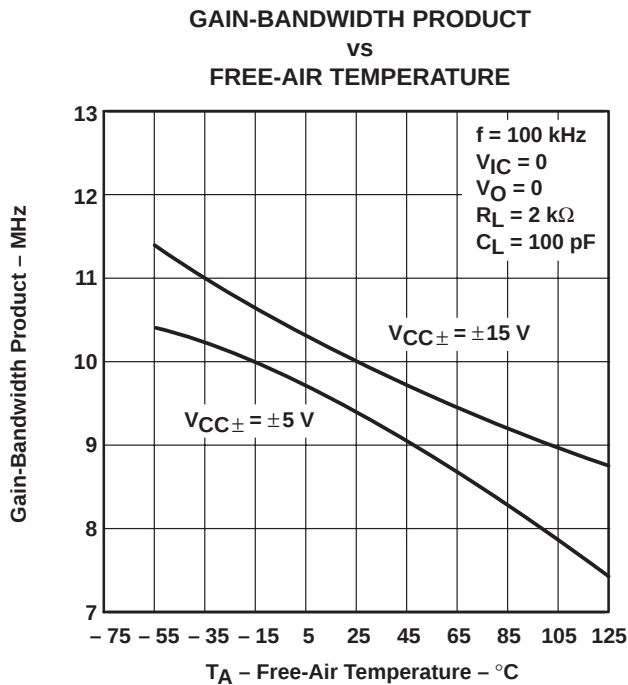


Figure 64

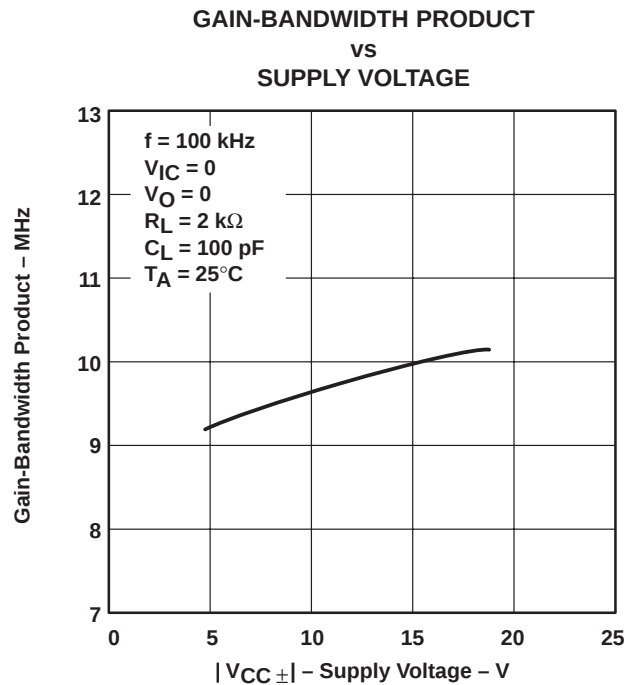


Figure 65

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## TYPICAL CHARACTERISTICS†

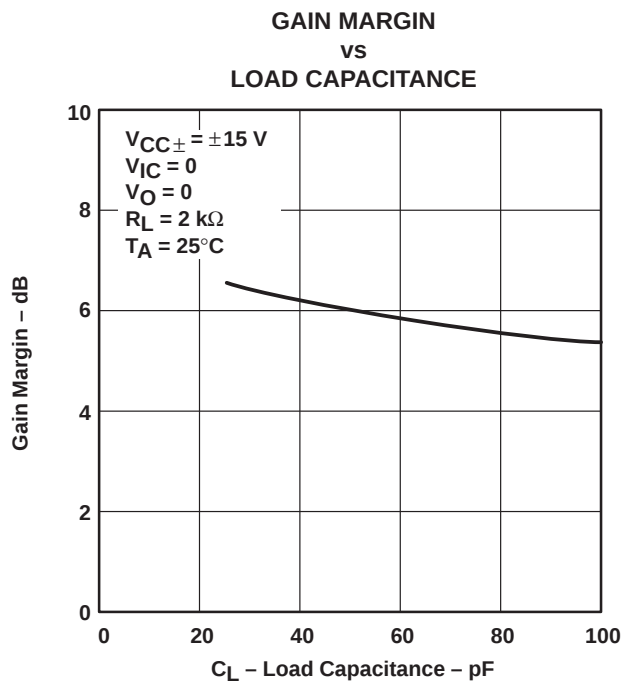


Figure 66

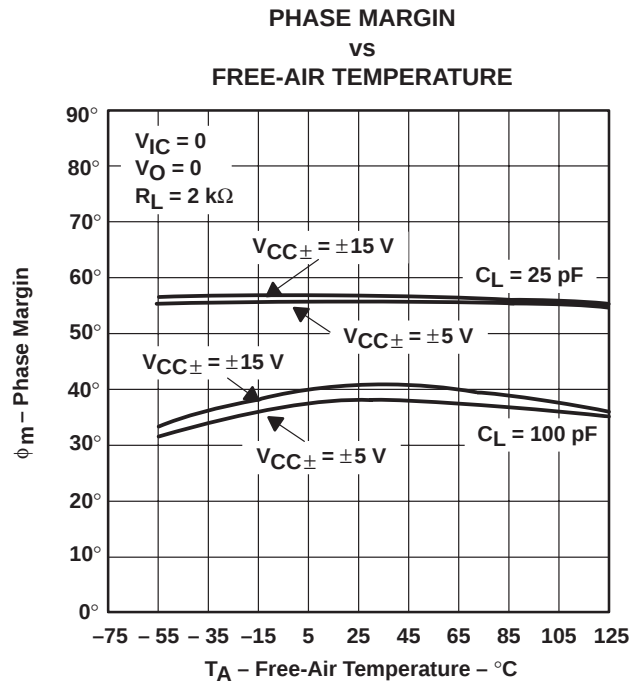


Figure 67

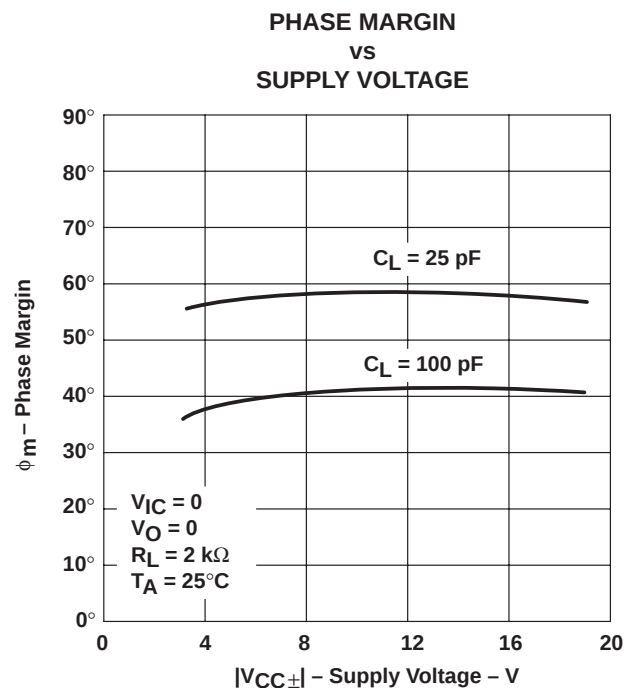


Figure 68

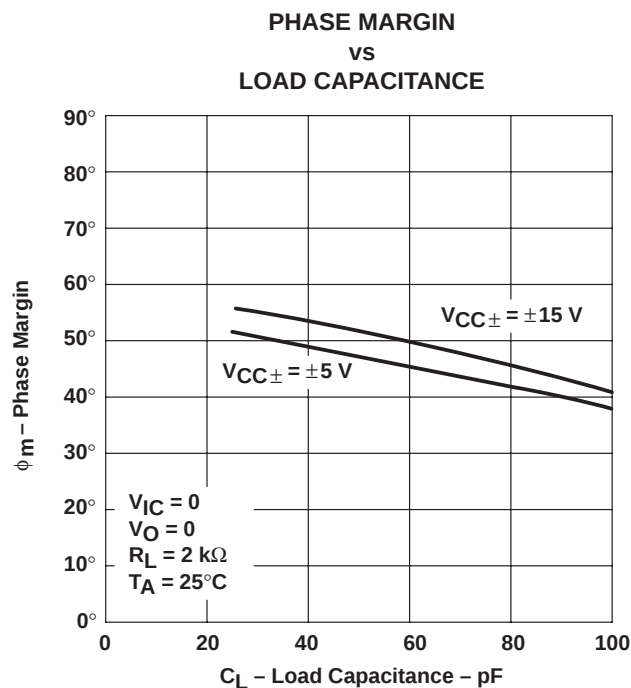


Figure 69

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS†

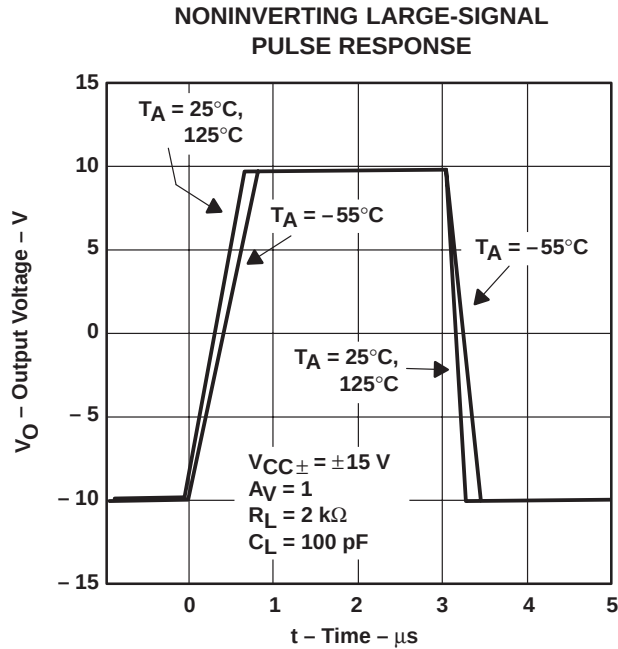


Figure 70

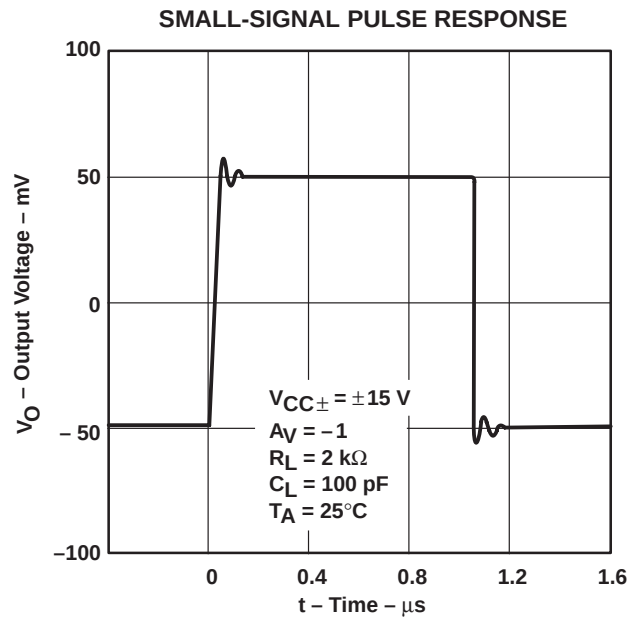


Figure 71

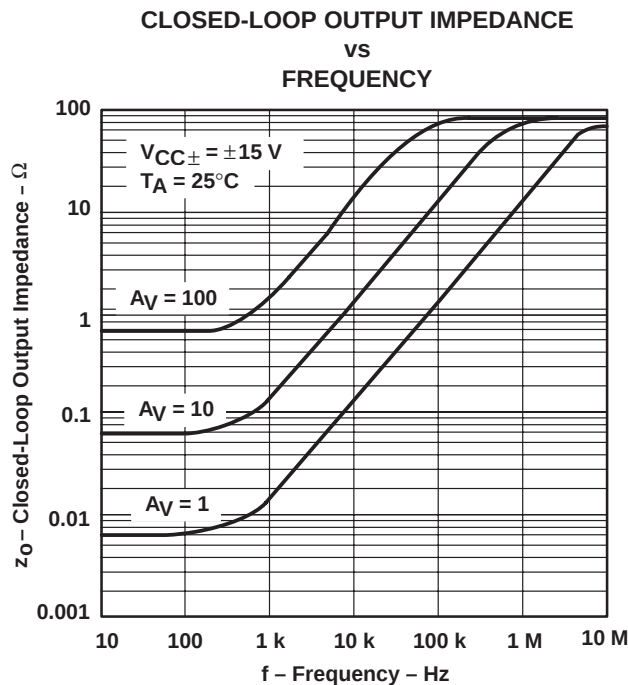


Figure 72

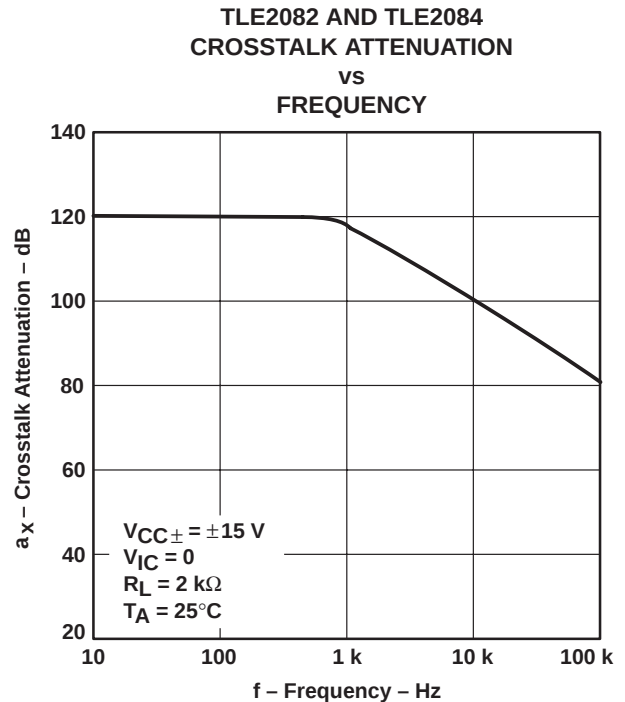


Figure 73

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLE208x, TLE208xA, TLE208xB EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## APPLICATION INFORMATION

### input characteristics

The TLE208x, TLE208xA, and TLE208xB are specified with a minimum and a maximum input voltage that if exceeded at either input could cause the device to malfunction. Because of the extremely high input impedance and resulting low bias current requirements, the TLE208x, TLE208xA, and TLE208xB are well suited for low-level signal processing; however, leakage currents on printed-circuit boards and sockets can easily exceed bias current requirements and cause degradation in system performance. It is good practice to include guard rings around inputs (see Figure 74). These guards should be driven from a low-impedance source at the same voltage level as the common-mode input.

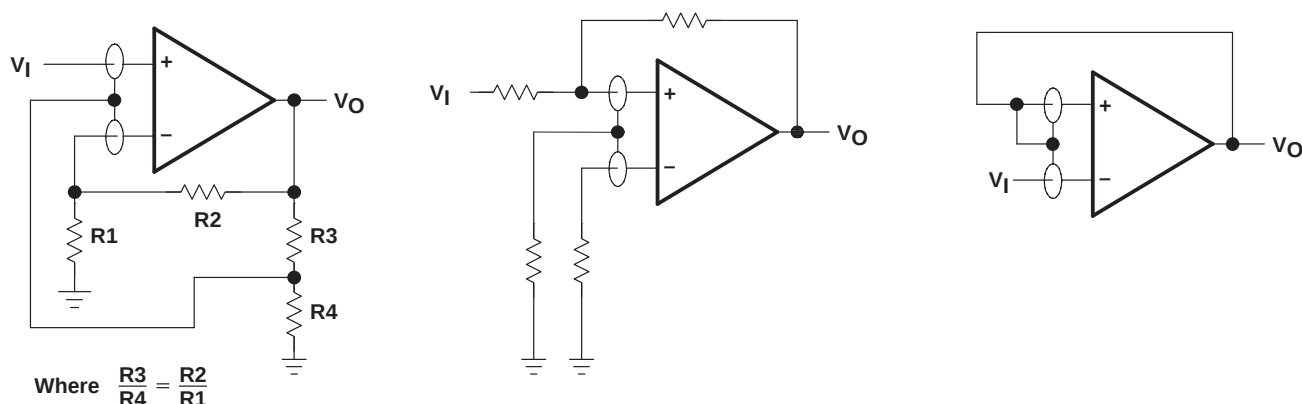


Figure 74. Use of Guard Rings

### TLE2081 input offset voltage nulling

The TLE2061 series offers external null pins that can be used to further reduce the input offset voltage. The circuit of Figure 75 can be connected as shown if the feature is desired. When external nulling is not needed, the null pins may be left unconnected.

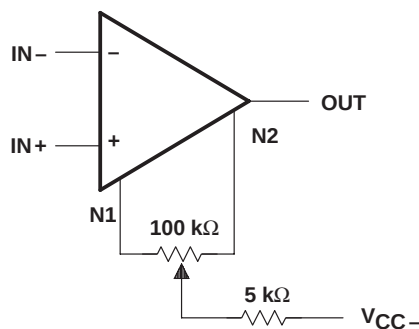


Figure 75. Input Offset Voltage Nulling

## APPLICATION INFORMATION

### macromodel information

Macromodel information provided was derived using *PSpice™ Parts™* model generation software. The Boyle macromodel (see Note 4) and subcircuit in Figure 58 were generated using the TLE208x typical electrical and operating characteristics at  $T_A = 25^\circ\text{C}$ . Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases):

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity-gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

NOTE 4: G.R. Boyle, B.M. Cohn, D. O. Pederson, and J. E. Solomon, "Macromodeling of Integrated Circuit Operational Amplifiers", *IEEE Journal of Solid-State Circuits*, SC-9, 353 (1974).

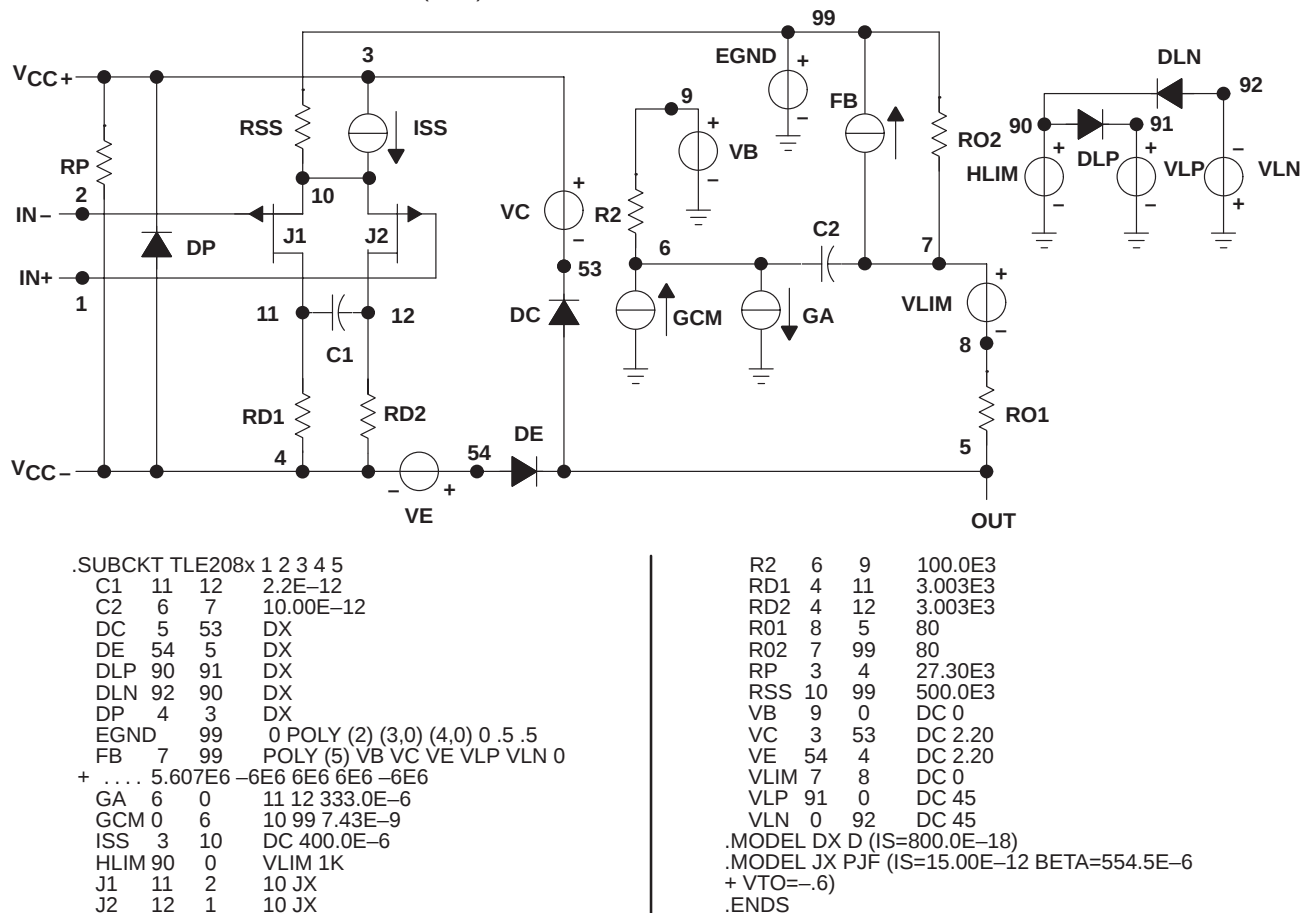



Figure 76. Boyle Macromodel and Subcircuit

*PSpice* and *Parts* are trademarks of MicroSim Corporation.

## SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**D (R-PDSO-G\*\*)**

## 14 PIN SHOWN

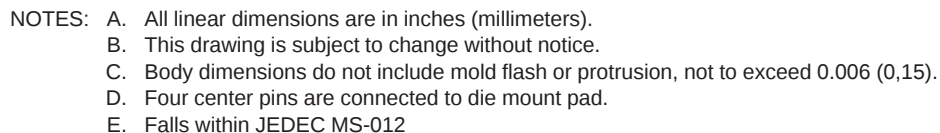

**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**


SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**MECHANICAL INFORMATION**

**DW (R-PDSO-G\*\*)**

**PLASTIC SMALL-OUTLINE PACKAGE**

**16 PIN SHOWN**

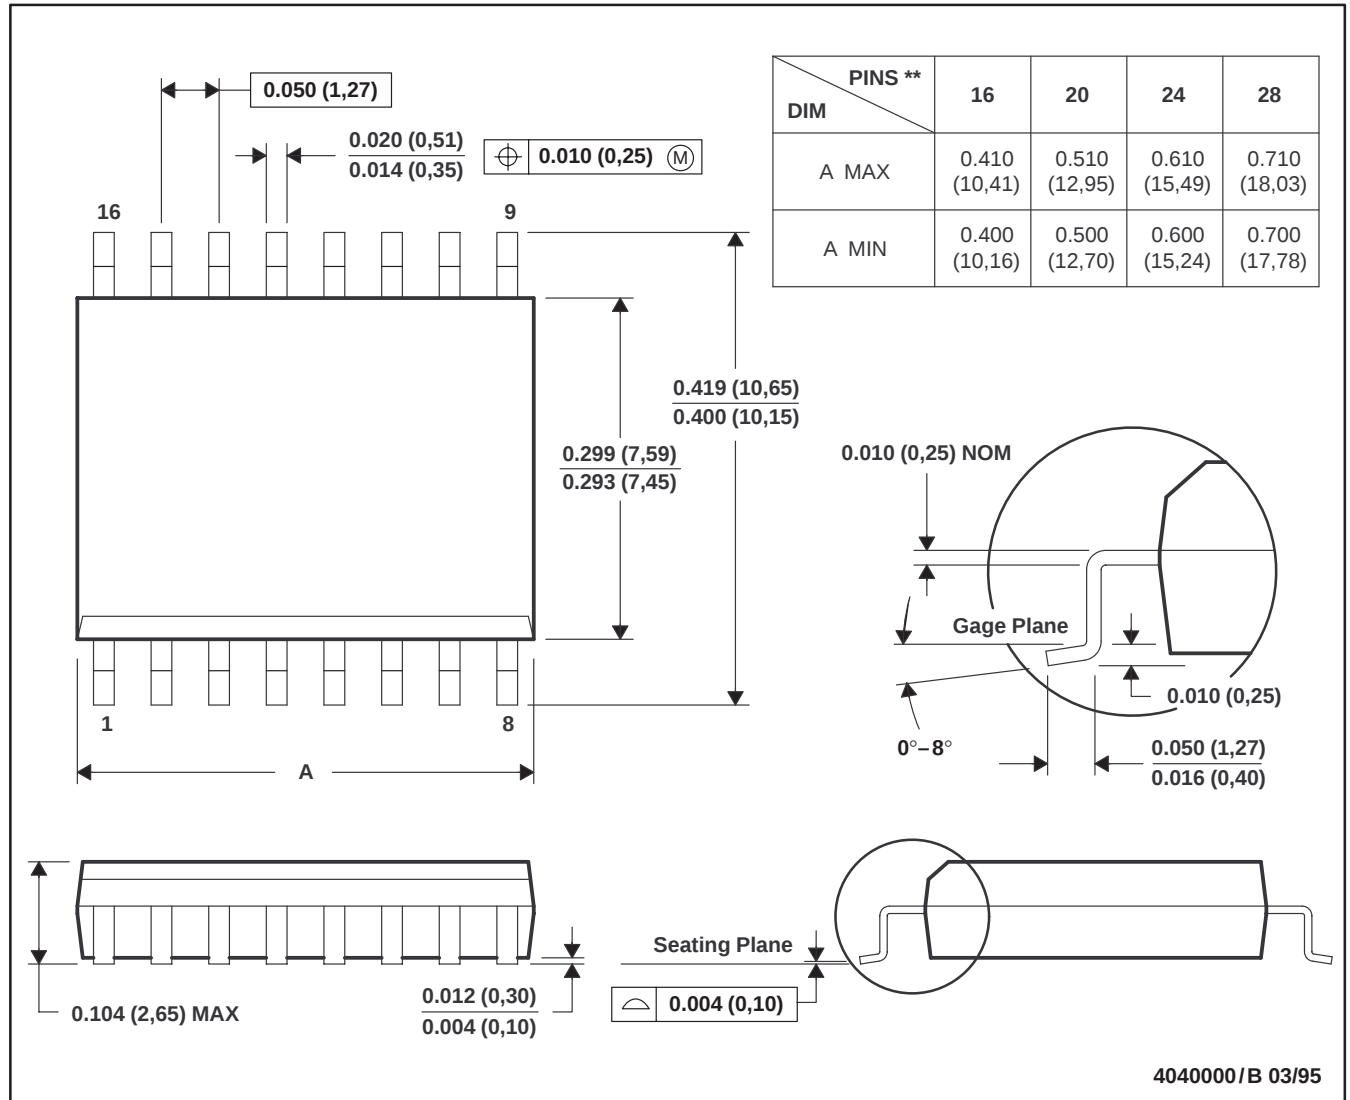

- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).  
 D. Falls within JEDEC MS-013

# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS


SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## MECHANICAL INFORMATION

FK (S-CQCC-N\*\*)

LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN

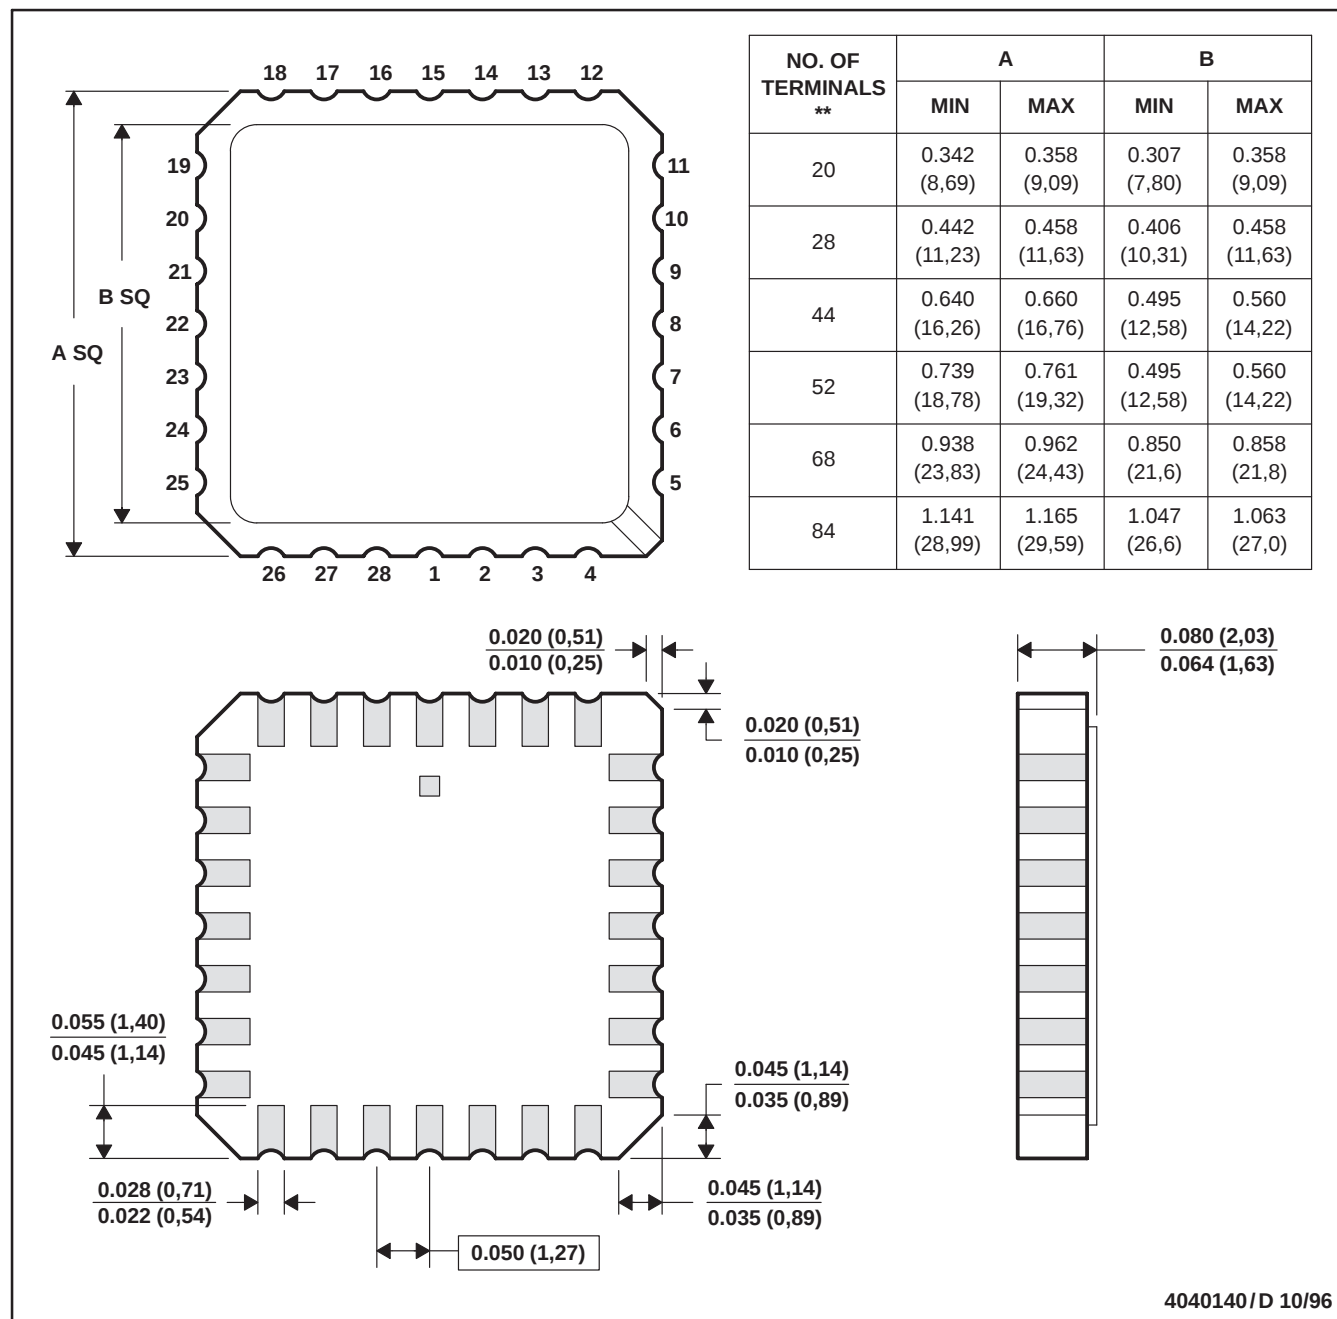

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a metal lid.
  - D. The terminals are gold plated.
  - E. Falls within JEDEC MS-004

**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**


SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**MECHANICAL INFORMATION**

**J (R-GDIP-T\*\*)**

**CERAMIC DUAL-IN-LINE PACKAGE**

**14 PIN SHOWN**

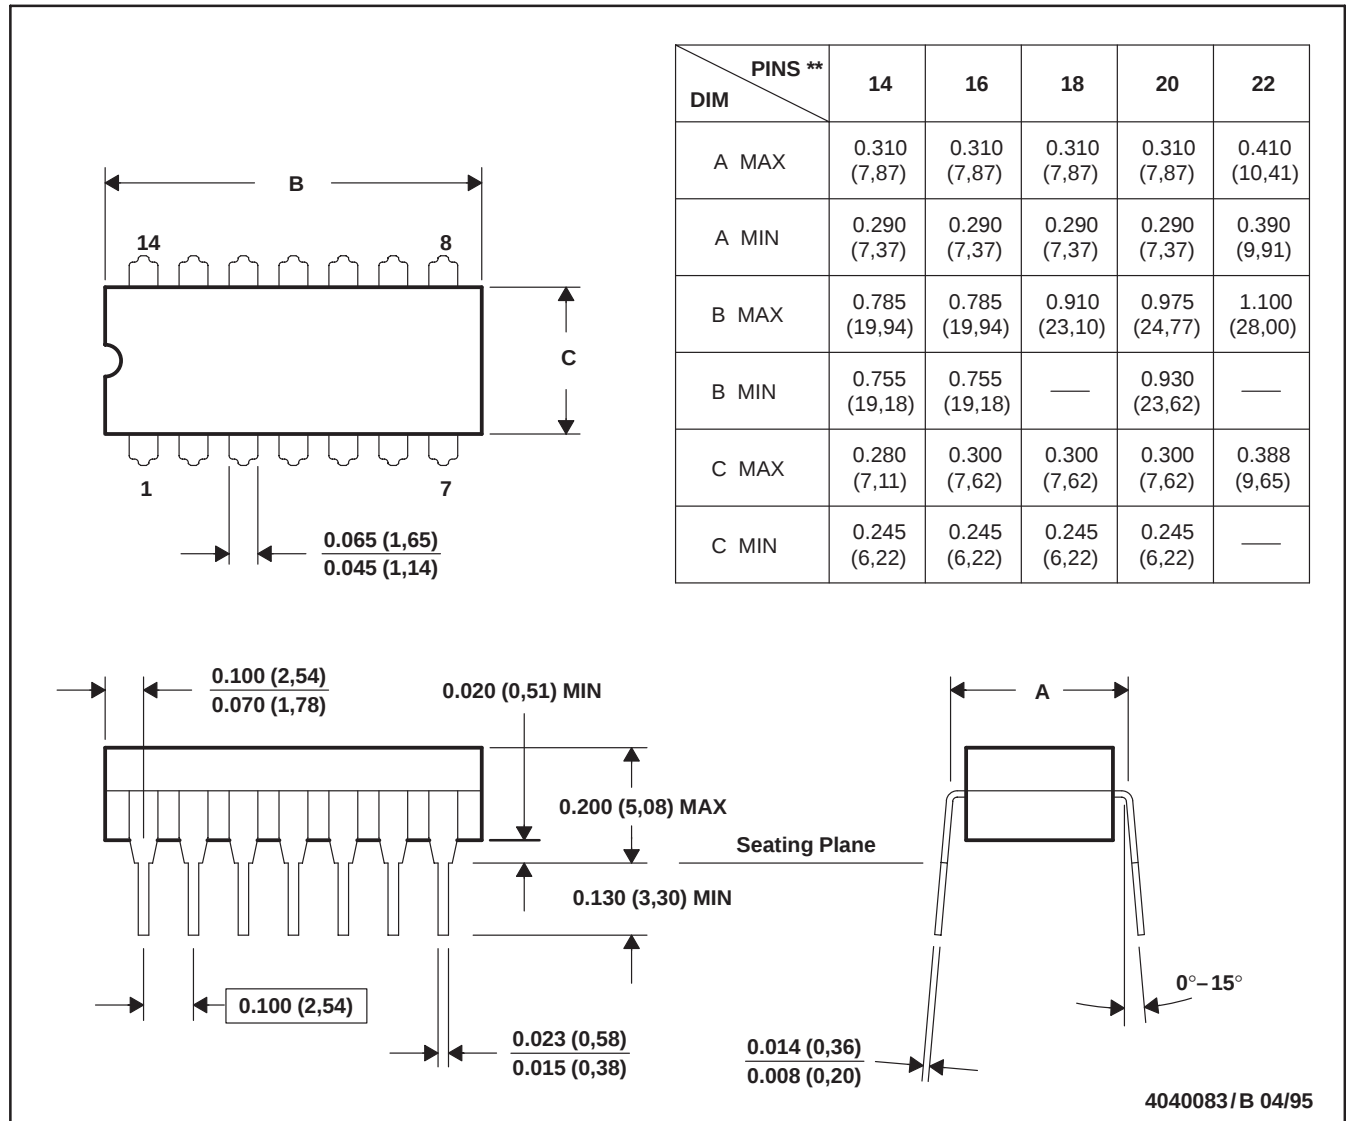

- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. This package can be hermetically sealed with a ceramic lid using glass frit.  
 D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.  
 E. Falls within MIL-STD-1835 GDIP1-T14, GDIP1-T16, GDIP1-T18, GDIP1-T20, and GDIP1-T22


# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## MECHANICAL INFORMATION

JG (R-GDIP-T8)

CERAMIC DUAL-IN-LINE PACKAGE

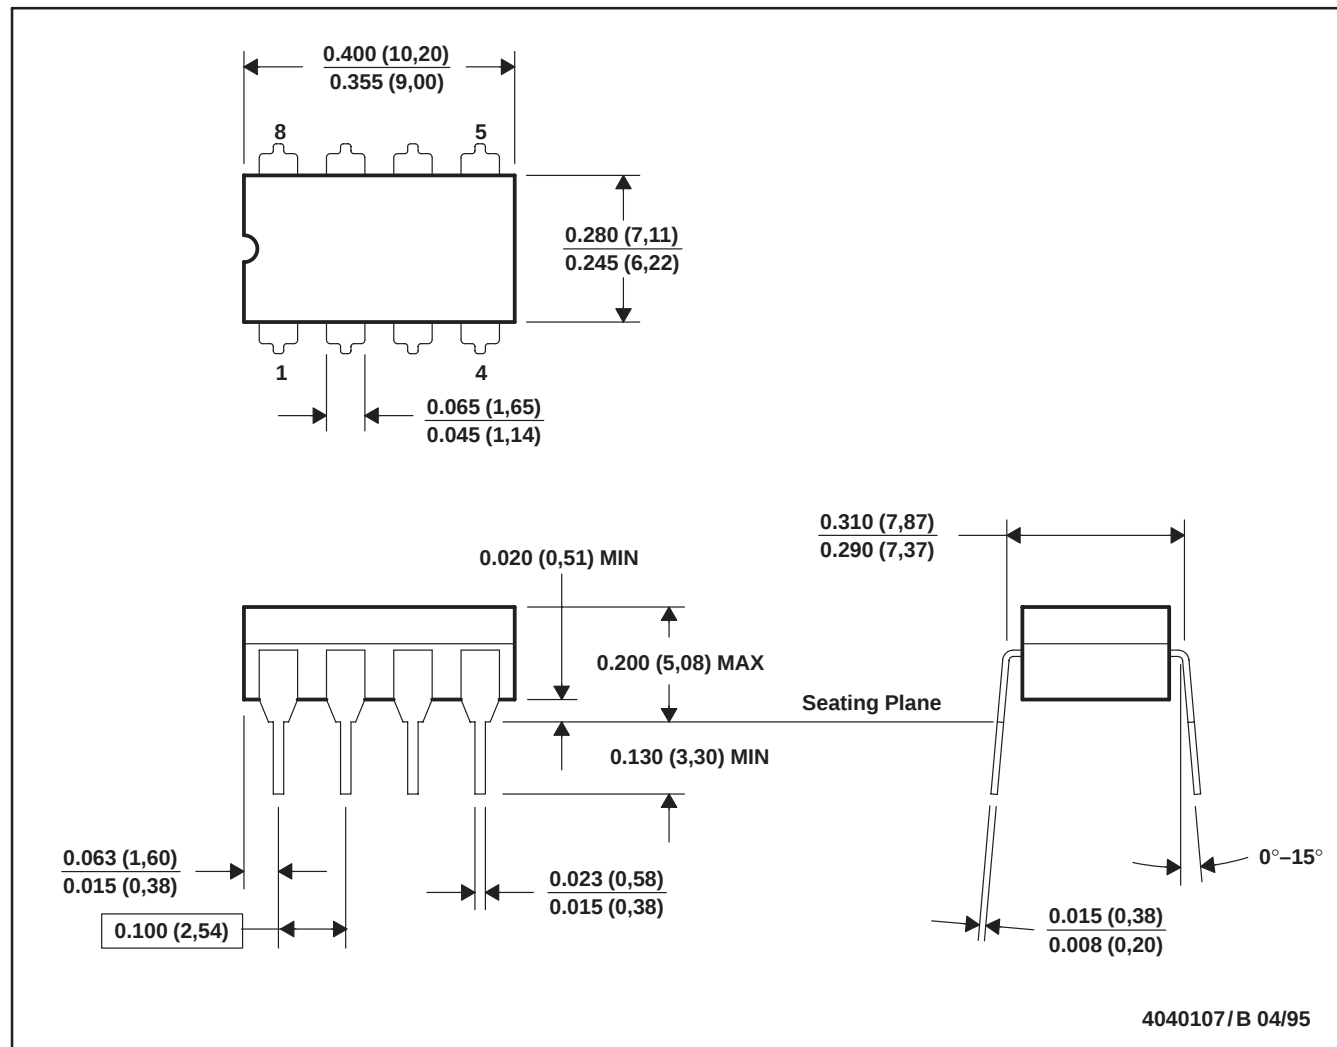

- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. This package can be hermetically sealed with a ceramic lid using glass frit.  
 D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only  
 E. Falls within MIL-STD-1835 GDIP1-T8

**TLE208x, TLE208xA, TLE208xY**  
**EXCALIBUR HIGH-SPEED JFET-INPUT**  
**OPERATIONAL AMPLIFIERS**


SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

**MECHANICAL INFORMATION**

**N (R-PDIP-T\*\*)**

**PLASTIC DUAL-IN-LINE PACKAGE**

**16 PIN SHOWN**

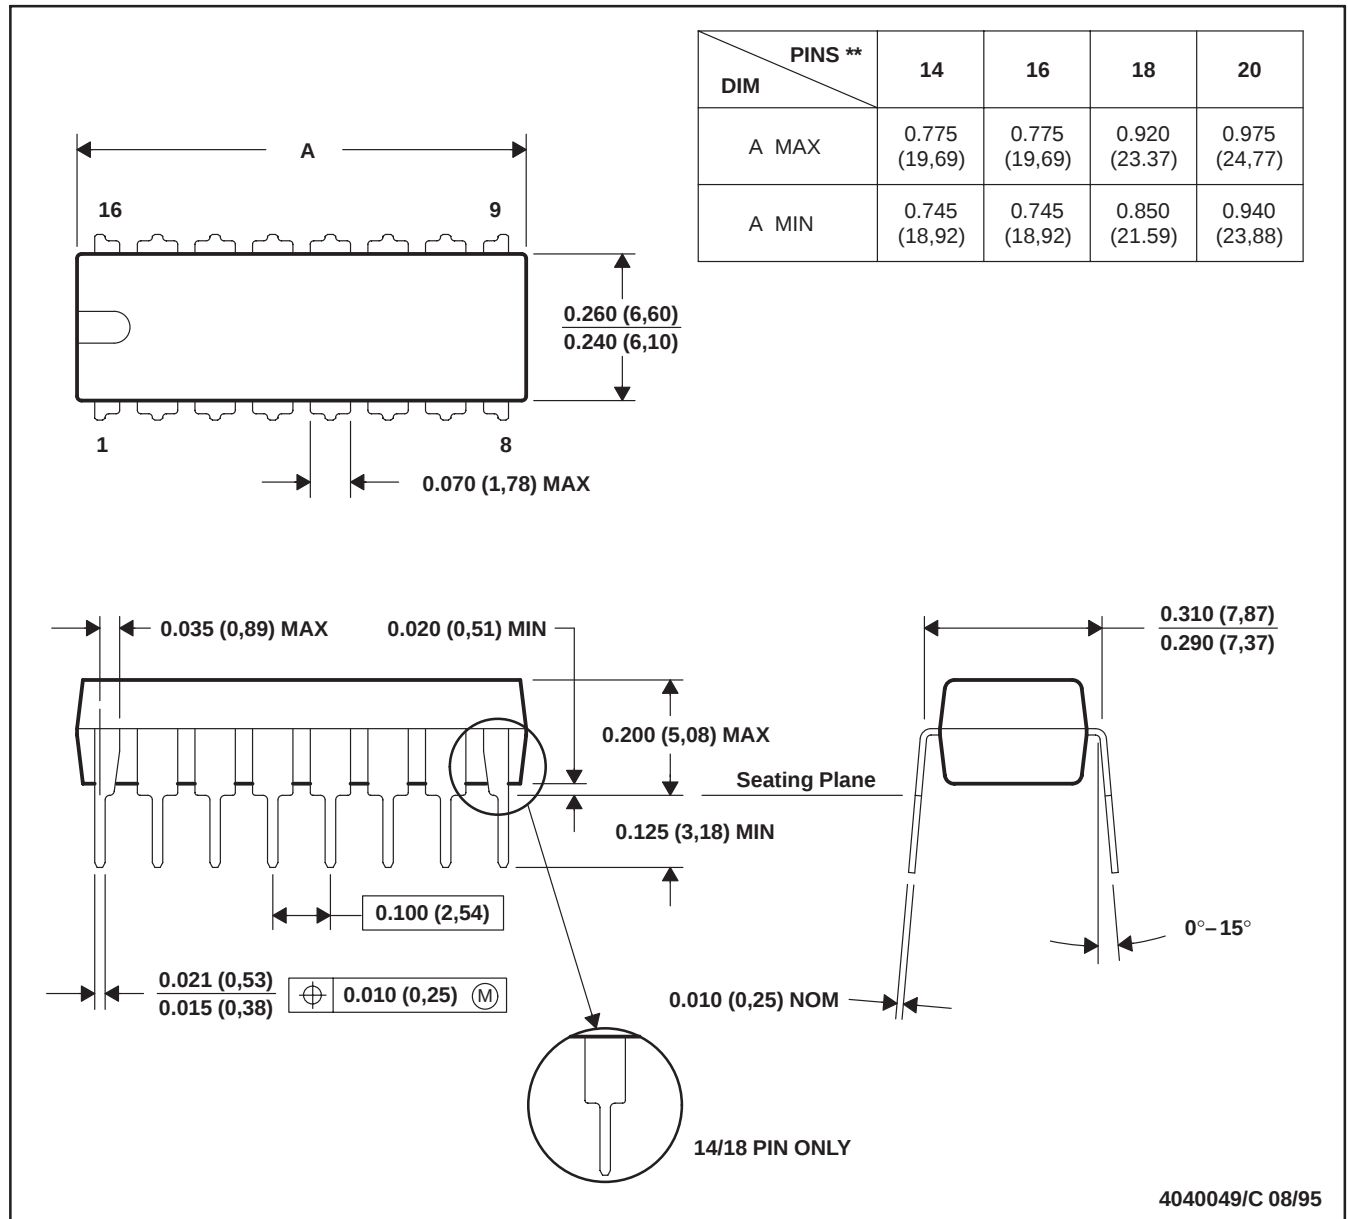

- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. Falls within JEDEC MS-001 (20 pin package is shorter than MS-001.)


# TLE208x, TLE208xA, TLE208xY EXCALIBUR HIGH-SPEED JFET-INPUT OPERATIONAL AMPLIFIERS

SLOS182A – FEBRUARY 1997 – REVISED MARCH 2000

## MECHANICAL INFORMATION

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE

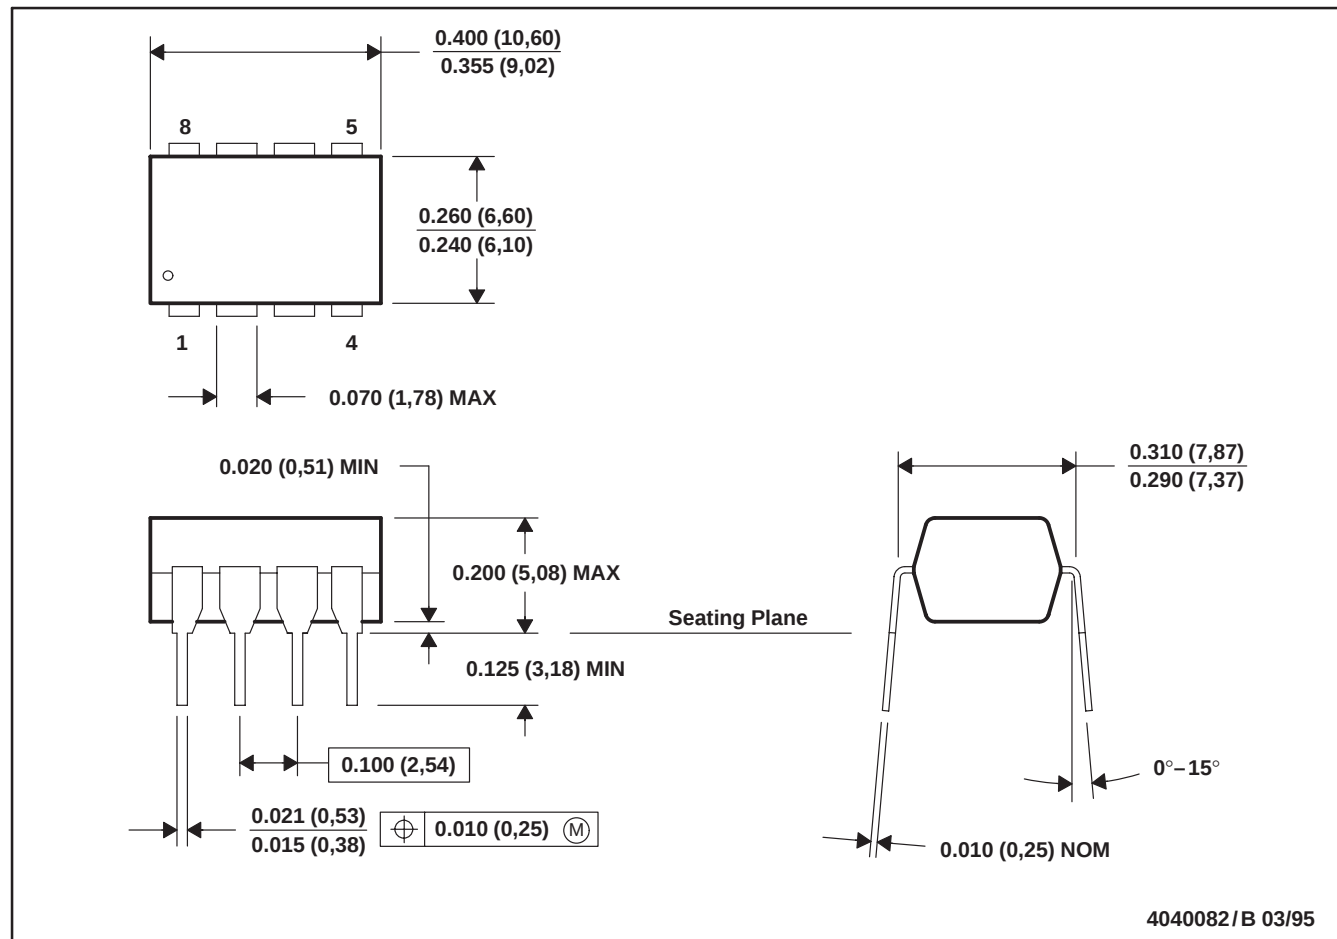

- NOTES: A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.  
C. Falls within JEDEC MS-001

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.