



Features

- Up to 33 dBm Output Power in CW Mode
- High Power Added Efficiency (PAE)
- Single Supply Operation at 2.4 V (1 W) or 3.2 V (2 W)
- Current Consumption in Power-down Mode $\leq 10 \mu\text{A}$
- No External Power Supply Switch Required
- Power Ramp Control
- Simple Input and Output Matching for Maximum Flexibility
- SMD Package (PSSOP16 with Heat Slug)

Electrostatic sensitive device.
Observe precautions for handling.




Description

The T0930 is a monolithic integrated power amplifier IC. The device is manufactured with Atmel's Silicon-Germanium (SiGe) technology and has been designed for use in 900-MHz two-way pagers, PDAs, meter readers and ISM phones.

With a single supply voltage of 2.4 V to 3.4 V and a neglectable leakage current in power-down mode, the pager amplifier only needs few external components and thus helps to reduce system costs. It is suited for operation in CW mode.

Figure 1. Block Diagram

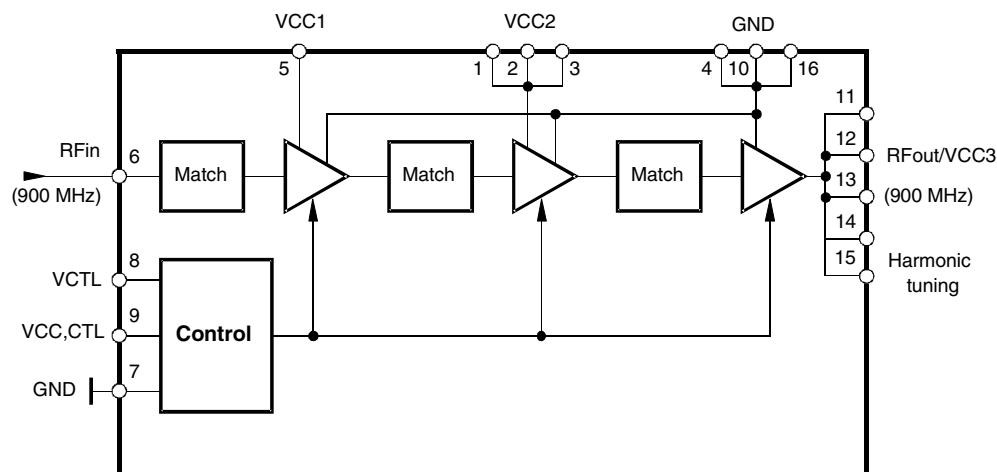


SiGe Power Amplifier for CW Applications

T0930



Pin Configuration

Figure 2. Pinning PSSOP16

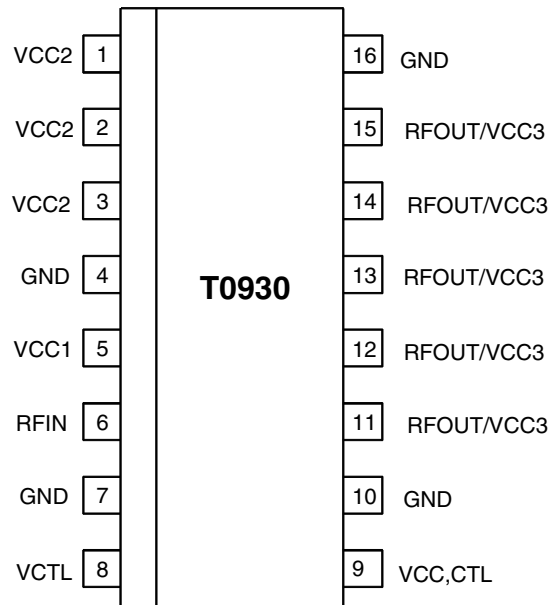

Pin Description

Pin	Symbol	Function
1	VCC2	Supply voltage 2
2	VCC2	Supply voltage 2
3	VCC2	Supply voltage 2
4	GND	Ground
5	VCC1	Supply voltage 1
6	RFIN	RF input
7	GND	Ground (control)
8	VCTL	Control input
9	VCC,CTL	Supply voltage for control
10	GND	Ground (optional)
11	RFOUT/VCC3	RF output/supply voltage 3
12	RFOUT/VCC3	RF output/supply voltage 3
13	RFOUT/VCC3	RF output/supply voltage 3
14	RFOUT/VCC3	RF output/supply voltage 3
15	RFOUT/VCC3	RF output/harmonic tuning
16	GND	Ground

Absolute Maximum Ratings

All voltages refer to GND

Parameters	Symbol	Min.	Max.	Unit
Supply voltage V_{CC} at $V_{CTL} = 1.7$ V, Pin 5 Pin 1, 2, 3 Pins 11, 12, 13, 14 and 15 Pin 9	V_{CC1} V_{CC2} V_{CC3} $V_{CC, CTL}$		4 4 4 4	V
Input power, Pin 6	P_{in}		12	dBm
Gain control voltage ⁽¹⁾ , Pin 8	V_{CTL}	0	2	V
Duty cycle for operation			100	%
Junction temperature	T_j		+150	°C
Storage temperature	T_{stg}	-40	+150	°C

Note: 1. The gain control voltage should always be 0.2 V below the supply voltage. RF should be applied before ramp-up.

Operating Range

All voltages referred to GND

Parameters	Symbol	Min.	Typ.	Max.	Unit
Supply voltage $V_{CC}^{(1)}$ 1 W application	$V_{CC1}, V_{CC2}, V_{CC3},$ $V_{CC, CTL}$	1.8	2.4	3	V
Supply voltage $V_{CC}^{(1)}$ 2 W application	$V_{CC1}, V_{CC2}, V_{CC3},$ $V_{CC, CTL}$	2.6	3.2	3.6	V
Ambient temperature	T_{amb}	-25		+85	°C
Input frequency	f_{in}		900		MHz

Note: 1. The gain control voltage should be always 0.2 V below the supply voltage. RF should be applied before ramp-up.

Electrical Characteristics for 1 W Application

$V_{CC} = V_{CC1}, \dots, V_{CC3}, V_{CC, CTL} = +2.4 \text{ V}, V_{CTL} = 1.7 \text{ V}, T_{amb} = +25^\circ\text{C}$, 50- Ω input and 50- Ω external output match

No.	Parameters	Test Conditions	Pin	Symbol	Min.	Typ.	Max.	Unit	Type*
1	Power Supply								
1.1	Supply voltage			V_{CC}	1.8	2.4	3.0	V	A
1.2	Current consumption in active mode	$P_{out} = 30 \text{ dBm}$ $PAE = 47\%$		I		0.9		A	A
1.3	Current consumption (leakage current) in power-down mode	$V_{CTL} \leq 0.2 \text{ V}$		I			10	μA	A
2	RF Input								
2.1	Frequency range			f_{in}	880	900	935	MHz	A
2.2	Input impedance ⁽¹⁾			Z_i		50		Ω	C
2.3	Input power			P_{in}		5	12	dBm	C
2.4	Input VSWR ⁽¹⁾	$P_{in} = 0 \text{ to } 12 \text{ dBm}$ $P_{out} = 30 \text{ dBm}$					2:1		C
3	RF Output								
3.1	Output impedance ⁽¹⁾			Z_o		50		Ω	C
3.2	Output power in normal conditions	$P_{in} = 5 \text{ dBm}$ $R_L = R_G = 50 \Omega$ $V_{CC} = 2.4 \text{ V}, T_{amb} = +25^\circ\text{C}$ $V_{CC} = 1.8 \text{ V}, T_{amb} = +25^\circ\text{C}$		P_{out} P_{out}		30 27		dBm dBm	A
3.3	Minimum output power	$V_{CTL} = 0.3 \text{ V}$				-20		dBm	A
3.4	Power-added efficiency	$V_{CC} = 2.4 \text{ V}, P_{out} = 27 \text{ dBm}$ $V_{CC} = 2.4 \text{ V}, P_{out} = 30 \text{ dBm}$		PAE PAE		40 47		% %	A
3.5	Stability	Temp = -25 to +85°C no spurious $\geq -60 \text{ dBc}$		VSWR			10:1		C
3.6	Load mismatch (stable, no damage)	$P_{out} = 30 \text{ dBm}$, all phases		VSWR			10:1		C
3.7	Second harmonic distortion			2fo			-35	dBc	A
3.8	Third harmonic distortion			3fo			-35	dBc	A
3.9	Noise power $f = 925 \text{ to } 935 \text{ MHz}$ $f \geq 935 \text{ MHz}$	$P_{out} = 30 \text{ dBm}$ RBW = 100 kHz				-73 -85	-70 -82	dBm dBm	C
3.10	Rise and fall time						0.5	ms	A
3.11	Isolation between input and output	$P_{in} = 0 \text{ to } 10 \text{ dBm}$ $V_{CTL} \leq 0.2 \text{ V}$ (power down)			50			dB	C
4	Power Control								
4.1	Control curve	$P_{out} \geq 25 \text{ dBm}$					150	dB/V	C
4.2	Power control range	$V_{CTL} = 0.3 \text{ to } 2.0 \text{ V}$			50			dB	C
4.3	Control voltage range			V_{CTL}	0.3		2.0	V	A
4.4	Control current	$P_{in} = 0 \text{ to } 10 \text{ dBm}, V_{CTL} = 0 \text{ to } 2.0 \text{ V}$		I_{CTL}			200	μA	A

*) Type means: A = 100% tested, B = 100% correlation tested, C = Characterized on samples, D = Design parameter

Notes: 1. With external matching (see "Application Circuit").

Electrical Characteristics for 2 W Application

$V_{CC} = V_{CC1}, \dots, V_{CC3}, V_{CC, CTL} = +3.2 \text{ V}, V_{CTL} = 1.9 \text{ V}, T_{amb} = +25^\circ\text{C}$, 50- Ω input and 50- Ω external output match

No.	Parameters	Test Conditions	Pin	Symbol	Min.	Typ.	Max.	Unit	Type*
5	Power Supply								
5.1	Supply voltage			V_{CC}	2.6	3.2	3.6	V	A
5.2	Current consumption in active mode	$P_{out} = 33 \text{ dBm}$ $PAE = 47\%$		I		1.33		A	A
5.3	Current consumption (leakage current) in power-down mode	$V_{CTL} \leq 0.2 \text{ V}$		I			10	μA	A
6	RF Input								
6.1	Frequency range			f_{in}	880	900	935	MHz	A
6.2	Input impedance ⁽¹⁾			Z_i		50		Ω	C
6.3	Input power			P_{in}		5	12	dBm	C
6.4	Input VSWR ⁽¹⁾	$P_{in} = 0 \text{ to } 12 \text{ dBm}$ $P_{out} = 30 \text{ dBm}$					2:1		C
7	RF Output								
7.1	Output impedance ⁽¹⁾			Z_o		50		Ω	C
7.2	Output power in normal conditions	$P_{in} = 5 \text{ dBm}, R_L = R_G = 50 \Omega$ $V_{CC} = 3.2 \text{ V}, T_{amb} = +25^\circ\text{C}$ $V_{CC} = 2.2 \text{ V}, T_{amb} = +25^\circ\text{C}$		P_{out} P_{out}		33 30		dBm dBm	A
7.3	Minimum output power	$V_{CTL} = 0.3 \text{ V}$				-20		dBm	A
7.4	Power-added efficiency	$V_{CC} = 3.2 \text{ V}, P_{out} = 27 \text{ dBm}$		PAE		47		%	A
7.5	Stability	Temp = -25 to +85°C no spurious $\geq -60 \text{ dBc}$		VSWR			10:1		C
7.6	Load mismatch (stable, no damage)	$P_{out} = 33 \text{ dBm}$, all phases		VSWR			10:1		C
7.7	Second harmonic distortion			2fo			-35	dBc	A
7.8	Third harmonic distortion			3fo			-35	dBc	A
7.9	Noise power $f = 925 \text{ to } 935 \text{ MHz}$ $f \geq 935 \text{ MHz}$	$P_{out} = 33 \text{ dBm}$ RBW = 100 kHz				-73 -85	-70 -82	dBm dBm	C
7.10	Rise and fall time						0.5	μs	A
7.11	Isolation between input and output	$P_{in} = 0 \text{ to } 10 \text{ dBm}$ $V_{CTL} \leq 0.2 \text{ V}$ (power down)			50			dB	C
8	Power Control								
8.1	Control curve	$P_{out} \geq 25 \text{ dBm}$					150	dB/V	C
8.2	Power control range	$V_{CTL} = 0.3 \text{ to } 2.0 \text{ V}$			50			dB	C
8.3	Control voltage range			V_{CTL}	0.3		2.0	V	A
8.4	Control current	$P_{in} = 0 \text{ to } 10 \text{ dBm}, V_{CTL} = 0 \text{ to } 2.0 \text{ V}$		I_{CTL}			200	μA	A

*) Type means: A = 100% tested, B = 100% correlation tested, C = Characterized on samples, D = Design parameter

Notes: 1. With external matching (see "Application Circuit").

Figure 3. P_{out} and PAE versus V_{CC} (1 W Application)

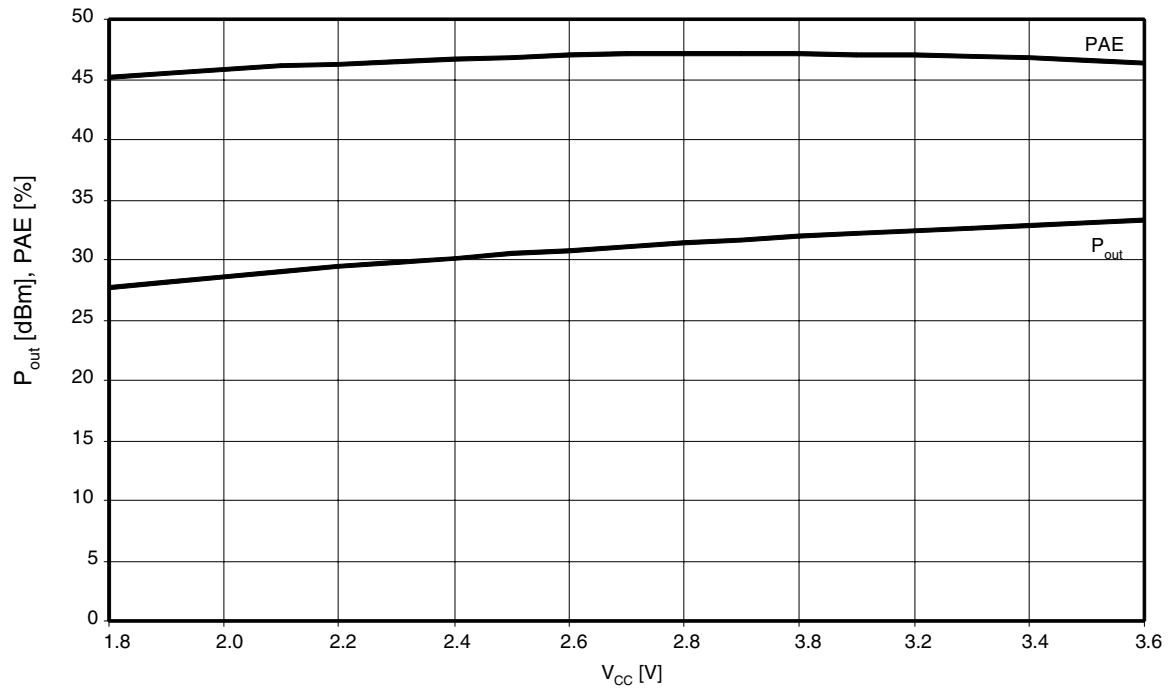


Figure 4. P_{out} and PAE versus V_{ramp} (1 W Application)

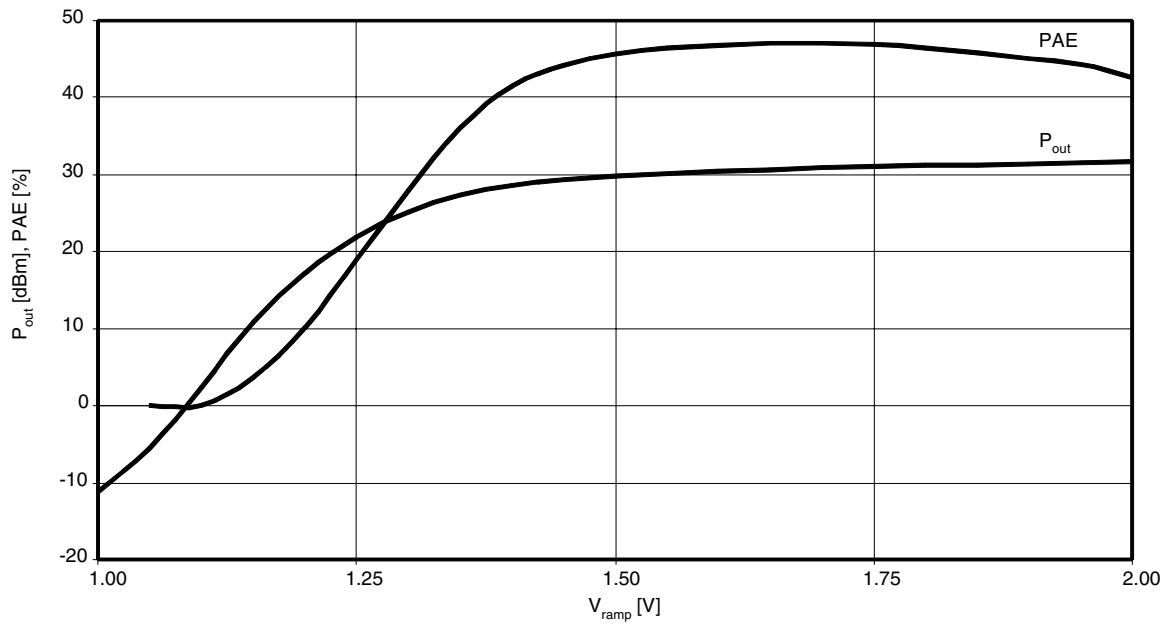


Figure 5. P_{out} and PAE versus V_{CC} (2 W Application)



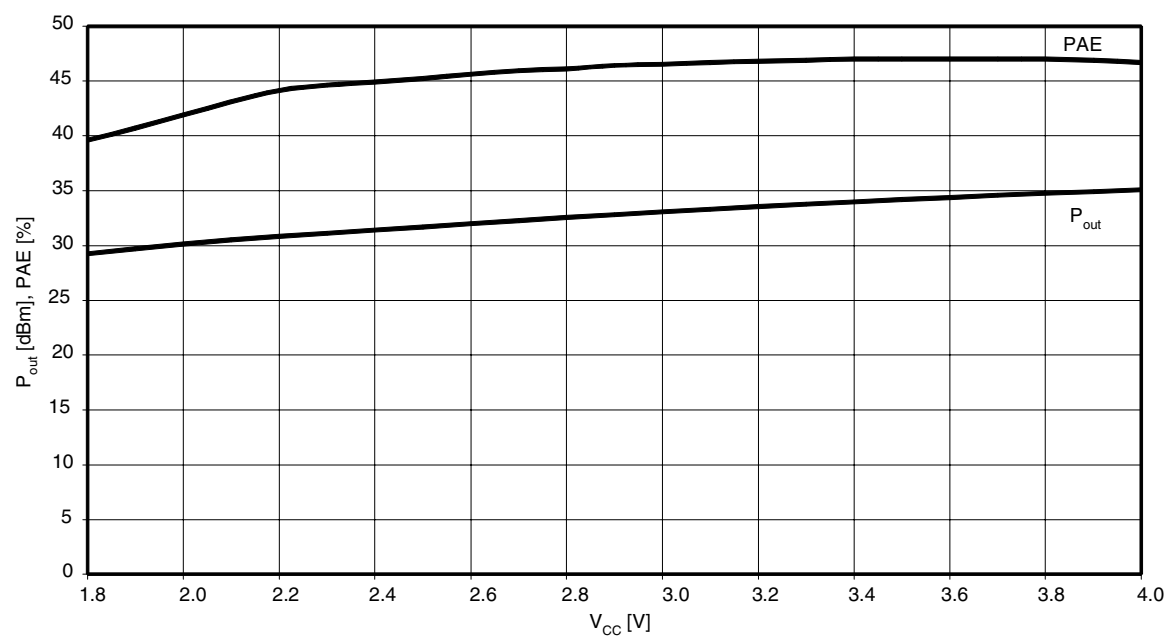


Figure 6. P_{out} and PAE versus V_{ramp} (2 W Application)

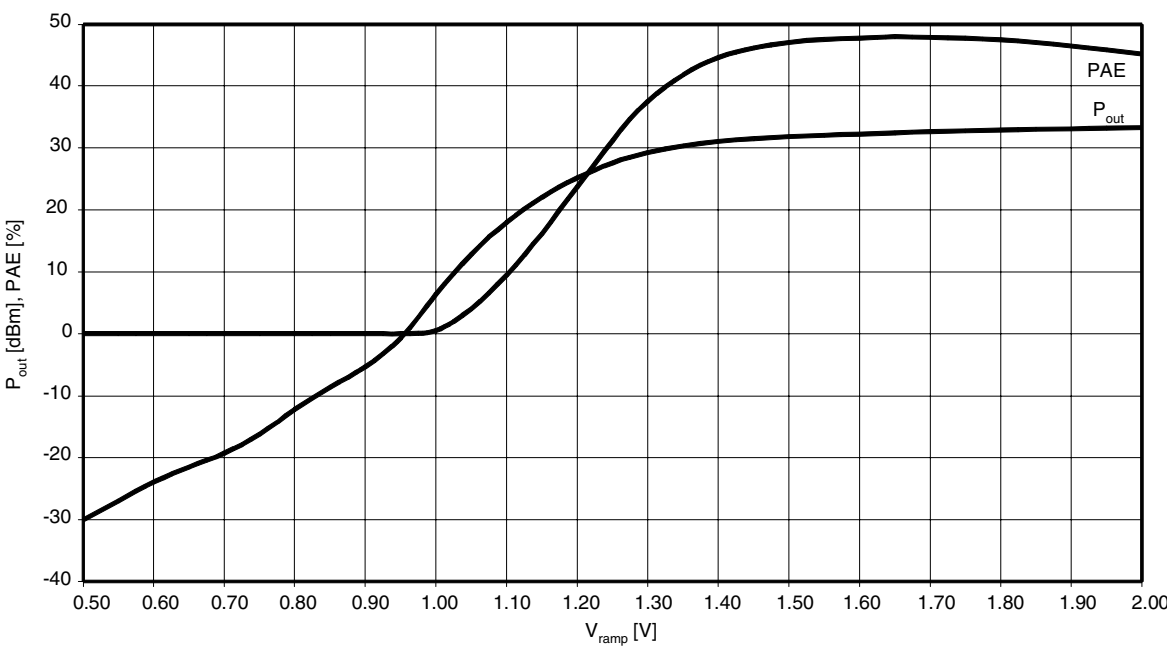

Application Circuit

Figure 7. Application Circuit GSM Pager (900 MHz)

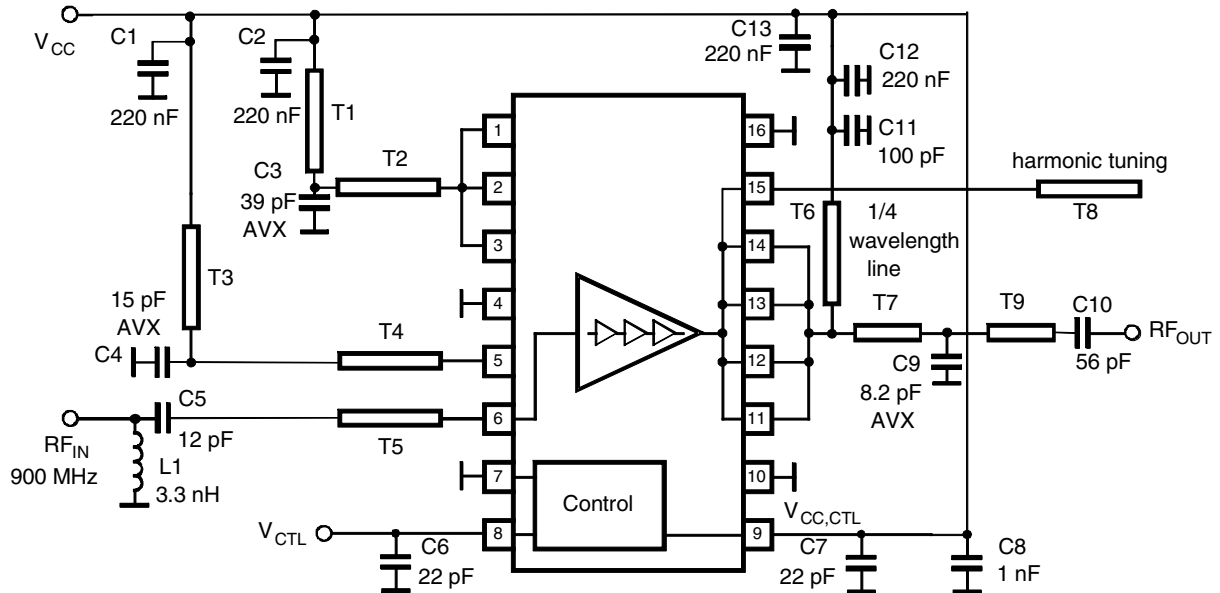

Microstrip line : FR4 ; Epsilon(r) : 4.3 ; metal Cu : 35 μ m
distance 1. layer -rf ground : 0.5 mm

	l/mm	x	w/mm		l/mm	x	w/mm
T1	20.5	x	1.0	T6	43.1	x	0.5
T2	1.3	x	1.0	T7	6.0	x	1.25
T3	14.8	x	0.5	T8	10.0	x	0.5
T4	14.2	x	0.5	T9	4.0	x	1.25
T5	2.5	x	1.0				


Ordering Information

Extended Type Number	Package	Remarks
T0930-TJT	PSSOP16	Tube
T0930-TJQ	PSSOP16	Taped and reeled

Package Information

Package PSSOP16

Dimensions in mm

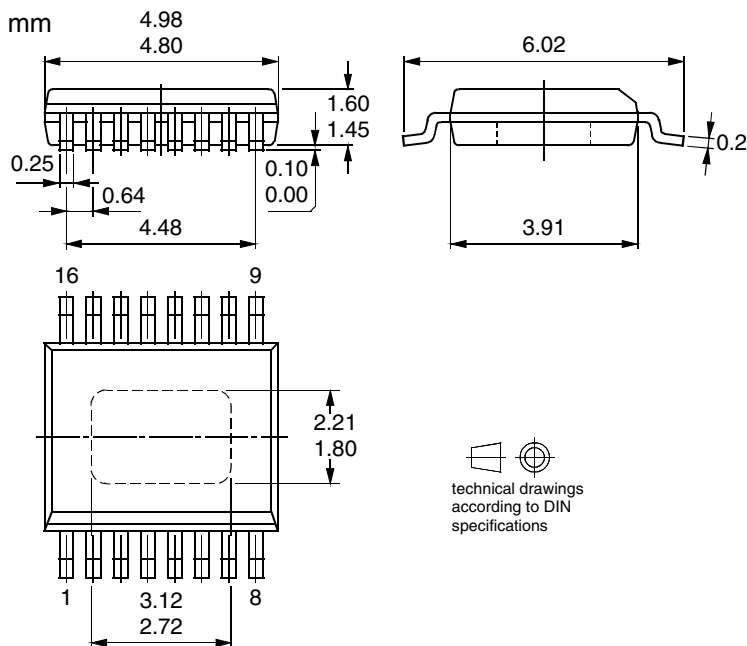



Atmel Corporation

2325 Orchard Parkway
San Jose, CA 95131
Tel: 1(408) 441-0311
Fax: 1(408) 487-2600

Regional Headquarters

Europe

Atmel Sarl
Route des Arsenaux 41
Case Postale 80
CH-1705 Fribourg
Switzerland
Tel: (41) 26-426-5555
Fax: (41) 26-426-5500

Asia

Room 1219
Chinachem Golden Plaza
77 Mody Road Tsimshatsui
East Kowloon
Hong Kong
Tel: (852) 2721-9778
Fax: (852) 2722-1369

Japan

9F, Tonetsu Shinkawa Bldg.
1-24-8 Shinkawa
Chuo-ku, Tokyo 104-0033
Japan
Tel: (81) 3-3523-3551
Fax: (81) 3-3523-7581

Atmel Operations

Memory

2325 Orchard Parkway
San Jose, CA 95131
Tel: 1(408) 441-0311
Fax: 1(408) 436-4314

Microcontrollers

2325 Orchard Parkway
San Jose, CA 95131
Tel: 1(408) 441-0311
Fax: 1(408) 436-4314

La Chantrerie
BP 70602
44306 Nantes Cedex 3, France
Tel: (33) 2-40-18-18-18
Fax: (33) 2-40-18-19-60

ASIC/ASSP/Smart Cards

Zone Industrielle
13106 Rousset Cedex, France
Tel: (33) 4-42-53-60-00
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906
Tel: 1(719) 576-3300
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park
Maxwell Building
East Kilbride G75 0QR, Scotland
Tel: (44) 1355-803-000
Fax: (44) 1355-242-743

RF/Automotive

Theresienstrasse 2
Postfach 3535
74025 Heilbronn, Germany
Tel: (49) 71-31-67-0
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.
Colorado Springs, CO 80906
Tel: 1(719) 576-3300
Fax: 1(719) 540-1759

Biometrics/Imaging/Hi-Rel MPU/

High Speed Converters/RF Datacom

Avenue de Rochepleine
BP 123
38521 Saint-Egreve Cedex, France
Tel: (33) 4-76-58-30-00
Fax: (33) 4-76-58-34-80

e-mail

literature@atmel.com

Web Site

<http://www.atmel.com>

Disclaimer: Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

© Atmel Corporation 2003. All rights reserved.

Atmel® and combinations thereof are the registered trademarks of Atmel Corporation or its subsidiaries.

Other terms and product names may be the trademarks of others.



Printed on recycled paper.