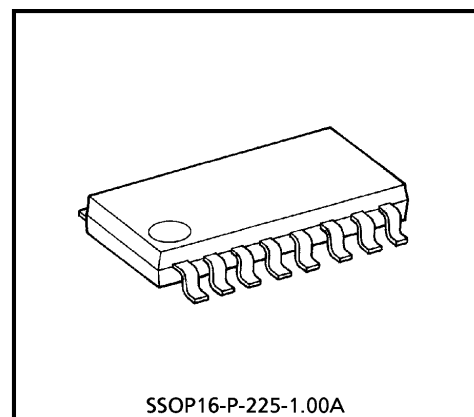


TA8007F

5V VOLTAGE REGULATOR WITH WATCHDOG TIMER

The TA8007F is an IC specially designed for microcomputer systems. It incorporates a highly accurate constant-voltage power supply ($5 \pm 0.15\text{V}$) and various system reset functions. For system reset, it monitors the output voltage of $V_{\text{REG}} \times 92\%$ and has a watchdog timer which can self-diagnose the microcomputer system so that program runaway can be prevented. It also has other monitor functions for checking the operation of the microcomputer system.

Since its standby current is as small as 1.2mA (Max.), it can be connected directly to an automotive battery.



Weight : 0.14g (Typ.)

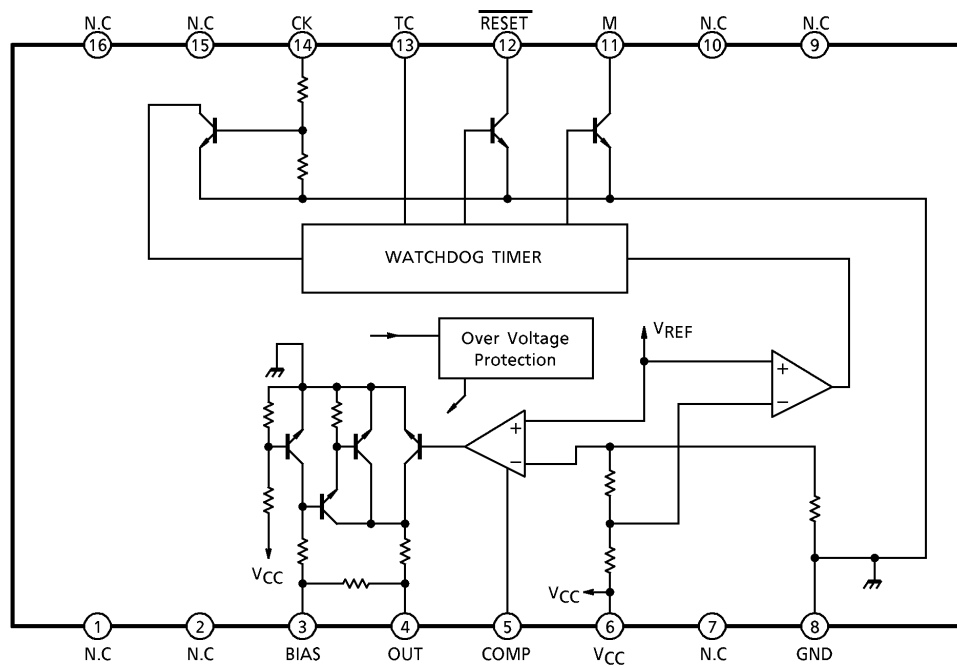
FEATURES

- Accurate output : $5 \pm 0.15\text{V}$
- Low standby current : 1.2mA (Max.)
- Power-on reset timer and watchdog timer incorporated, as well as reset and monitor outputs
- Wide operating voltage range : 35V (Max.)
- Wide operating temperature range : from -40 to 105°C
- Flat package SSOP 16 pin.

961001EBA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury, or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

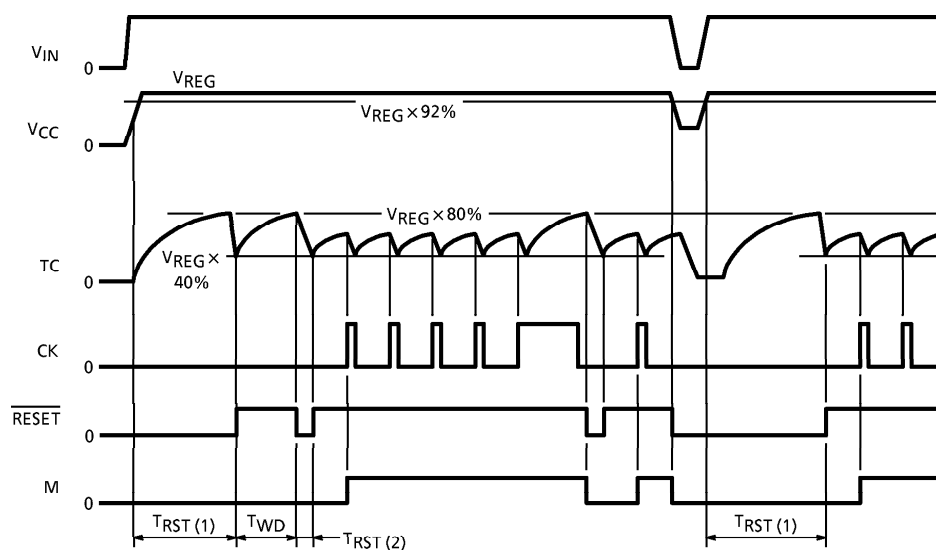
BLOCK DIAGRAM AND PIN LAYOUT



PIN DESCRIPTION

PIN No.	SYMBOL	DESCRIPTION
1, 2	N.C	Not connected.
3	BIAS	Power supply pin for the start-up circuit which activates the overvoltage detection circuit and the 5V power supply.
4	OUT	Connected to the base of an external PNP transistor so that the output voltage is stabilized. Power supply design suitable for particular load capacities is thus possible. Since the recommended maximum I_{OUT} is 5mA, an output current of 300mA is assured if the external transistor has an h_{FE} of 60 or more.
5	COMP	Phase compensation pin for output stabilization.
6	V_{CC}	Power supply pin for the power supply section and reset timers. The output voltage V_{REG} can also be detected at this pin.
7	N.C	Not connected.
8	GND	Grounded
9, 10	N.C	Not connected.
11	M	NPN transistor open-collector output This signal is low while pulses come from pin 12 ($\overline{RESET}$ output) ; it becomes high when pulses no longer come from pin 12. This function can be used for monitoring the operation of the microcomputer system.
12	$\overline{RESET}$	NPN transistor open-collector output. (1) The signal goes low when the output voltage drops below 92%. (2) The pin supplies a reset signal determined by the CR combination connected to the TC pin. (3) The pin supplies reset pulses intermittently if no clock is given to the CK pin.
13	TC	Time setting pin for the reset and watchdog timers. The resistor R_T leads to V_{CC} , and the capacitor C_T leads to GND.
14	CK	Input pin for watchdog timer. The pin is pulled up to V_{CC} if the IC is used only as a power-on reset timer.
15, 16	N.C	Not connected.

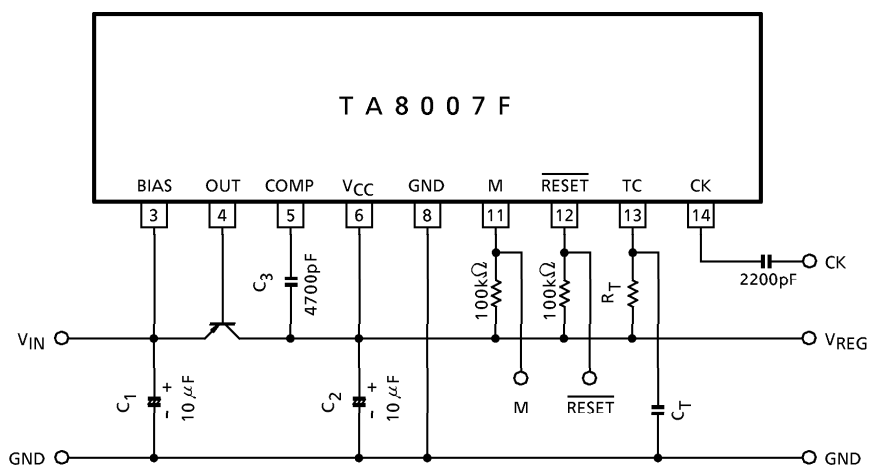
TIMING CHART

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	PIN	RATING	UNIT
Input Voltage	V_{IN1}	BIAS	60 (1s)	V
	V_{IN2}	CK	-5~ V_{CC}	
Output Current	I_{OUT1}	OUT	10	mA
	I_{OUT2}	$\overline{RESET}$, M	2	
Output Voltage	V_{OUT1}	OUT	60 (1s)	V
	V_{OUT2}	$\overline{RESET}$	16	
Power Dissipation	P_D	—	600	mW
Operating Temperature	T_{opr}	—	-40~105	$^\circ\text{C}$
Storage Temperature	T_{stg}	—	-55~150	$^\circ\text{C}$
Lead Temperature-time	T_{sol}	—	260 (10s)	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($V_{IN} = 6 \sim 18V$, $I_{LOAD} = 10mA$, $T_a = -40 \sim 105^\circ C$)

CHARACTERISTIC	SYMBOL	PIN	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_{REG}	V_{CC}	—	—	4.85	5.0	5.15	V
Line Regulation	V_{LINE}	V_{CC}	—	$V_{IN} = 5.5 \sim 35V$	—	0.1	0.5	%
Load Regulation	V_{LOAD}	V_{CC}	—	$I_{LOAD} = 1 \sim 50mA$	—	0.1	0.5	%
Temperature Coefficient	—	V_{CC}	—	—	—	0.01	—	% / $^\circ C$
Output Voltage	V_{OL}	$\overline{RESET}$, M	—	$I_{OL} = 1mA$	—	—	0.5	V
Output Leakage Current	I_{LEAK}	$\overline{RESET}$, M	—	$V_{OUT} = 10V$	—	—	5	μA
Input Current	I_{IN}	TC	—	$V_{IN} = 0 \sim 3.5V$	-3	—	3	μA
Threshold Voltage	V_{IH}	TC	—	—	—	$V_{REG} \times 80\%$	—	V
	V_{IL}		—	—	—	$V_{REG} \times 40\%$	—	
Input Current	I_{IN}	CK	—	$V_{IN} = 5V$	—	0.14	0.3	mA
Input Voltage	V_{IH}	CK	—	—	2	—	—	V
	V_{IL}		—	—	—	—	0.5	
Reset Detect Voltage	—	V_{CC}	—	—	$V_{REG} \times 89\%$	$V_{REG} \times 92\%$	$V_{REG} \times 95\%$	V
Standby Current	I_{ST}	V_{CC}	—	$V_{IN} = 14V$	—	0.6	1.2	mA
Overvoltage Detection	V_{SD}	BIAS	—	—	—	40	—	V
Watchdog Timer	T_{WD}	$\overline{RESET}$	—	—	$0.9 \times C_{TRT}$	$1.1 \times C_{TRT}$	$1.3 \times C_{TRT}$	—
Reset Timer (1)	$T_{RST} (1)$	$\overline{RESET}$	—	—	$1.3 \times C_{TRT}$	$1.6 \times C_{TRT}$	$1.9 \times C_{TRT}$	—
Reset Timer (2)	$T_{RST} (2)$	$\overline{RESET}$	—	—	$300 \times C_T$	$700 \times C_T$	$1500 \times C_T$	—
Clock Pulse Width	T_W	CK	—	—	3	—	—	μs

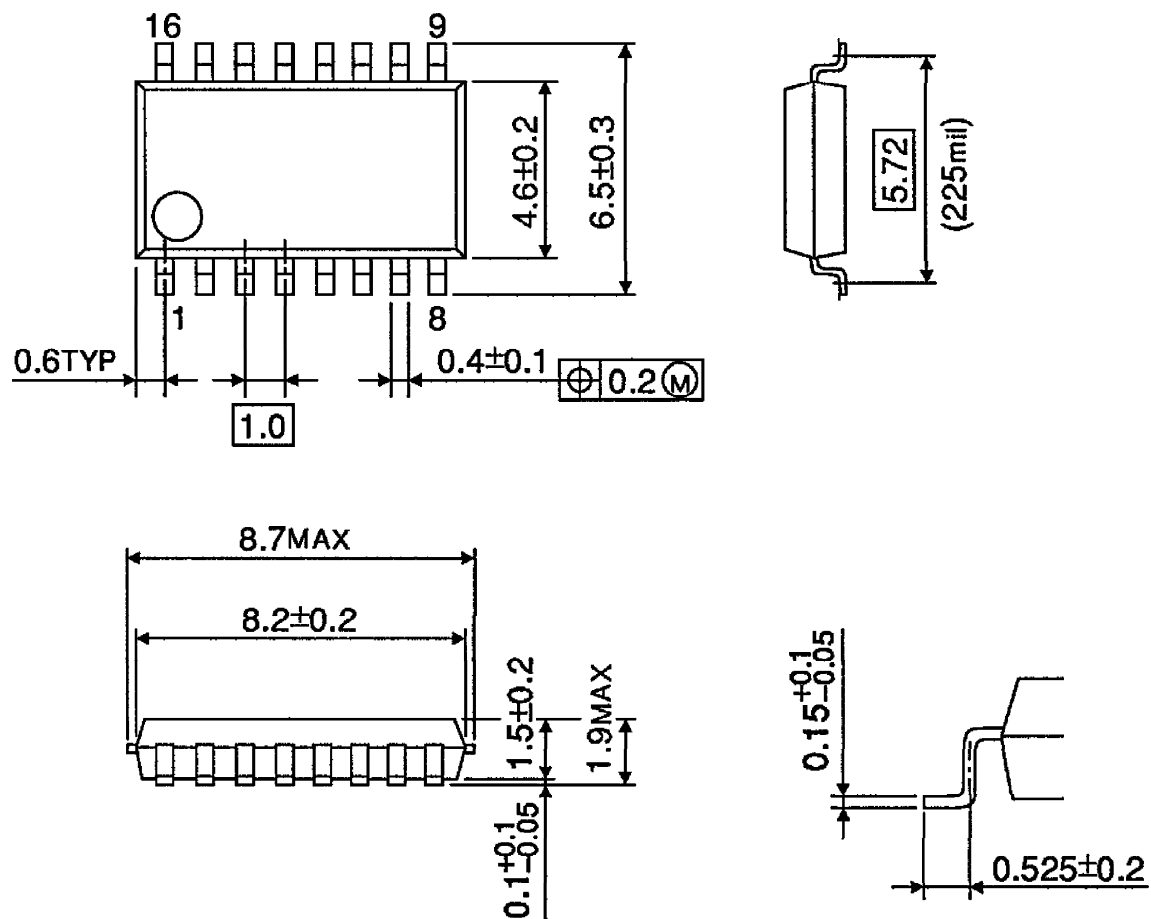
EXAMPLE OF APPLICATION CIRCUIT

(*) Cautions for Wiring

1. C_1 and C_2 are for absorbing disturbance, noise, etc. Connect them as close to the IC as possible.
2. C_3 is for phase compensation. Also, connect C_3 close to the IC.

OUTLINE DRAWING

SSOP16-P-225-1.00A

Unit : mm



Weight : 0.14g (Typ.)