

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0876313001](#)
Status: **Active**
Overview: [extreme_powerplus_ssi](#)
Description: 6.35mm (.250") Pitch Power, 2.54mm (.100") Pitch Signal, EXTreme PowerPlus™ P-S-P Header, Through Hole, Right Angle, Short Contacts, 30 Circuits, Power Alpha 6, Signal 20, Power Beta 4, Recessed Signal Pin C2, Lead-free

Documents:
[3D Model](#) [Product Specification PS-87631-006 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
TUV R50078473

General

Product Family PCB Headers
Series [87631](#)
Application Board-to-Board
Comments Short Contacts|Recessed Signal Pin: C2
Overview [extreme_powerplus_ssi](#)
Product Name EXTreme PowerPlus™

Physical

Breakaway No
Circuits (Loaded) 30
Circuits Detail Power Alpha 6, Signal 20, Power Beta 4
Color - Resin Black
Durability (mating cycles max) 100
First Mate / Last Break Yes
Flammability 94V-0
Glow-Wire Compliant No
Guide to Mating Part Yes
Keying to Mating Part Yes
Lock to Mating Part Yes
Material - Metal Copper Alloy
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Number of Rows 4
Orientation Right Angle
PC Tail Length (in) 0.135 In
PC Tail Length (mm) 3.43 mm
PCB Locator Yes
PCB Retention Yes
PCB Thickness Recommended (in) 0.062 In
PCB Thickness Recommended (mm) 1.60 mm
Packaging Type Tray
Pitch - Mating Interface (in) 0.100 In, 0.250 In
Pitch - Mating Interface (mm) 2.54 mm, 6.35 mm
Plating min: Mating (µin) 30
Plating min: Mating (µm) 0.76
Plating min: Termination (µin) 100
Plating min: Termination (µm) 2.54
Polarized to Mating Part Yes
Polarized to PCB Yes

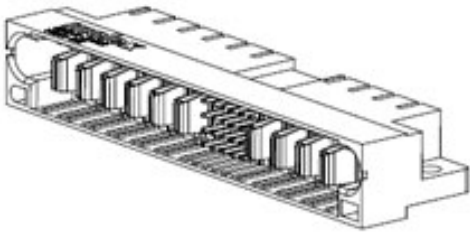


image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[87631Series](#)

Mates With
[87633](#) Vertical Press-Fit Receptacle. [87622](#)
Vertical Through Hole Receptacle. [87632](#)
Right Angle Through Hole Receptacle

Shrouded	Fully
Stackable	No
Temperature Range - Operating	-20°C to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	2.5A, 30A
Voltage - Maximum	250V DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	SMC & Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260


Material Info


Reference - Drawing Numbers

Application Specification	AS-87631-018
Product Specification	PS-87631-006
Sales Drawing	SD-87631-013


This document was generated on 05/25/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

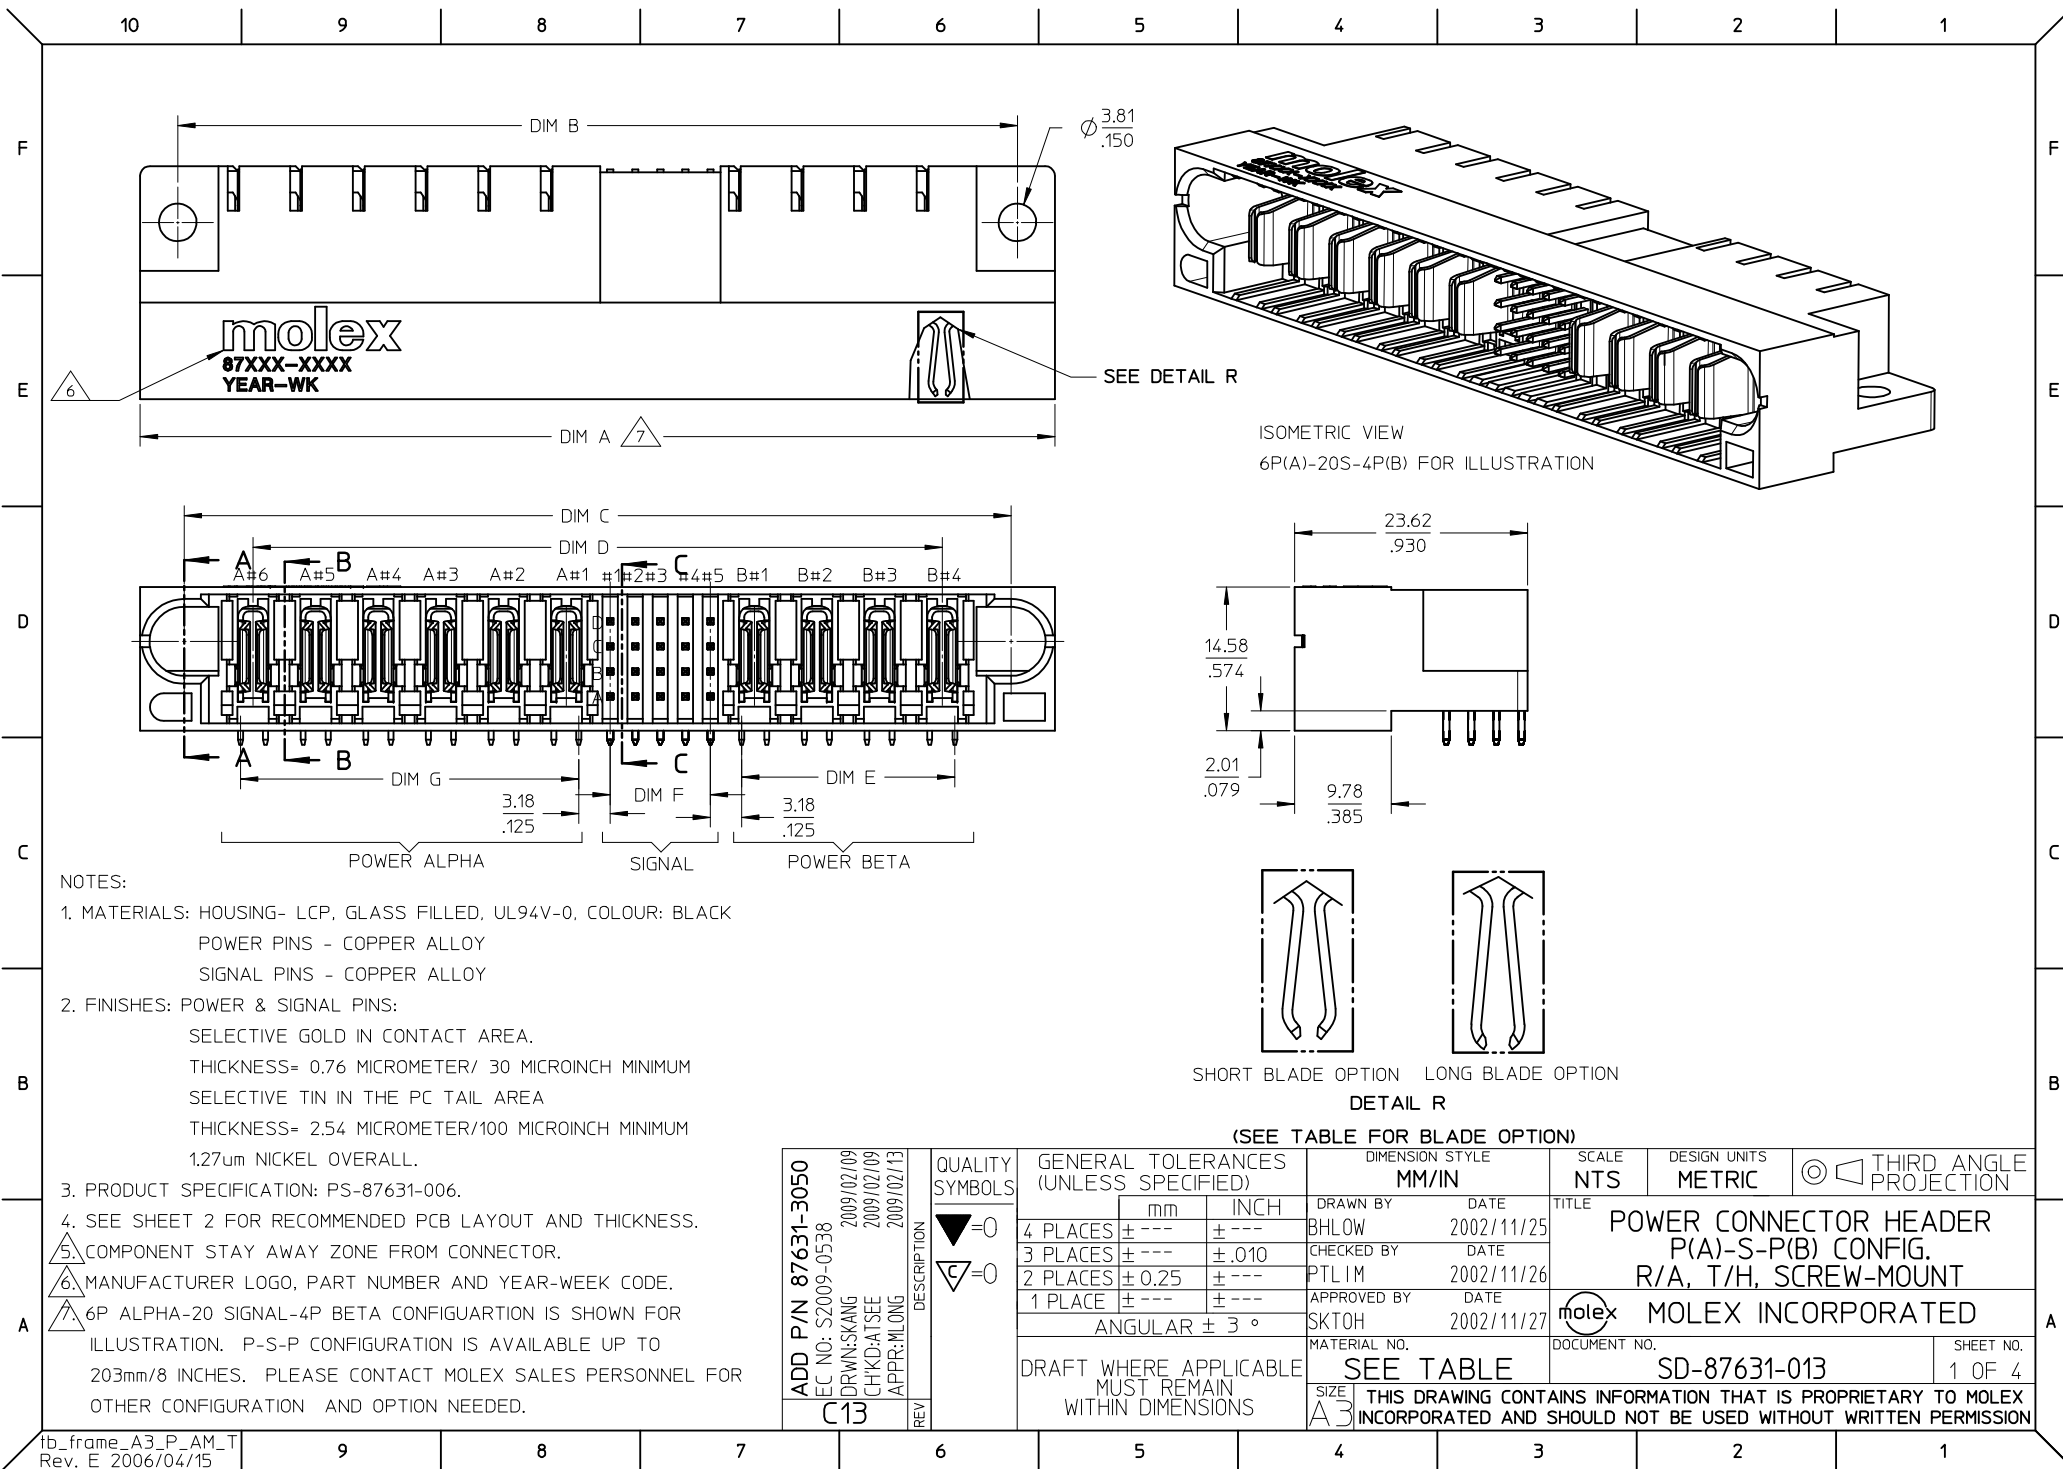


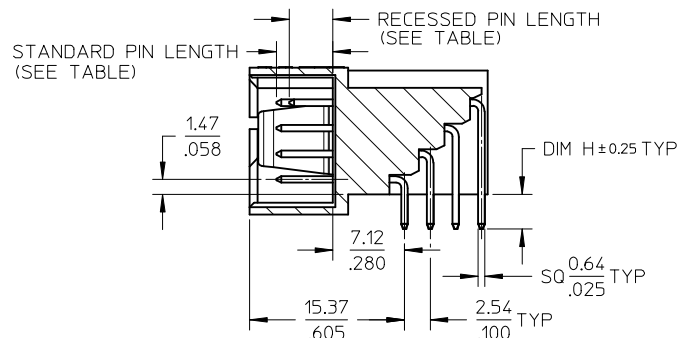


SECTION C-C

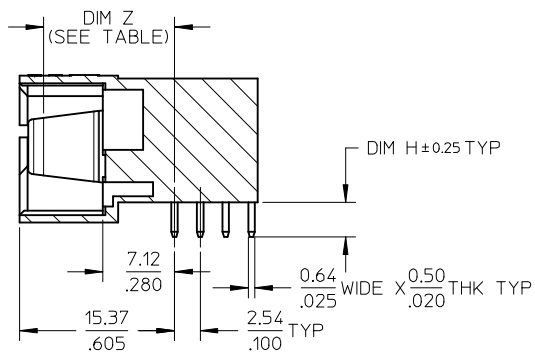

SECTION B-B

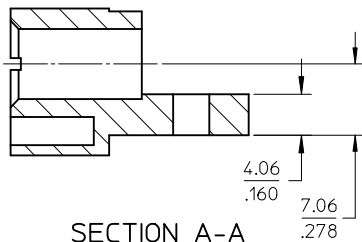

SECTION A-A

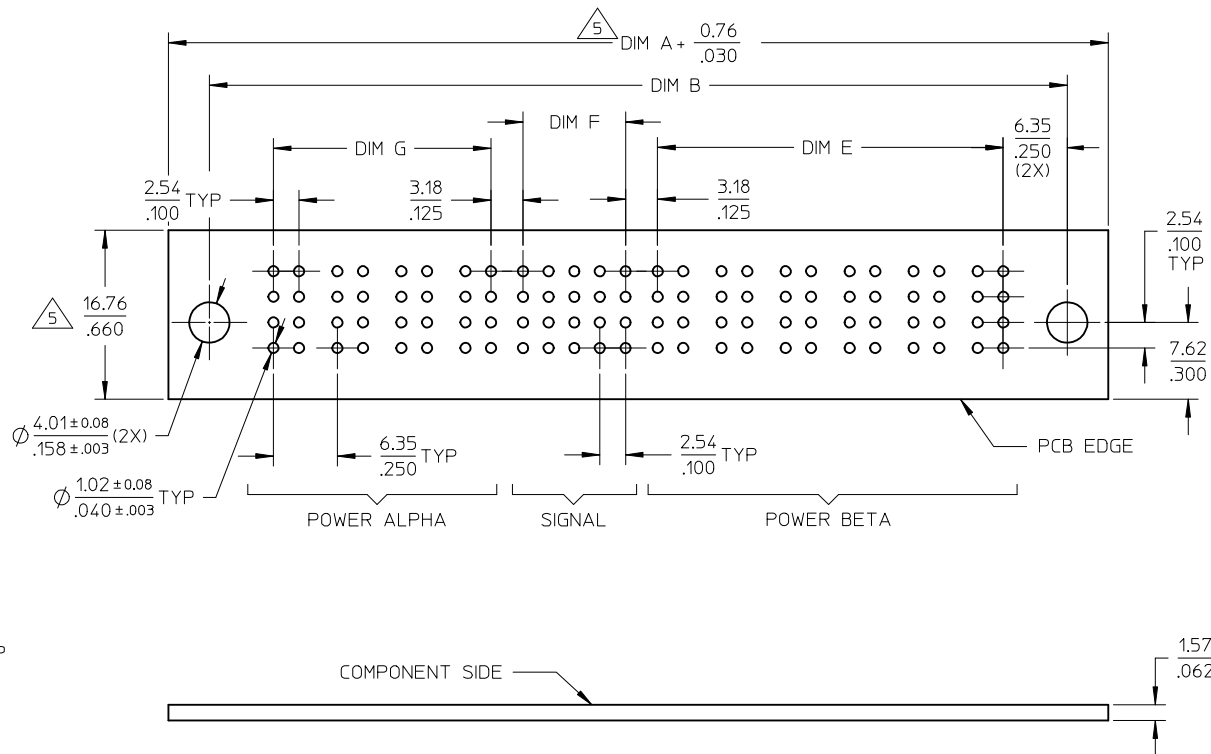

RECOMMENDED PCB LAYOUT

ADD P/N 87631-3050 EC NO: S2009-0538 DRWN:SKANG CHKD:ATSEE APPR:MLONG 2009/02/09 2009/02/09 2009/02/13	DESCRIPTION	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY BHLW	DATE 2002/11/25	TITLE POWER CONNECTOR HEADER P(A)-S-P(B) CONFIG. R/A, T/H, SCREW-MOUNT				
			4 PLACES	± ---	± ---	CHECKED BY	DATE					
			3 PLACES	± ---	± .010	PTLIM	2002/11/26	MOLEX INCORPORATED				
			2 PLACES	± 0.25	± ---	APPROVED BY	DATE					
1 PLACE	± ---	± ---	SKTOH	2002/11/27	DOCUMENT NO.		SD-87631-013		SHEET NO. 2 OF 4			
C13	REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		SEE TABLE					
					SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

	10			9			8			7			6			5			4			3			2			1			
	PART NUMBER	P-S-P CONFIGURATION			DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	POWER BLADE OPTIONS			STANDARD SIGNAL	RECESSED SIGNAL PIN		VOID SIGNAL LOCATION	PACKAGING											
		POWER ALPHA	SIGNAL	POWER BETA									TYPE	DIM Z ±0.13/.005	PIN LENGTH	LENGTH	LOCATION														
F	87631-3000	3	24	5	82.54 3.250	74.93 2.950	73.65 2.900	59.69 2.350	27.94 1.100	12.70 .500	15.24 .600	3.43 .135	SHORT CONTACT	13.32 / .524	5.59 / .220	4.32/.170	NIL	TRAY	F												
	87631-3001	6	20	4	92.71 3.650	85.10 3.350	83.82 3.300	69.86 2.750	21.59 .850	10.16 .400	34.29 1.350					C2	TRAY														
	87631-3002	4	24	4	82.54 3.250	74.93 2.950	73.65 2.900	59.69 2.350	21.59 .850	12.70 .500	21.59 .850					A1	TRAY														
	87631-3003	3	24	3	69.84 2.750	62.23 2.450	60.95 2.400	46.99 1.850	15.24 .600	12.70 .500	15.24 .600					NIL	TRAY														
E	87631-3004	2	24	2	57.15 2.250	49.53 1.950	48.26 1.900	34.29 1.350	8.89 .350	12.70 .500	8.89 .350						NIL	TRAY	E												
	87631-3006	2	32	2	62.23 2.450	54.61 2.150	53.34 2.100	39.37 1.550	8.89 .350	17.78 .700	8.89 .350					NIL	TRAY														
	87631-3008	2	24	2	57.15 2.250	49.53 1.950	48.26 1.900	34.29 1.350	8.89 .350	12.70 .500	8.89 .350					B4	TRAY														
	87631-3009	2	24	4	69.84 2.750	62.23 2.450	60.95 2.400	46.99 1.850	21.59 .850	12.70 .500	8.89 .350					B4	TRAY														
D	87631-3010	4	24	6	95.24 3.750	87.63 3.450	86.35 3.400	72.39 2.850	34.29 1.350	12.70 .500	21.59 .850						B4	TRAY	D												
	87631-3011	6	24	5	101.59 4.000	93.98 3.700	92.70 3.650	78.74 3.100	27.94 1.100	12.70 .500	34.29 1.350					A3, B6, C3, D5															
	87631-3013	4	24	2	69.84 2.750	62.23 2.450	60.95 2.400	46.99 1.850	8.89 .350	12.70 .500	21.59 .850		↓	↓	↓	↓	C1														
	87631-3020	1	16	1	39.37 1.550	31.75 1.250	30.48 1.200	16.51 .650	2.54 .100	7.62 .300	2.54 .100		LONG CONTACT	14.12 / .556	6.86 / .270	5.59/.220	B1			NIL											
C	87631-3015	4	20	4	80.00 3.150	72.39 2.850	71.11 2.800	57.15 2.250	21.59 .850	10.16 .400	21.59 .850						B3	TRAY	C												
	87631-3021	6	24	5	101.59 4.000	93.98 3.700	92.70 3.650	78.74 3.100	27.94 1.100	12.70 .500	34.29 1.350					A3, B6, C3, D5															
	87631-3022	2	12	2	49.53 1.950	41.91 1.650	40.64 1.600	26.67 1.050	8.89 .350	5.08 .200	8.89 .350					B2 C3															
	87631-3023	2	12	2	49.53 1.950	41.91 1.650	40.64 1.600	26.67 1.050	8.89 .350	5.08 .200	8.89 .350	2.34 .092					B1 C3														
B	87631-3024	1	12	1	36.83 1.450	29.21 1.150	27.94 1.100	13.97 5.50	2.54 .100	5.08 .200	2.54 .100	3.43 .135					NIL	TRAY	B												
	87631-3028	2	24	2	57.15 2.250	49.53 1.950	48.26 1.900	34.29 1.350	8.89 .350	12.70 .500	8.89 .350	3.43 .135					C6														
	87631-3031	4	24	2	69.84 2.750	62.23 2.450	60.95 2.400	46.99 1.850	8.89 .350	12.70 .500	21.59 .850	3.43 .135					C1														
	87631-3037	3	24	3	69.84 2.750	62.23 2.450	60.95 2.400	46.99 1.850	15.24 .600	12.70 .500	15.24 .600	3.43 .135					ALL EXCEPT A6,B1,C1	TRAY													
	87631-3038	4	16	2	64.77 2.550	57.16 2.250	55.88 2.200	41.92 1.650	8.89 .350	7.62 .300	21.59 .850	3.43 .135					A1,A2,A4,B1,B3 C2,C4,D1,D2,D3,D4														
	87631-3041	2	24	2	57.15 2.250	49.53 1.950	48.26 1.900	34.29 1.350	8.89 .350	12.70 .500	8.89 .350	3.43 .135		↓	↓	↓	↓			C3											

A	ADD P/N 87631-3050 EC NO: S2009-0538 DRWN:SKANG CHKD:ATSEE APPR:MLONG	2009/02/09 2009/02/09 2009/02/13	DESCRIPTION	REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		POWER CONNECTOR HEADER P(A)-S-P(B) CONFIG. R/A, T/H, SCREW-MOUNT MOLEX INCORPORATED	SD-87631-013	SHEET NO. 3 OF 4	
								MM/IN		NTS	METRIC						
								DRAWN BY	DATE	TITLE							
								CHECKED BY	DATE								
								PTL IM	2002/11/26								
								APPROVED BY	DATE								
								SKTOH	2002/11/27								
								MATERIAL NO.			DOCUMENT NO.						
								SEE TABLE									
								DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									
		SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
		A3															

10			9			8			7			6			5			4			3			2			1		
PART NUMBER	P-S-P CONFIGURATION			DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	POWER BLADE OPTIONS		STANDARD SIGNAL PIN LENGTH	RECESSED SIGNAL LENGTH	SIGNAL PIN LOCATION	VOID SIGNAL LOCATION	PACKAGING											
	POWER ALPHA	SIGNAL	POWER BETA									TYPE	DIM Z ±0.13/.005																
F	87631-3042	2	16	2	<u>52.07</u> 2.050	<u>44.45</u> 1.750	<u>43.18</u> 1.700	<u>29.21</u> 1.150	<u>8.89</u> .350	<u>7.62</u> .300	<u>8.89</u> .350	<u>3.43</u> .135	LONG CONTACT	14.12 / .556	6.86 / .270	5.59/.220	B3,C4	NIL	TRAY										
	87631-3043	7	28	7	<u>123.19</u> 4.850	<u>115.57</u> 4.550	<u>114.30</u> 4.500	<u>100.33</u> 3.950	<u>40.64</u> 1.600	<u>15.24</u> .600	<u>40.64</u> 1.600	<u>3.43</u> .135	LONG CONTACT	14.12 / .556	6.86 / .270	5.59/.220	B4,C4		TRAY										
	87631-3044	7	28	7	<u>123.19</u> 4.850	<u>115.57</u> 4.550	<u>114.30</u> 4.500	<u>100.33</u> 3.950	<u>40.64</u> 1.600	<u>15.24</u> .600	<u>40.64</u> 1.600	<u>3.43</u> .135	LONG CONTACT	14.12 / .556	6.86 / .270	5.59/.220	NIL		TRAY										
E	87631-3045	6	28	4	<u>97.79</u> 3.850	<u>90.17</u> 3.550	<u>88.90</u> 3.500	<u>74.93</u> 2.950	<u>21.59</u> .850	<u>15.24</u> .600	<u>34.29</u> 1.350	<u>3.43</u> .135	LONG CONTACT	14.12 / .556	6.86 / .270	5.59/.220	A1	A7,B7,C7,D7	TRAY										
	87631-3046	6	24	4	<u>95.25</u> 3.750	<u>87.63</u> 3.450	<u>86.36</u> 3.400	<u>72.39</u> 2.850	<u>21.59</u> .850	<u>12.70</u> .500	<u>34.29</u> 1.350	<u>3.43</u> .135	LONG CONTACT	14.12 / .556	6.86 / .270	5.59/.220	A1	NIL	TRAY										
	87631-3047	2	24	2	<u>57.15</u> 2.250	<u>49.53</u> 1.950	<u>48.26</u> 1.900	<u>34.29</u> 1.350	<u>8.89</u> .350	<u>12.70</u> .500	<u>8.89</u> .350	<u>3.43</u> .135	LONG CONTACT	14.12 / .556	6.86 / .270	5.59/.220	A6,B6,C6,D6		TRAY										
	87631-3048	2	16	2	<u>52.07</u> 2.050	<u>44.45</u> 1.750	<u>43.18</u> 1.700	<u>29.21</u> 1.150	<u>8.89</u> .350	<u>7.62</u> .300	<u>8.89</u> .350	<u>3.43</u> .135	LONG CONTACT	14.12 / .556	6.86 / .270	5.59/.220	A2,D4	A1,B2,C2,D1	TRAY										
D	87631-3049	4	24	4	<u>82.54</u> 3.250	<u>74.93</u> 2.950	<u>73.65</u> 2.900	<u>59.69</u> 2.350	<u>21.59</u> .850	<u>12.70</u> .500	<u>21.59</u> .850	<u>3.43</u> .135	LONG CONTACT	14.12 / .556	6.86 / .270	5.59/.220	A6	NIL	TRAY										
	87631-3050	2	24	2	<u>57.15</u> 2.250	<u>49.53</u> 1.950	<u>48.26</u> 1.900	<u>34.29</u> 1.350	<u>8.89</u> .350	<u>12.70</u> .500	<u>8.89</u> .350	<u>3.43</u> .135	LONG CONTACT	14.12 / .556	6.86 / .270	5.59/.220	A5	NIL	TRAY										
</																													