
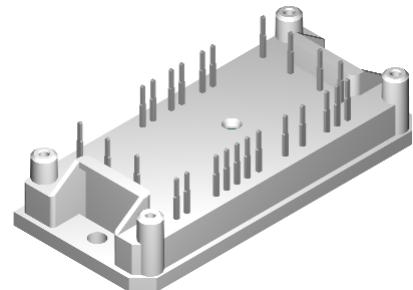


# Converter - Brake - Inverter Module (CBI1)

NPT IGBT

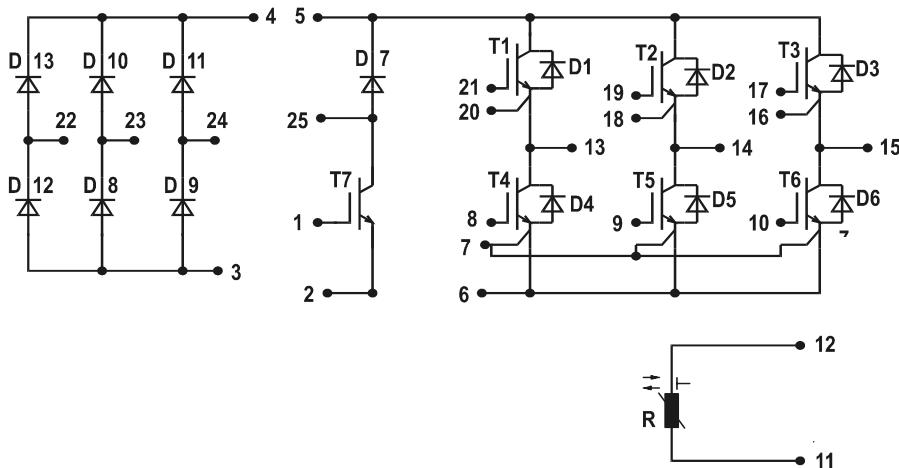

Three Phase Rectifier	Brake Chopper	Three Phase Inverter
$V_{RRM} = 1600V$	$V_{CES} = 600 V$	$V_{CES} = 600 V$
$I_{DAVM25} = 130 A$	$I_{C25} = 25 A$	$I_{C25} = 42 A$
$I_{FSM} = 320 A$	$V_{CE(sat)} = 2.0 V$	$V_{CE(sat)} = 2.3 V$

## Input Rectifier Bridge D8 - D13

Symbol	Conditions	Maximum Ratings		
$V_{RRM}$		1600		V
$I_{FAV}$	$T_c = 80^\circ C$ ; sine $180^\circ$	31		A
$I_{DAVM}$	bridge output current; $T_c = 80^\circ C$ ; rect.; $d = 1/3$	89		A
$I_{FSM}$	$T_{VJ} = 25^\circ C$ ; $t = 10$ ms; sine 50 Hz	320		A
$P_{tot}$	$T_c = 25^\circ C$	80		W

Symbol	Conditions	Characteristic Values			
		( $T_{VJ} = 25^\circ C$ , unless otherwise specified)	min.	typ.	max.
$V_F$	$I_F = 30 A$ ; $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		1.0	1.35	V
			1.1		V
$I_R$	$V_R = V_{RRM}$ ; $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		0.4	0.02	mA
					mA
$R_{thJC}$	(per diode)			1.4	kW
$R_{thCH}$			0.45		kW

## Application: AC motor drives with

- Input from single or three phase grid
- Three phase synchronous or asynchronous motor
- electric braking operation

## Features

- High level of integration - only one power semiconductor module required for the whole drive
- Inverter with NPT IGBTs
  - low saturation voltage
  - positive temperature coefficient
  - fast switching
  - short tail current
- Epitaxial free wheeling diodes with hiperfast and soft reverse recovery
- Industry standard package with insulated copper base plate and soldering pins for PCB mounting
- Temperature sense included

**Output Inverter T1 - T6**


Symbol	Conditions	Maximum Ratings		
$V_{CES}$	$T_{VJ} = 25^\circ C$ to $150^\circ C$	600		V
$V_{GES}$	Continuous	$\pm 20$		V
$V_{GEM}$	Transient	$\pm 30$		V
$I_{C25}$	$T_C = 25^\circ C$	42		A
$I_{C80}$	$T_C = 80^\circ C$	29		A
<b>RBSOA</b>	$V_{GE} = \pm 15 V$ ; $R_G = 33 \Omega$ ; $T_{VJ} = 125^\circ C$ Clamped inductive load; $L = 100 \mu H$	$I_{CM} = 60$		A
$t_{sc}$ <b>(SCSOA)</b>	$V_{CE} = 600 V$ ; $V_{GE} = \pm 15 V$ ; $R_G = 33 \Omega$ ; $T_{VJ} = 125^\circ C$ non-repetitive	10		$\mu s$
$P_{tot}$	$T_C = 25^\circ C$	130		W

Symbol	Conditions	Characteristic Values		
		( $T_{VJ} = 25^\circ C$ , unless otherwise specified)	min.	typ.
$V_{CE(sat)}$	$I_C = 35 A$ ; $V_{GE} = 15 V$ ; $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		2.3	2.7
			2.6	V
$V_{GE(th)}$	$I_C = 0.7 mA$ ; $V_{GE} = V_{CE}$	4.5		6.5
$I_{CES}$	$V_{CE} = V_{CES}$ ; $V_{GE} = 0 V$ ; $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		1.5	0.75
				mA
$I_{GES}$	$V_{CE} = 0 V$ ; $V_{GE} = \pm 20 V$		200	nA
$t_{d(on)}$	Inductive load, $T_{VJ} = 125^\circ C$ $V_{CE} = 300 V$ ; $I_C = 30 A$ $V_{GE} = \pm 15 V$ ; $R_G = 33 \Omega$	50		ns
$t_r$		50		ns
$t_{d(off)}$		270		ns
$t_f$		40		ns
$E_{on}$		1.4		mJ
$E_{off}$		1.0		mJ
$C_{ies}$	$V_{CE} = 25 V$ ; $V_{GE} = 0 V$ ; $f = 1 MHz$	1600		pF
$Q_{Gon}$	$V_{CE} = 300 V$ ; $V_{GE} = 15 V$ ; $I_C = 30 A$	95		nC
$R_{thJC}$	(per IGBT)		0.95	K/W
$R_{thCH}$		0.35		K/W

**Output Inverter D1 - D6**

Symbol	Conditions	Maximum Ratings		
$I_{F25}$	$T_C = 25^\circ C$	69		A
$I_{F80}$	$T_C = 80^\circ C$	46		A

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$V_F$	$I_F = 35 A$ ; $V_{GE} = 0 V$ ; $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		1.7	V
			1.2	V
$t_{rr}$	$I_F = 50 A$ ; $dI_F/dt = -100 A/\mu s$ ; $T_{VJ} = 125^\circ C$ $V_R = 100 V$ ; $V_{GE} = 0 V$	5		A
		100		ns
$R_{thJC}$	(per diode)		0.9	K/W
$R_{thCH}$		0.3		K/W

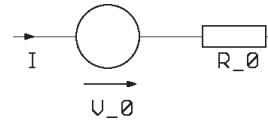**Equivalent Circuits for Simulation****Conduction****D8 - D13**

Rectifier Diode (typ. at  $T_J = 125^\circ C$ )  
 $V_o = 0.90 V$ ;  $R_o = 9 m\Omega$

**T1 - T6 / D1 - D6**


IGBT (typ. at  $V_{GE} = 15 V$ ;  $T_J = 125^\circ C$ )  
 $V_o = 1.0 V$ ;  $R_o = 4.0 m\Omega$

Free Wheeling Diode (typ. at  $T_J = 125^\circ C$ )  
 $V_o = 1.05 V$ ;  $R_o = 7 m\Omega$

**T7 / D7**

IGBT (typ. at  $V_{GE} = 15 V$ ;  $T_J = 125^\circ C$ )  
 $V_o = 1.0 V$ ;  $R_o = 70 m\Omega$

Free Wheeling Diode (typ. at  $T_J = 125^\circ C$ )  
 $V_o = 1.25 V$ ;  $R_o = 26 m\Omega$

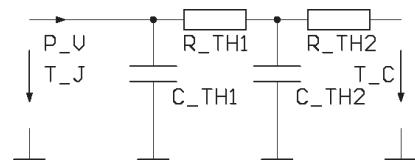**Thermal Response****D8 - D13**

Rectifier Diode (typ.)  
 $C_{th1} = tbd J/K$ ;  $R_{th1} = tbd K/W$   
 $C_{th2} = tbd J/K$ ;  $R_{th2} = tbd K/W$

**T1 - T6 / D1 - D6**

IGBT (typ.)  
 $C_{th1} = tbd J/K$ ;  $R_{th1} = tbd K/W$   
 $C_{th2} = tbd J/K$ ;  $R_{th2} = tbd K/W$

**Free Wheeling Diode (typ.)**

$C_{th1} = tbd J/K$ ;  $R_{th1} = tbd K/W$   
 $C_{th2} = tbd J/K$ ;  $R_{th2} = tbd K/W$

**T7 / D7**

IGBT (typ.)  
 $C_{th1} = tbd J/K$ ;  $R_{th1} = tbd K/W$   
 $C_{th2} = tbd J/K$ ;  $R_{th2} = tbd K/W$

**Free Wheeling Diode (typ.)**

$C_{th1} = tbd J/K$ ;  $R_{th1} = tbd K/W$   
 $C_{th2} = tbd J/K$ ;  $R_{th2} = tbd K/W$

**Brake Chopper T7**

Symbol	Conditions	Maximum Ratings		
$V_{CES}$	$T_{VJ} = 25^\circ C$ to $150^\circ C$	600		V
$V_{GES}$	Continuous	$\pm 20$		V
$V_{GEM}$	Transient	$\pm 30$		V
$I_{C25}$	$T_C = 25^\circ C$	25		A
$I_{C80}$	$T_C = 80^\circ C$	17		A
<b>RBSOA</b>	$V_{GE} = \pm 15 V$ ; $R_G = 68 \Omega$ ; $T_{VJ} = 125^\circ C$ Clamped inductive load; $L = 100 \mu H$	$I_{CM} = 30$ $V_{CEK} \leq V_{CES}$		A
$t_{sc}$ (SCSOA)	$V_{CE} = 600 V$ ; $V_{GE} = \pm 15 V$ ; $R_G = 68 \Omega$ ; $T_{VJ} = 125^\circ C$ non-repetitive	10		$\mu s$
$P_{tot}$	$T_C = 25^\circ C$	80		W
Symbol	Conditions ( $T_{VJ} = 25^\circ C$ , unless otherwise specified)	Characteristic Values		
		min.	typ.	max.
$V_{CE(sat)}$	$I_C = 15 A$ ; $V_{GE} = 15 V$ ; $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$	2.0 2.3	2.4	V
$V_{GE(th)}$	$I_C = 0.4 mA$ ; $V_{GE} = V_{CE}$	4.5	6.5	V
$I_{CES}$	$V_{CE} = V_{CES}$ ; $V_{GE} = 0 V$ ; $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$	0.8	0.5	mA
$I_{GES}$	$V_{CE} = 0 V$ ; $V_{GE} = \pm 20 V$		100	nA
$t_{d(on)}$ $t_r$ $t_{d(off)}$ $t_f$ $E_{on}$ $E_{off}$	Inductive load, $T_{VJ} = 125^\circ C$ $V_{CE} = 300 V$ ; $I_C = 15 A$ $V_{GE} = \pm 15 V$ ; $R_G = 68 \Omega$	30 50 270 40 0.7 0.5		ns ns ns ns mJ mJ
$C_{ies}$ $Q_{Gon}$		800 57		pF nC
$R_{thJC}$ $R_{thCH}$		0.5	1.55	K/W K/W

**Brake Chopper D7**

Symbol	Conditions	Maximum Ratings		
$V_{RRM}$	$T_{VJ} = 25^\circ C$ to $150^\circ C$	600		V
$I_{F25}$	$T_C = 25^\circ C$	21		A
$I_{F80}$	$T_C = 80^\circ C$	14		A
Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$V_F$	$I_F = 15 A$ ; $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$	1.5	2.3	V
$I_R$	$V_R = V_{RRM}$ ; $T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$	0.2	0.06	mA
$I_{RM}$ $t_{rr}$	$I_F = 12 A$ ; $dI_F/dt = -100 A/\mu s$ ; $T_{VJ} = 125^\circ C$ $V_R = 100 V$	3.5 80		A ns
$R_{thJC}$ $R_{thCH}$		0.85	2.5	K/W K/W

## Temperature Sensor NTC

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$R_{25}$	$T = 25^\circ\text{C}$	4.45	4.7	5.0 k $\Omega$
$B_{25/85}$			3510	K

## Module

Symbol	Conditions	Maximum Ratings		
		-	-	-
$T_{VJ}$	Operating	-40...+125	°C	
$T_{JM}$		150	°C	
$T_{stg}$		-40...+125	°C	
$V_{ISOL}$	$I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$	2500	V~	
$M_d$	Mounting torque (M4)	2.0 - 2.2	Nm	

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$d_s$	Creepage distance (towards heatsink)	12.7		mm
$d_A$	Strike distance in air (towards heatsink)	12.7		mm
Weight		40		g

