

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0524371271

Status:

Active

Overview:

Description:

0.50mm (.020") Pitch FFC/FPC Connector, Right Angle, SMT, ZIF, Bottom Contact Style, 12 Circuits, Gold Contact Plating

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

52437Series

Agency Certification

UL

E29179

General

Product Family

FFC/FPC Connectors

Series

52437

Overview

ffc_fpc_smt

Product Name

N/A

Physical

Circuits (Loaded)

12

Color - Resin

Natural

Contact Position

Bottom

Durability (mating cycles max)

20

Entry Angle

90° Angle

Flammability

94V-0

Material - Metal

Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Gold

Material - Resin

High Temperature Thermoplastic

Number of Rows

1

Orientation

Right Angle

PCB Locator

No

PCB Retention

None

Packaging Type

Embossed Tape on Reel

Pitch - Mating Interface (in)

0.020 In

Pitch - Mating Interface (mm)

0.50 mm

Plating min: Mating (µin)

4

Plating min: Mating (µm)

0.1

Plating min: Termination (µin)

2

Plating min: Termination (µm)

0.05

Polarized to PCB

Yes

Stackable

No

Surface Mount Compatible (SMC)

N/A

Temperature Range - Operating

-40°C to +85°C

Termination Interface: Style

Surface Mount

Wire/Cable Type

FFC/FPC

Electrical

Current - Maximum per Contact

0.5A

Voltage - Maximum

50V

Material Info

Reference - Drawing Numbers

Packaging Specification

SPK-52437-001

Product Specification

PS-52437-027, RPS-52437-040, RPS-52437-041, RPS-52437-042, RPS-52437-043, RPS-52437-045, RPS-52437-046

Sales Drawing

SD-52437-019, SD-52437-020

This document was generated on 06/04/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

F

E

D

C

B

A

F


E

D


C

B

A

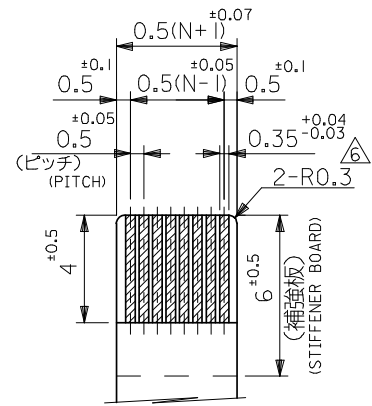


適合FPC推奨寸法
APPLICABLE FPC
RECOMMENDED DIMENSION.
(仕上がり厚さ: 0.3 ±0.05)
(THICKNESS: 0.3 ±0.05)

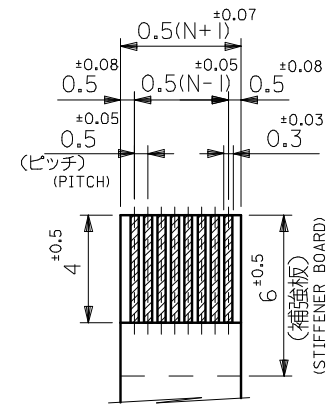

適合FFC推奨寸法
APPLICABLE FFC
RECOMMENDED DIMENSION.
(仕上がり厚さ: 0.3 ±0.05)
(THICKNESS: 0.3 ±0.05)

FPCについて:
打抜き方向は導体側から補強板側を推奨致します。
補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。


ABOUT FPC:
RECOMMENDED PUNCHER DIRECTION :
FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED MATERIAL:
STIFFENER FILM : POLYIMIDE
BONDING AGENT : THERMOSETTING BONDING AGENT

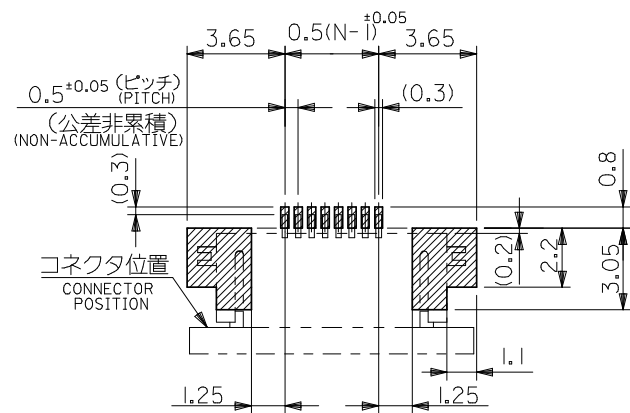

参考基板レイアウト
(マウント面)
RECOMMENDED P.C.B.O.A.R.D
P.A.T.T.E.R.N D.I.M.E.N.S.I.O.N (R.E.F.)
(M.O.U.N.T.I.N.G S.I.D.E)

21.6	19.6	15.65	14.5	52437-3071	52437-3029	30
21.1	19.1	15.15	14.0	52437-2971	52437-2929	29
20.6	18.6	14.65	13.5	52437-2871	52437-2829	28
20.1	18.1	14.15	13.0	52437-2771	52437-2729	27
19.6	17.6	13.65	12.5	52437-2671	52437-2629	26
19.1	17.1	13.15	12.0	52437-2571	52437-2529	25
18.6	16.6	12.65	11.5	52437-2471	52437-2429	24
18.1	16.1	12.15	11.0	52437-2371	52437-2329	23
17.6	15.6	11.65	10.5	52437-2271	52437-2229	22
17.1	15.1	11.15	10.0	52437-2171	52437-2129	21
16.6	14.6	10.65	9.5	52437-2071	52437-2029	20
13.6	11.6	7.65	6.5	52437-1471	52437-1429	14
12.6	10.6	6.65	5.5	52437-1271	52437-1229	12
D	C	B	(A)	EMBOSSED TAPE	MATERIAL NO.	極数
				ORDER No. オーダー番号	MODEL NO. 52437-**29	CKT.

REVISED EC NO: J2008-4048 DRWN:WABEI CHKD:THARUYAMA APPR:NUKITA	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY M.UMEDA	DATE 2004/12/08	TITLE 0.5 FPC CONN.ZIF FOR SMT.RA (BOTTOM CONTACT) -LEAD FREE-				
		10 OVER 30 UNDER	±0.25	CHECKED BY K.TOYOTA	DATE 2004/12/08					
		30 OVER	±0.3	APPROVED BY N.UKITA	DATE 2004/12/08	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-52437-019			SHEET NO. 2 OF 2	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
				SIZE A3						

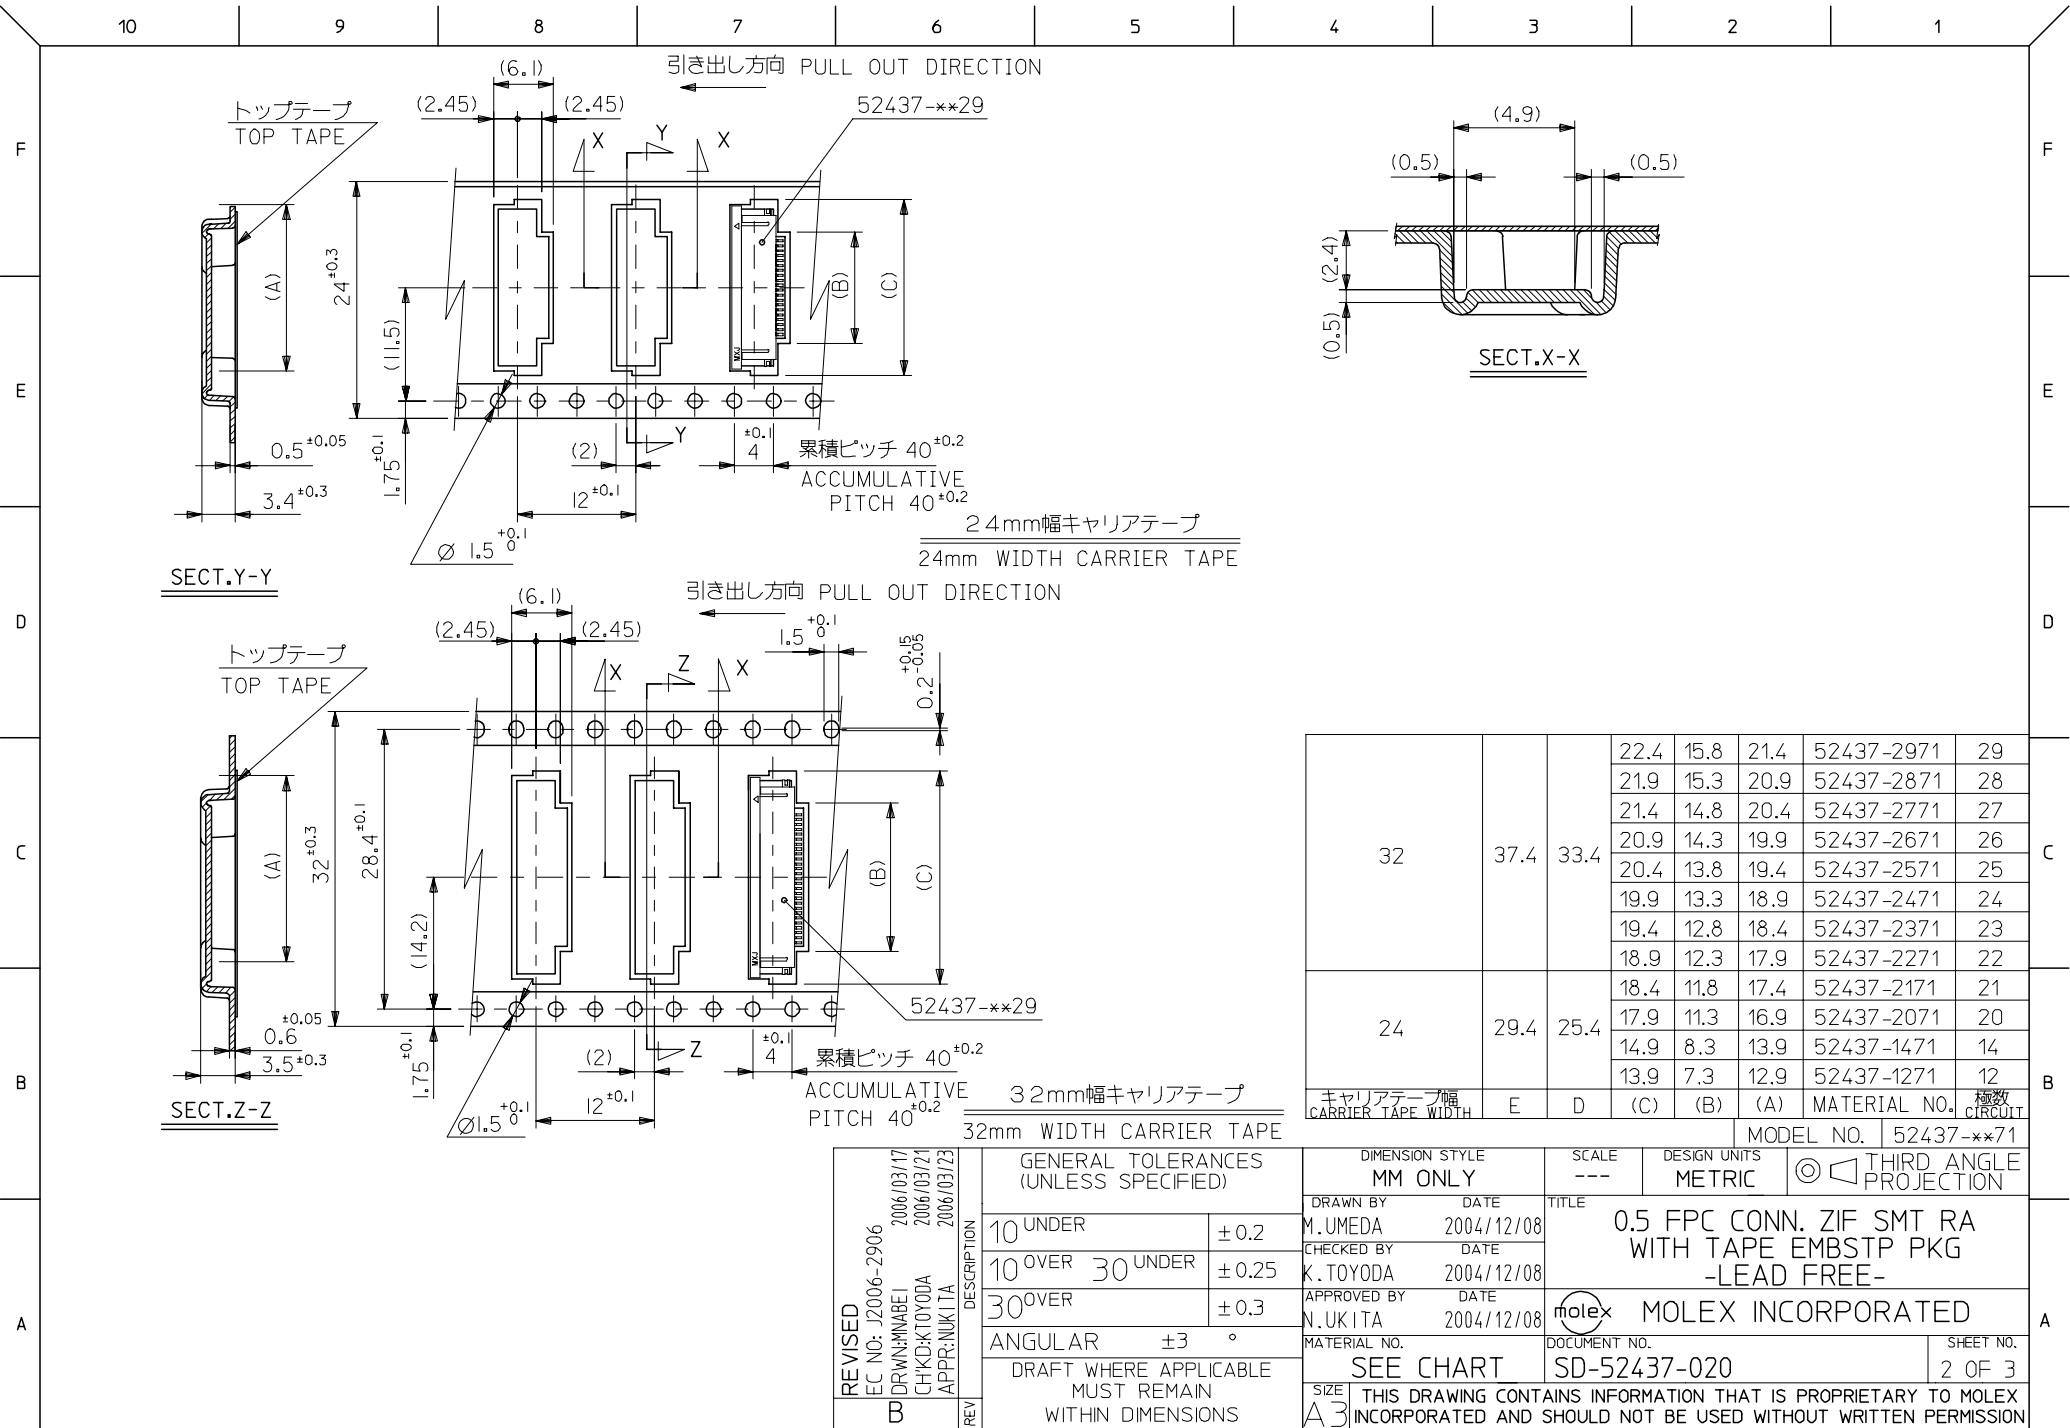



tb_frame_A3_J_ME_S
Rev. D 2004/04/02