
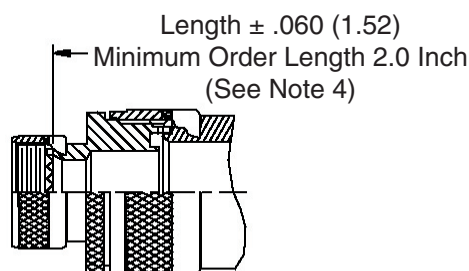



CONNECTOR DESIGNATORS

A-F-H-L-S
SELF-LOCKING
ROTATABLE
COUPLING




TYPE D INDIVIDUAL OR OVERALL SHIELD TERMINATION

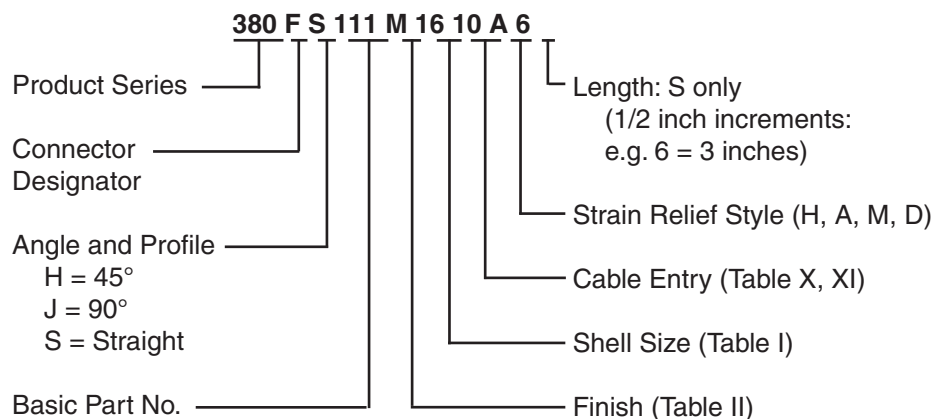


STYLE 2
(STRAIGHT
See Note 1)




STYLE 2
(45° & 90°
See Note 1)

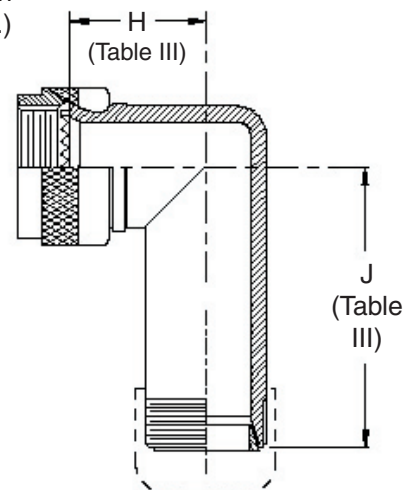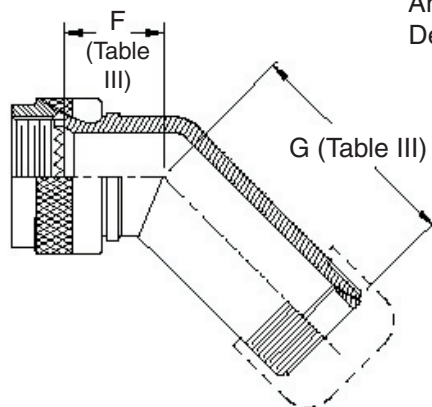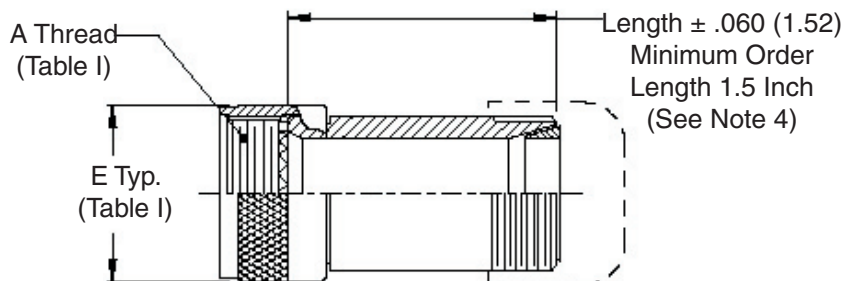


STYLE H
Heavy Duty
(Table X)



STYLE A
Medium Duty
(Table XI)



STYLE M
Medium Duty
(Table XI)



STYLE D
Medium Duty
(Table XI)




TABLE III: ELBOW DIMENSIONS

Shell Size Conn. Desig. A-F-L-S H		F Max	G Max	H Max	J Max
08	09	.795 (20.2)	.940 (23.9)	.906 (23.0)	1.050 (26.7)
10	11	.795 (20.2)	.970 (24.6)	.966 (24.5)	1.110 (28.2)
12	13	.820 (20.8)	.990 (25.1)	1.026 (26.1)	1.170 (29.7)
14	15	.844 (21.4)	1.020 (25.9)	1.076 (27.3)	1.240 (31.5)
16	17	.888 (22.6)	1.040 (26.4)	1.136 (28.9)	1.300 (33.0)
18	19	.904 (23.0)	1.050 (26.7)	1.176 (29.9)	1.320 (33.5)
20	21	.929 (23.6)	1.070 (27.2)	1.236 (31.4)	1.380 (35.1)
22	23	.956 (24.3)	1.110 (28.2)	1.296 (32.9)	1.460 (37.1)
24	25	.979 (24.9)	1.140 (29.0)	1.356 (34.4)	1.530 (38.9)
28		1.197 (30.4)	1.310 (33.3)	1.636 (41.6)	1.770 (45.0)
32		1.248 (31.7)	1.350 (34.3)	1.766 (44.9)	1.860 (47.2)
36		1.294 (32.9)	1.400 (35.6)	1.876 (47.7)	1.970 (50.0)

See inside
back cover fold-out or
pages 13 and 14 for
unabridged Tables I and II.

TABLE II: STANDARD FINISHES

GLENAIR	
SYMBOL	FINISH
B	Cadmium Plate, Olive Drab
M	Electroless Nickel
NF	Cadmium Plate, Olive Drab Over Electroless Nickel
See Inside Back Cover for Additional Finish Options	

TABLE X: CABLE ENTRY

Dash No.	T Max	V Max	Cable Range	
			Min	Max
04	.780 (19.8)	.957 (24.3)	.125 (3.2)	.312 (7.9)
06	.780 (19.8)	1.145 (29.1)	.250 (6.4)	.437 (11.1)
08	.780 (19.8)	1.332 (33.8)	.312 (7.9)	.562 (14.3)
10	.780 (19.8)	1.332 (33.8)	.350 (8.9)	.625 (15.9)
12	.811 (20.6)	1.551 (39.4)	.500 (12.7)	.750 (19.1)
16	.905 (23.0)	1.770 (45.0)	.625 (15.9)	.937 (23.8)
20	1.092 (27.7)	2.113 (53.7)	.875 (22.2)	1.250 (31.8)
24	1.124 (28.5)	2.363 (60.0)	1.000 (25.4)	1.375 (34.9)
28	1.399 (35.5)	2.770 (70.4)	1.250 (31.8)	1.625 (41.3)
32	1.399 (35.5)	3.020 (76.7)	1.437 (36.5)	1.875 (47.6)

1. When maximum cable entry (page 21) is exceeded, Style 2 will be supplied. Dimensions F, G, H and J will not apply. Please consult factory.
2. Metric dimensions (mm) are indicated in parentheses.
3. Cable range is defined as the accommodations range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
4. Consult factory for shorter lengths on straight backshells.

TABLE XI: CABLE ENTRY

Dash No.	W Max	X Max	Y Max	Z Max	Cable Range	
					Min **	Max
03*	.437 (11.1)	.760 (19.3)	.843 (21.4)	.630 (16.0)	.156 (4.0)	.250 (6.4)
04*	.437 (11.1)	.760 (19.3)	.906 (23.0)	.755 (19.2)	.188 (4.8)	.312 (7.9)
06*	.500 (12.7)	.760 (19.3)	1.093 (27.8)	.942 (23.9)	.281 (7.1)	.438 (11.1)
08	.563 (14.3)	.760 (19.3)	1.187 (30.1)	1.067 (27.1)	.344 (8.7)	.562 (14.3)
10	.563 (14.3)	.760 (19.3)	1.281 (32.5)	1.192 (30.3)	.375 (9.5)	.625 (15.9)
12	.563 (14.3)	.760 (19.3)	1.500 (38.1)	1.380 (35.1)	.438 (11.1)	.750 (19.1)
16	.656 (16.7)	1.073 (27.3)	1.719 (43.7)	1.535 (39.0)	.562 (14.3)	.938 (23.8)
20	.656 (16.7)	1.323 (33.6)	2.062 (52.4)	1.848 (46.9)	.750 (19.1)	1.250 (31.8)
24	.656 (16.7)	1.323 (33.6)	2.312 (58.7)	2.255 (57.3)	.781 (19.8)	1.375 (34.9)
28	1.188 (30.2)	1.572 (39.9)	2.719 (69.1)	2.505 (63.6)	.969 (24.6)	1.625 (41.3)
32*	1.187 (30.1)	1.572 (39.9)	2.969 (75.4)	2.755 (70.0)	1.125 (28.6)	1.875 (47.6)
40*	1.125 (28.6)	1.572 (39.9)	3.531 (89.7)	3.255 (82.7)	1.469 (37.3)	2.375 (60.3)

* Not available in Style M clamp.

** Not Applicable Style D