

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER 0G3B-0119-01	27JUL2001	EZ	DB

POLARIZATION KEY SLOT

CLAMPING DEVICE

0.50

INTERLOCKING FEATURE

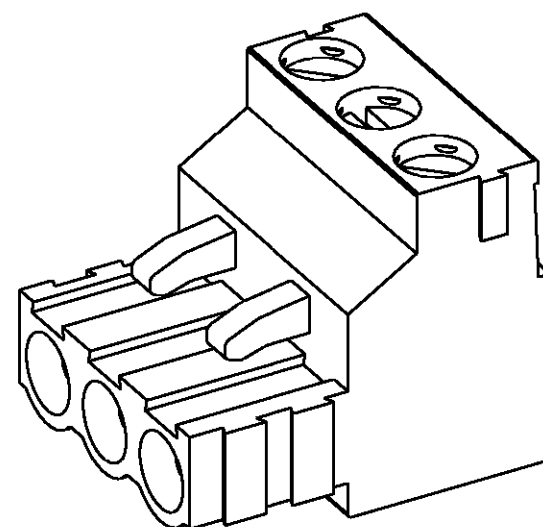

282805-3 AS SHOWN

1 MATERIALS AND FINISH
HOUSING: PA 6-6, UL 94-V0, COLOR GREEN.
CLAMP: BRASS, NICKEL PLATED.
DOUBLE SIDE CONTACT SPRING: PHOSPHOR BRONZE, TIN PLATED.
CLAMPING SCREW: M3, BRASS, NICKEL PLATED.


2 END-TO-END STACKABLE W/INTERLOCK WITHOUT LOSS OF CENTERLINE SPACING.

3 WIRE SIZE RANGE
SOLID WIRE: 0.03-2.5mm² (13AWG).
STRANDED WIRE: 0.03-1.5mm² (15AWG).


4 RECOGNIZED UNDER THE COMPONENT PROGRAM OF UNDERWRITERS LABORATORIES INC. FILE N° E60677.

5 IQO CERTIFICATE WITH SURVEILLANCE IN CONFORMITY WITH IEC 998-1/998-2-1.

6 NOT CUMULATIVE TOLERANCE

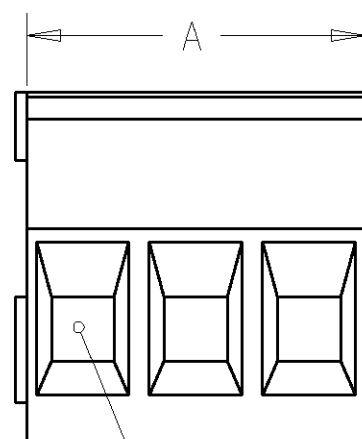


WIRE ENTRY

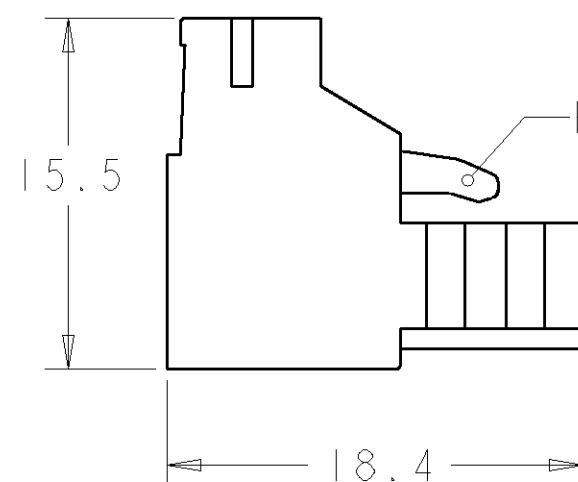

RETENTION LATCH

MATING FACE

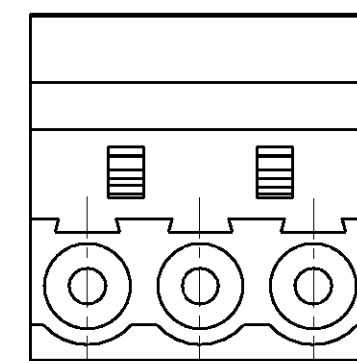

2.50 REF

5.00±0.05

20	4	282805-4
15	3	282805-3
10	2	282805-2
DIM. A	N° OF POS.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN 27JUL2001 E. ZANOLINI CHK 27JUL2001 D. BIEVENOUR APVD 27JUL2001 D. BIEVENOUR	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		PRODUCT SPEC 108-20166	NAME TERMINAL BLOCK PLUG STACKING W/INTERLOCK 5mm PITCH	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.3 1 PLC ±.3 2 PLC ±.25 3 PLC ±.3 4 PLC ±.3 ANGLES ±.2		APPLICATION SPEC 114-20079	RESTRICTED TO	
MATERIAL 1		WEIGHT -	SIZE A3	
FINISH 1		CUSTOMER DRAWING	CAGE CODE 00779	
		SCALE 3:1	DRAWING NO C-282805	
		SHEET 1 OF 1	REV C	