

Internally compensated dual low noise operational amplifier

5532/5532A

FEATURES

- Small-signal bandwidth: 10MHz
- Output drive capability: 600Ω, 10V (rms)
- Input noise voltage: $5\text{nV}/\sqrt{\text{Hz}}$ (typical)
- DC voltage gain: 50000
- AC voltage gain: 2200 at 10kHz
- Power bandwidth: 140kHz
- Slew-rate: $9\text{V}/\mu\text{s}$
- Large supply voltage range: ± 3 to $\pm 20\text{V}$
- Compensated for unity gain


DESCRIPTION

The 5532 is a dual high-performance low noise operational amplifier. Compared to most of the standard operational amplifiers, such as the 1458, it shows better noise performance, improved output drive capability and considerably higher small-signal and power bandwidths.

This makes the device especially suitable for application in high-quality and professional audio equipment, instrumentation and control circuits, and telephone channel amplifiers. The op amp is internally compensated for gains equal to one. If very low noise is of

prime importance, it is recommended that the 5532A version, which has guaranteed noise voltage specifications, be used.

PIN CONFIGURATION

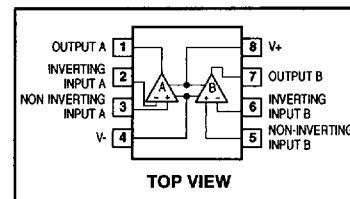


ORDERING INFORMATION

DESCRIPTION	ORDER CODE	PACKAGE DESIGNATOR*
8-Pin Ceramic DIP	5532/BPA	GDIP1-T8
8-Pin Ceramic DIP	5532A/BPA	GDIP2-T8

* MIL-STD 1835 or Appendix A of 1995 Military Data Handbook

EQUIVALENT SCHEMATIC (Each Amplifier)

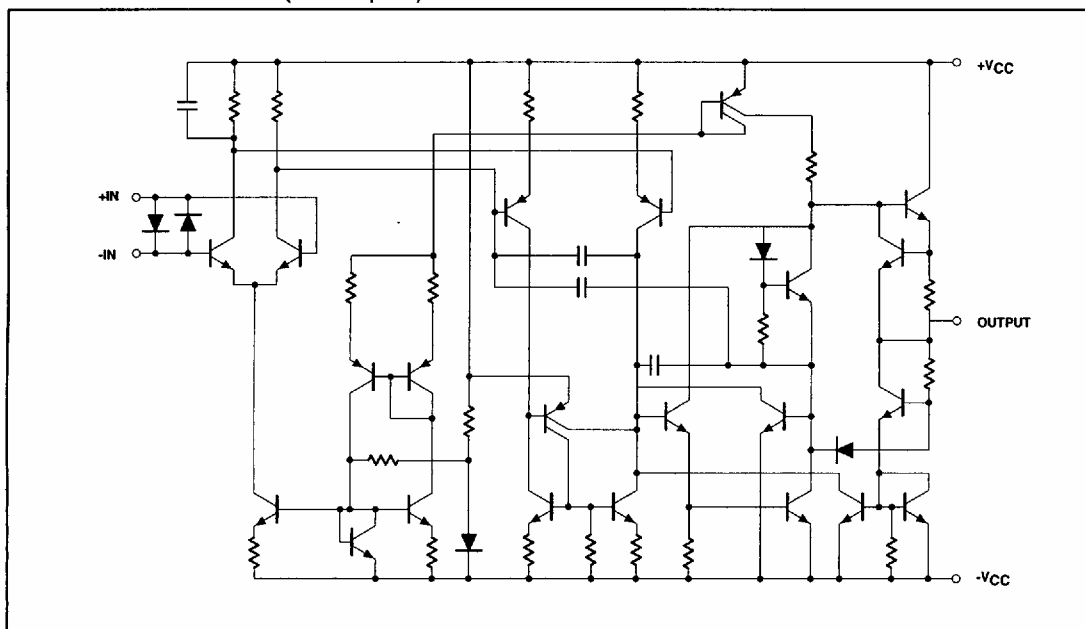

Internally compensated dual low noise operational amplifier

5532/5532A

ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	RATING ²	UNIT
V_S	Supply voltage	± 22	V
V_I	Input voltage	$\pm V$ supply	V
V_{DIFF}	Differential input voltage ¹	± 0.5	V
T_{STG}	Storage temperature range	-65 to +150	°C
T_J	Junction temperature	150	°C
P_D	Power dissipation	1000	mW

DC ELECTRICAL CHARACTERISTICS

 $V_S = \pm 15V$, unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	$T_{amb} = +25^\circ C$			$T_{amb} = -55^\circ C, +125^\circ C$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage			0.5	2.0			3	mV
I_{IO}	Input offset current				100			200	nA
I_{IB}	Input bias current			200	400			700	nA
V_{ICR}	Common mode voltage range		± 12	± 13		± 12			V
CMRR	Common mode rejection ratio		80	100		70			dB
PSRR	Power supply rejection ratio			10	50			100	$\mu V/V$
A_V	Large signal voltage gain	$R_L \geq 2k\Omega, V_O = \pm 10V$	50			25			V/mV
		$R_L \geq 600\Omega, V_O = \pm 10V$	40			20			V/mV
V_O	Output voltage swing	$R_L \geq 600\Omega, V_S = \pm 18V$	± 15	± 16					V
		$R_L \geq 2k\Omega, V_S = \pm 15V$	± 12	± 13		± 12			V
R_I	Input resistance		30	300					k Ω
I_{SC}	Output short-circuit current		10	38	60	5		80	mA
I_{CC}	Supply current				13			13	mA

AC ELECTRICAL CHARACTERISTICS

 $V_S = \pm 15V$, unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	$T_{amb} = +25^\circ C$			$T_{amb} = -55^\circ C, +125^\circ C$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
R_{OUT}	Output resistance	$A_V = 30dB$ Closed loop $f = 10kHz, R_L = 600\Omega$		0.3					Ω
OS	Overshoot	Voltage follower $V_I = 100mV_{p-p}$ $C_L = 100pF, R_L = 600\Omega$		10					%
A_V	Gain	$f = 10kHz$		2.2					V/mV
GBW	Gain bandwidth product	$C_L = 100pF, R_L = 600\Omega$		10					MHz
SR	Slew rate			9					V/ μs
PBW	Power bandwidth	$V_{CC} = \pm 18V$ $V_O = \pm 10V$ $V_O = \pm 14V, R_L = 600\Omega$		140					kHz
				100					kHz

Internally compensated dual low noise
operational amplifier

5532/5532A

ELECTRICAL CHARACTERISTICS


$V_S = \pm 15V$, unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	$T_{amb} = +25^{\circ}C$			$T_{amb} = -55^{\circ}C, +125^{\circ}C$			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
E_N	Input noise voltage ³	$f_O = 30Hz$ $f_O = 1kHz$		8 5	12 6				$nV/\sqrt{Hz}$ $nV/\sqrt{Hz}$
I_N	Input noise current	$f_O = 30Hz$ $f_O = 1kHz$		2.7 0.7					$pA/\sqrt{Hz}$ $pA/\sqrt{Hz}$
CS	Channel separation	$f = 1kHz, R_S = 5k\Omega$		110					dB

NOTES:

1. Diodes protect the inputs against over-voltage. Therefore, unless current-limiting resistors are used, large currents will flow if the different input voltage exceeds 0.6V. Maximum current should be limited to $\pm 10mA$.
2. Operations beyond the limits of this table may impair the useful life of the device.
3. Input noise voltage is guaranteed for the 5532A only.


TYPICAL TEST CIRCUITS

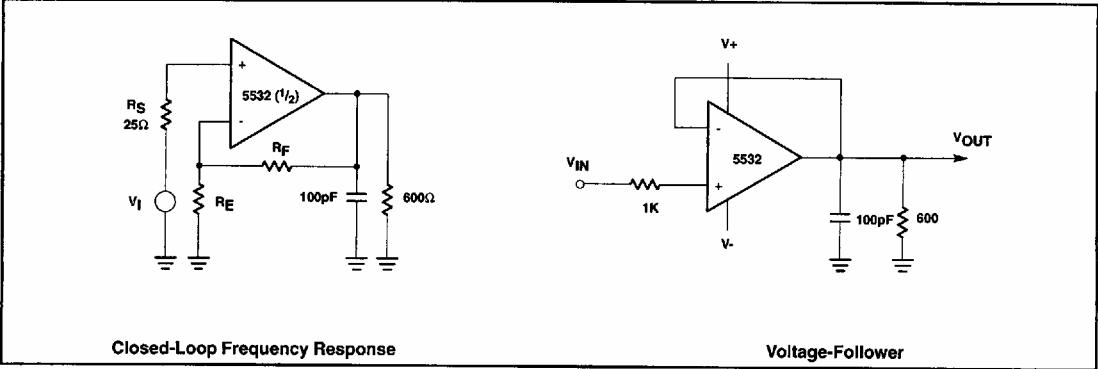

Internally compensated dual low noise operational amplifier

5532/5532A

TYPICAL PERFORMANCE CHARACTERISTICS

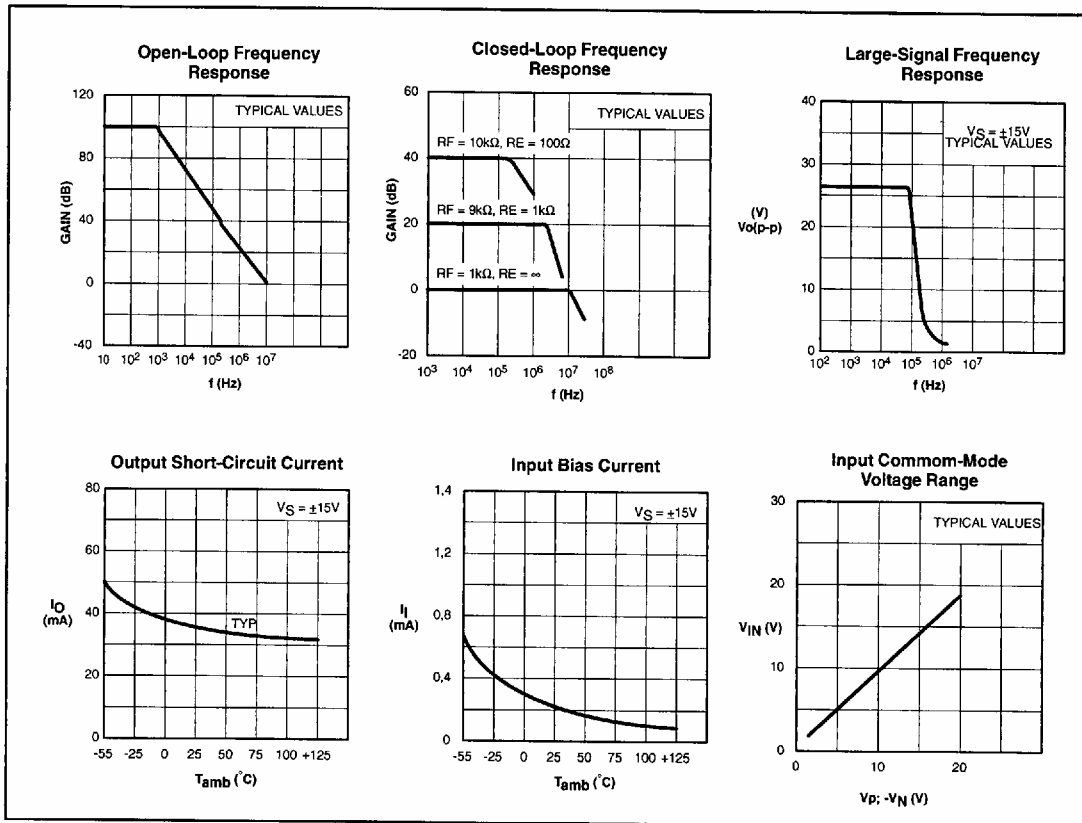

TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

