

**FEATURES**



- HIGH GAIN BANDWIDTH:**  $f_T = 21$  GHz
- LOW NOISE FIGURE:**  $NF = 1.1$  dB at 2 GHz
- HIGH MAXIMUM GAIN:** 20 dB at  $f = 2$  GHz

**DESCRIPTION**

NEC's NE66719 is fabricated using NEC's UHS0 25 GHz  $f_T$  wafer process. This device is ideal for oscillator or low noise amplifier applications at 2 GHz and above.

**OUTLINE DIMENSIONS (Units in mm)**

PACKAGE OUTLINE 19

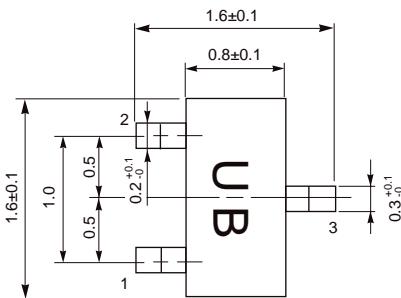PIN CONNECTIONS  
1. Emitter  
2. Base  
3. Collector**ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ )**

PART NUMBER EIAJ <sup>1</sup> REGISTERED NUMBER PACKAGE OUTLINE		NE66719 2SC55667 19			
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX
DC	I <sub>CBO</sub>	nA			100
	I <sub>EBO</sub>	nA			100
	h <sub>FE</sub>		50	70	100
RF	f <sub>T</sub>	GHz	18	21	
	MAG	dB		12.5	
	MSG	dB		13.5	
	S <sub>21e</sub>   <sup>2</sup>	dB	9.0	11.0	
	S <sub>21e</sub>   <sup>2</sup>	dB	9.5	11.5	
	NF	dB		1.1	1.5
	IP <sub>3</sub>			22	
	Cre	pF		0.24	0.30







## Notes:







1. Electronic Industrial Association of Japan.
2. Pulsed measurement, pulse width  $\leq 350 \mu\text{s}$ , duty cycle  $\leq 2\%$ .
3. Capacitance is measured by capacitance meter (automatic balance bridge method) when emitter pin is connected to the guard pin.
4. MAG =  $\left| \frac{S_{21}}{S_{12}} \right| \left( K - \sqrt{K^2 - 1} \right)$

$$5. \text{ MSG} = \left| \frac{S_{21}}{S_{12}} \right|$$







## TYPICAL PERFORMANCE CURVES ( $T_A = 25^\circ\text{C}$ )

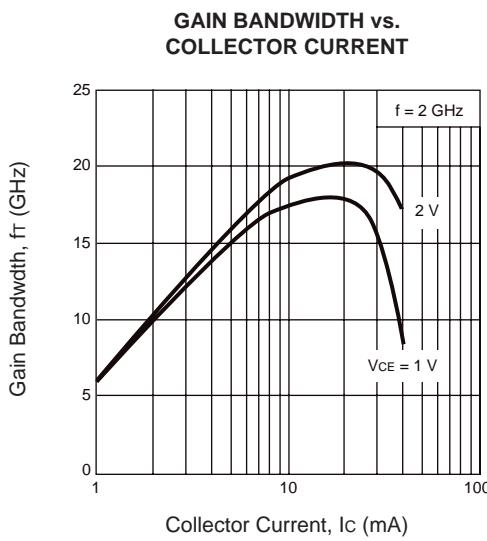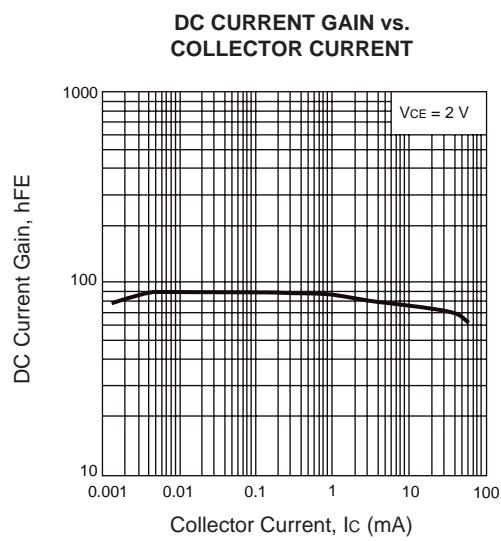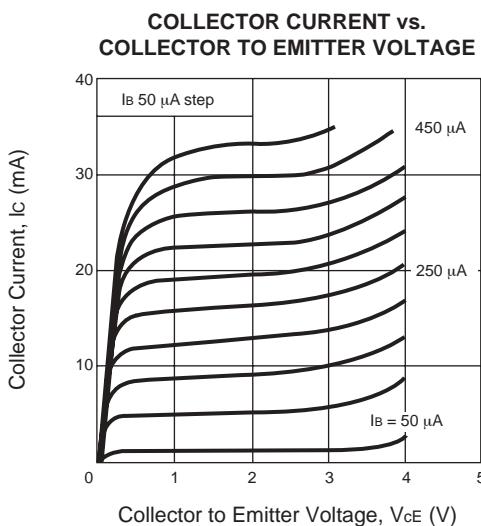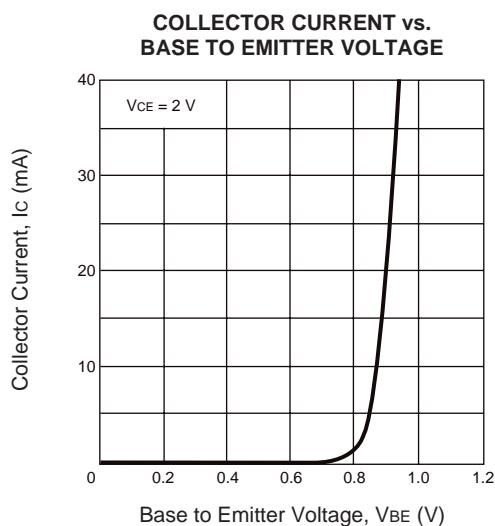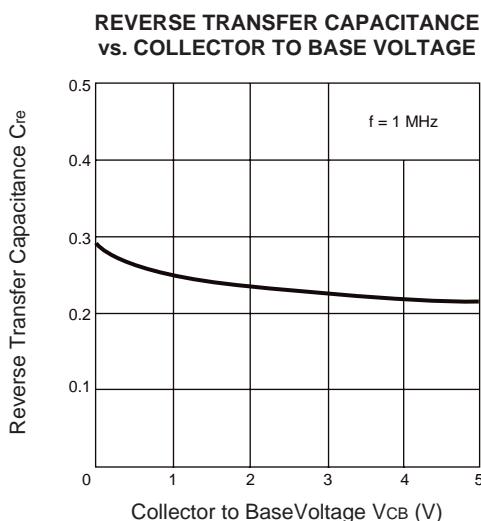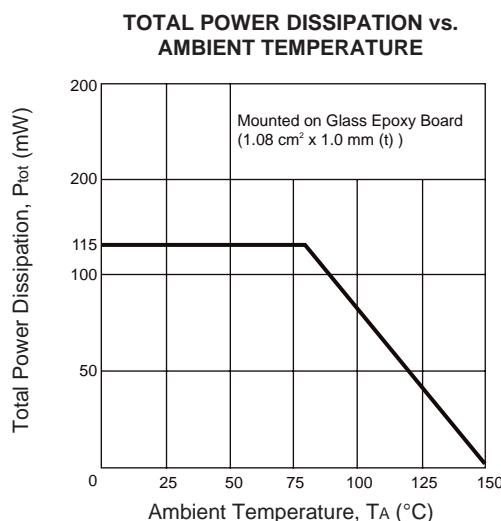

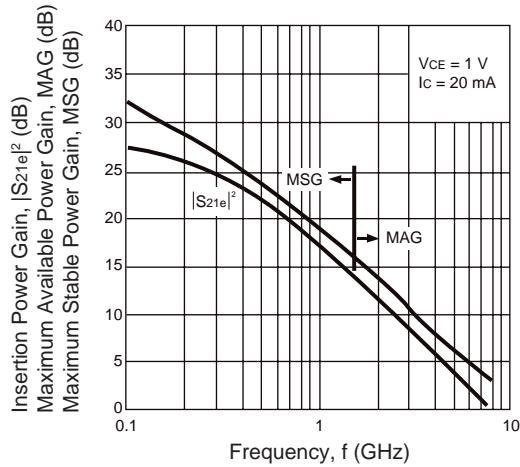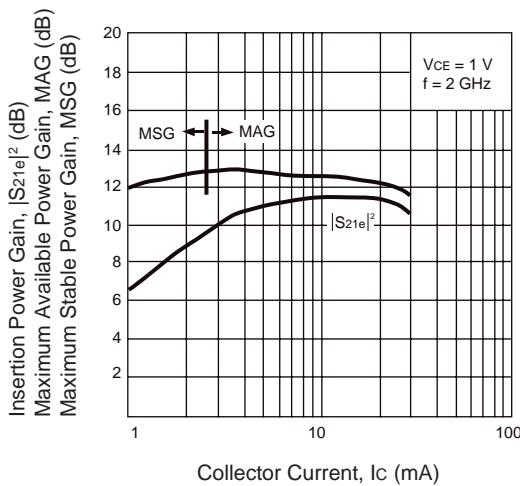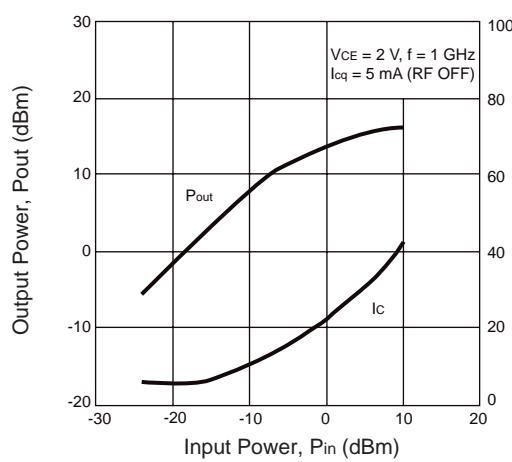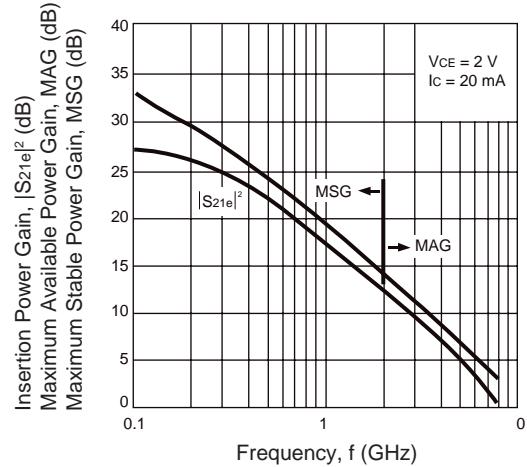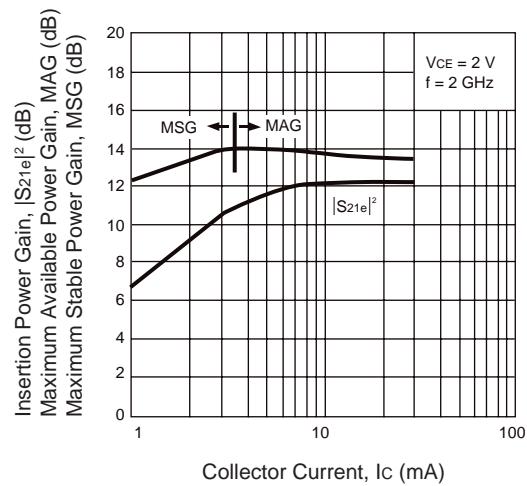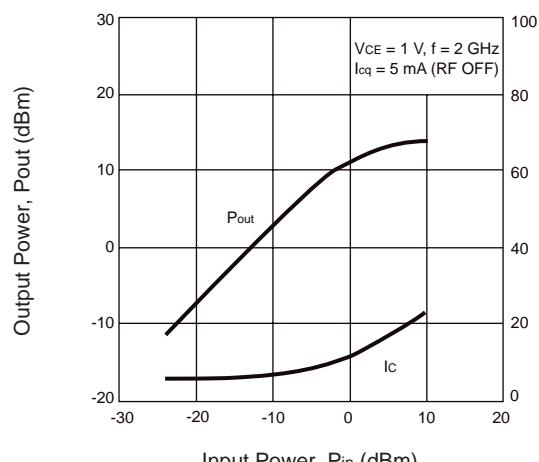TYPICAL PERFORMANCE CURVES ( $T_A = 25^\circ\text{C}$ )INSERTION POWER GAIN, MAXIMUM  
AVAILABLE POWER GAIN, MAXIMUM  
STABLE POWER GAIN vs. FREQUENCYINSERTION POWER GAIN, MAXIMUM  
AVAILABLE POWER GAIN, MAXIMUM STABLE  
POWER GAIN vs. COLLECTOR CURRENTOUTPUT POWER, COLLECTOR  
CURRENT vs. INPUT POWERINSERTION POWER GAIN, MAXIMUM  
AVAILABLE POWER GAIN, MAXIMUM  
STABLE POWER GAIN vs. FREQUENCYINSERTION POWER GAIN, MAXIMUM  
AVAILABLE POWER GAIN, MAXIMUM STABLE  
POWER GAIN vs. COLLECTOR CURRENTOUTPUT POWER, COLLECTOR  
CURRENT vs. INPUT POWER

## TYPICAL PERFORMANCE CURVES ( $T_A = 25^\circ\text{C}$ )

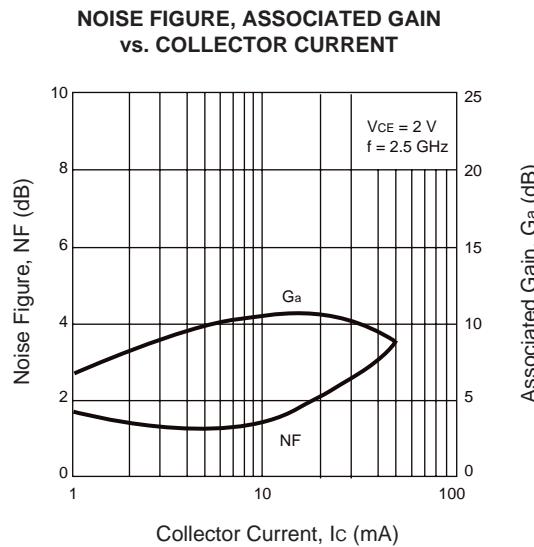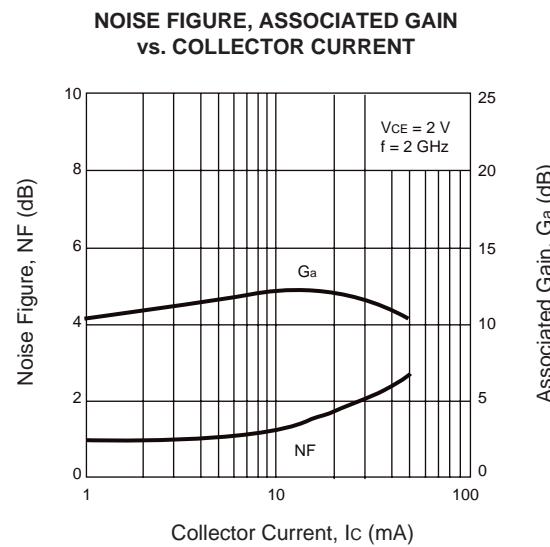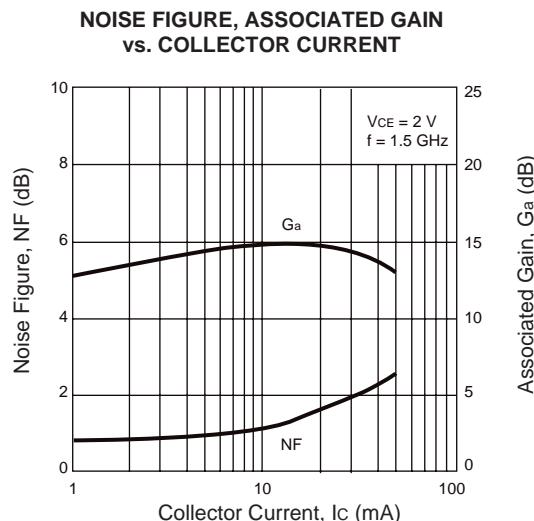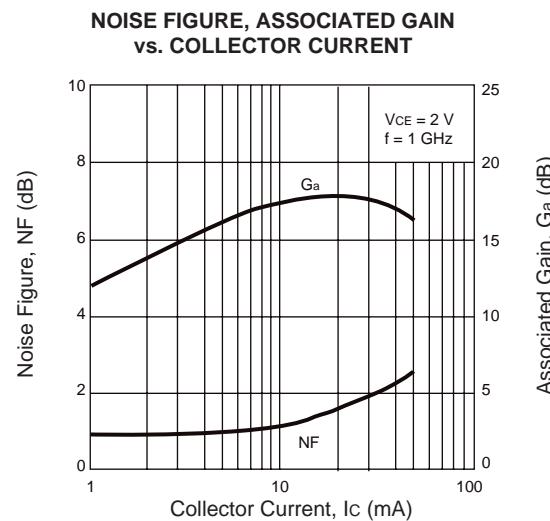

**Remark** The graphs indicate nominal characteristics.





