

HIGH FREQUENCY MAGNETICS T1/E1 Surface Mount Shielded Transformers

TM00140

- Operate at the T1 rate of 1.544 Mb/s and the E1 rate of 2.048 Mb/s
- Interwinding Electrostatic Shield provides low capacitance and high EMI suppression
- Minimum Interwinding Breakdown Voltage of 1500 Vrms
- Operating temperature range: -40° C to +85° C
- Meets IEC 695, 2-2 flammability requirements
- PWB Process Capability: standard printed wiring board assembly techniques, total-immersion cleaning
- Reliability testing: Shock, vibration, temperature cycling, temperature - humidity - bias


ELECTRICAL SPECIFICATIONS at 25° C

Part Number	Turns Ratio ± 2%	Primary Inductance* mH min	Leakage Inductance μH max	DCR Ω max		Interwinding Capacitance ¹ pF max	Non-Shielded Version
	Pri : Sec			Pri	Sec		
2771D	1 : 1.14CT	1.3	1.5	0.53	0.62	5	2795B
2771E	1 : 2CT	3.15	3.2	1.0	3.4	5	2795H

* Measured at 10 kHz, 0.1 Vac
1. With shielded ground

SCHEMATICS

2771D
2771E


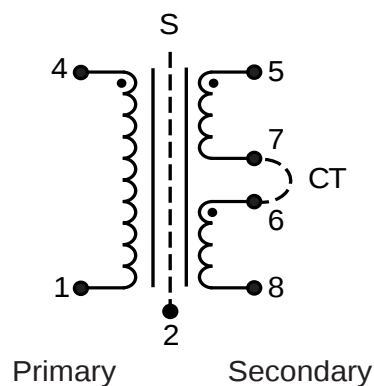


HIGH FREQUENCY MAGNETICS


T1/E1 Surface Mount Shielded Transformers

MECHANICAL

2771D
2771E

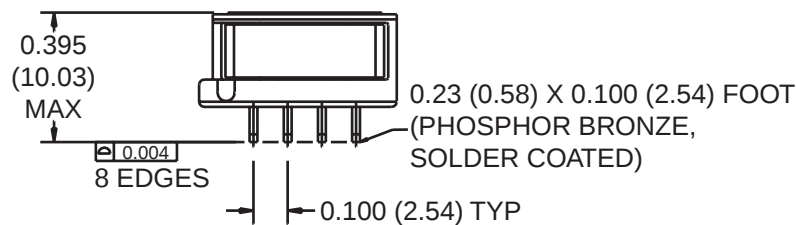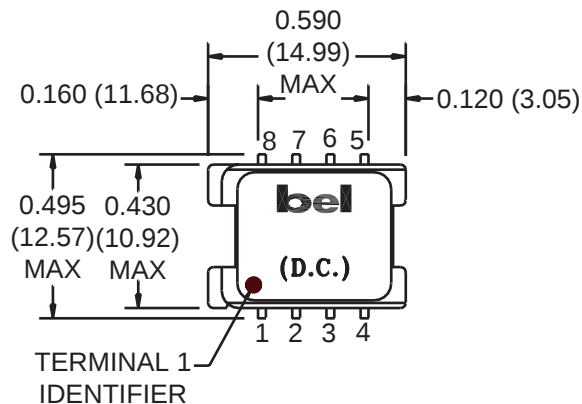

RECOMMENDED PCB PATTERN

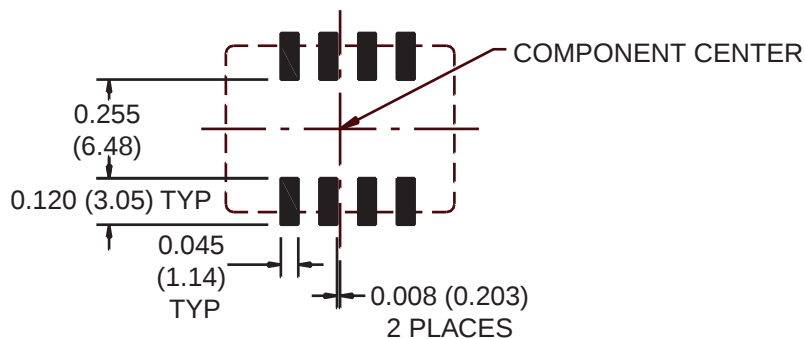

Unless otherwise specified, dimensions are nominal and in inches (millimeters).

©2000 Bel Fuse Inc. Specifications subject to change without notice. 09.00

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com