

Firefighter's Handset

Description

The ETC Emergency Telephone Cabinet, Firefighter's Handset provides two-way emergency telephone communication between firefighters and other authorized personnel for a life safety system. It is designed for use with a variety of life safety control systems. An added benefit is easy integration with systems that have addressable and zone telephone circuits in a single flexible product package.

Typically, it is installed in corridors, lobbies, mechanical control centers, stairways and other strategic locations in a facility. When the handset is lifted from the cradle, it activates a visible indication (LED) that contact has positively initiated. The ETC phone is ready for the operator to communicate with the system that is connected to the building firefighter emergency telephone communications system. It is field configurable for different voltage operations for both supervised and non-supervised systems. The unit has a red epoxy finish with enhanced graphics in white indelible ink permanently marked for identification. It also includes optional surface or flush mounting with no visible hardware.


Model FHS Portable Firefighter's Telephone Handset

This handset comes with a coiled cord. The attached plug fits Firefighter's Phone Jack, Model FPJ, allowing firefighters to make direct communications with a central control area.



FHS Firefighter's Handset

Portable Firefighter's Telephone Handset and Cabinet

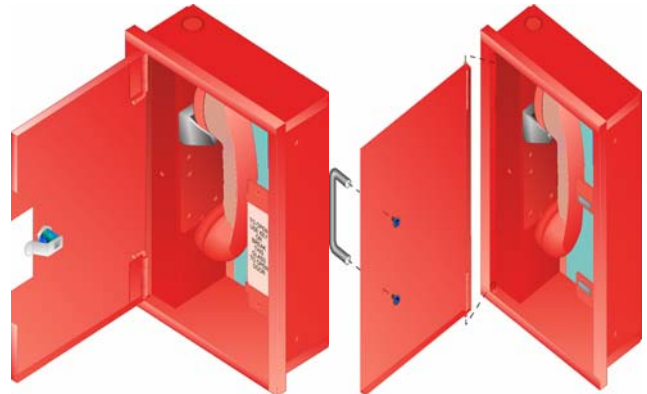

ETC with Key Lock Latch

ETC with Pull Handle Magnetic Latch

Features

- Durable, red finish and 16" (41 cm) gauge steel construction.
- Surface or flush backbox.
- No tools required - use slide pins to insert the removable door.
- Offers clearly marked, raised clamp terminals for field wiring.
- Key lock or break glass access.
- Two cabinet door options:
 - Key lock latch door.
 - NYC warden station magnetic latch door with pull handle.
- Overall backbox dimensions 9" W x 13" H x 4" D (23 x 33 x 10 cm) includes a 1" (2.5 cm) extension flange.
- Complies with the ADA standards for surface-mount.
- Multiple voltages / supervised polarity equipped.

An ISO 9000-2000 Company

SIGNALING



GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472 - Tel: (203) 484-7161 - Fax: (203) 484-7118

Specifications are for information only, are not intended for installation purposes, and are subject to change without notice. No responsibility is assumed by Gamewell-FCI for their use.

©2006 Gamewell-FCI. All rights reserved.

www.gamewell-fci.com

9020-0667 Rev. B page 1 of 2

Telephone Receptacles

FPJ Firefighter's Phone Jack

Receptacle is a semi-flush mounted with a single-gang box (the box is not furnished with a receptacle). The receptacle has a single phone jack mounted on an attractive, single-gang, stainless steel plate. Color-coded wires, 6 inches (15.2 cm) long, are prewired to the jack to enable fast and accurate wiring to the system.



FPJ

Backbox Overall Dimensions:

The backbox dimensions appear in Figure 1. The foot print on the wall measures 9.25" W x 12/8" H (23.5 x 32.5 cm).

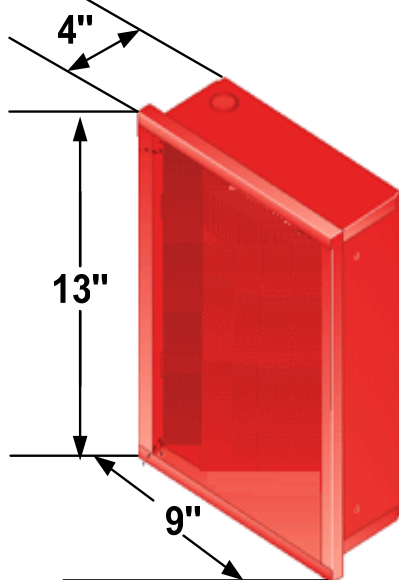


Figure 1 Backbox Dimensions

Specifications

Emergency Telephone Cabinet:

Cabinet	16" (41 cm) gauge steel with durable epoxy red finish cover.
Cover	1" (2.5 cm) high lettering for easy identification with permanent white indelible ink.
Phone cradle switch	Sealed micro switch-based cradle.
Phone cabinet	Includes a removable door with finger slide pins used for improved service.
Handset	Red with optional red coil cord or armored cable.
Field connections	Terminated to a raised clamp terminal and clearly marked.
Backbox dimensions	13" H x 9" W x 4" D (33 x 23 x 10 cm) includes a 1" (2.5 cm) extension flange (Complies with ADA depth for surface-mount).

Ordering Information

Part Number Description

FC00530	Enclosure, surface or recessed, red
FC00535CX	Telephone assembly coil cord / standard headset, red
FC00535AX	Telephone assembly armored cord / standard headset, red
FC00535MD	Solid door / magnetic latch
FC00535SL	Solid door / PD-625 key lock
FC00542	Break glass door / PK-625 key
FC00531	1" Extension flange / red
FC00533	Replacement break glass
FC00535B	PK-625 lock for FF phone cab
FC00566	FF phone cabinet - holds 5
FC00567	FF phone cabinet - holds 10
FPJ	Fire phone jack
FHS	Fire handset

GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472 - Tel: 203-484-7161 - Fax: 203-484-7118

www.gamewell.fci.com

9020-0667 Rev. B page 2 of 2