


Product Features

- Low Noise Figure
- High Reliability
- High Linearity
- Single Supply Voltage
- Small size by using simple matching circuit board
- High Productivity
- Hybrid Amplifiers on Ceramic Board
- Competitive Price

Application

- Wibro, Wimax Repeater
- Base Station
- RF Sub-Systems

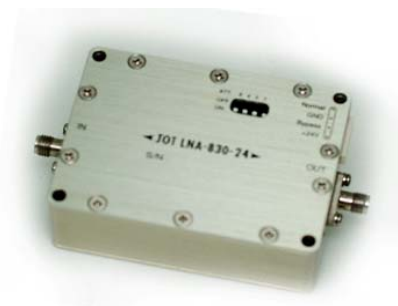

Description


This LNA Module is a high gain, ultra low noise amplifier module. It has superior performance comes with a modest price tag.

Specifications


(Operating Temperature:-30°C~+70°C)

PARAMETER	RFL-2635D	RFL-3535D
Frequency Range	2500~2700MHz	3400~3600MHz
Bandwidth	20MHz	
Gain	35dB \pm 0.5dB	35dB \pm 0.5dB
Gain Flatness	\pm 0.5dB	
VSWR	1.3 : 1	
Noise Figure(Max)	1.2dB	1.6dB
OIP3(Max)	37dBm	37dBm
Current(Max)	450mA	500mA
Supply Voltage	8~12V	
Current Alarm	Normal : Open, Fail : GND (Open Collector)	
Operating Temperature	-30°C ~ +70°C	
Connector Type	SMA - Female	
Case Dimension	52 \times 46 \times 19 [mm]	

Functional Diagram

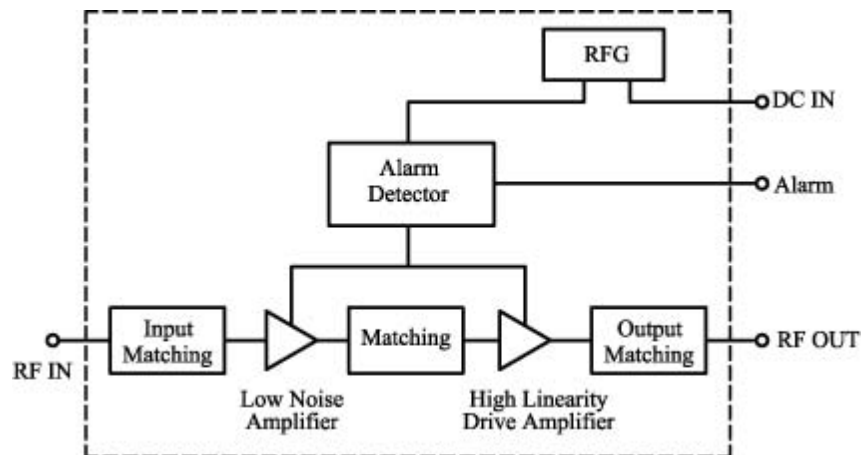

Dimensions in mm

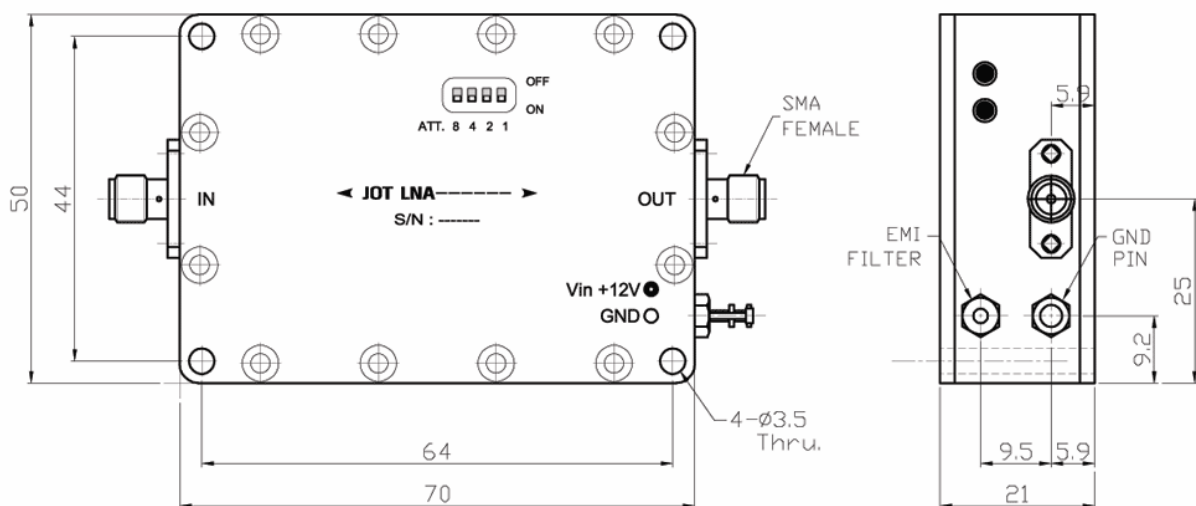

RFHIC Corporation (RFHIC) reserves the right to make changes to any products herein or to discontinue any product at any time without notice. RFHIC do not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. The product specifications herein expressed have been carefully checked and are assumed to be reliable. However, RFHIC disclaims liability for inaccuracies and strongly recommends buyers to verify that the information they are using is current before placing purchase orders. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such use. RFHIC's liability under or arising out of damages, claims of whatsoever kind and nature which RFHIC products could cause shall be limited in amount to the net purchase price of the products sold to buyer by RFHIC.