


General Specifications for LJE Series

Insulation Resistance:	100MΩ min. at 500 V DC
Withstanding Voltage:	500 V AC for 1 minute
Contact Resistance:	30mΩ max. (initial)
Soldering Heat Test:	260 ±5°C for 5±1 seconds
Insertion Force:	0.3 to 2.0 Kg
Extraction Force:	0.3 to 2.0 Kg
Mating Cycles:	5,000 times

Mating Plugs for LJE Series (TH Earphone Jacks)


Ø 2.5mm

Mono




Ø 3.5mm

Mono




Ø 2.5mm

Stereo



Ø 3.5mm




Stereo

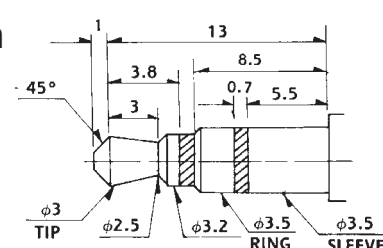

LJE0252-B



LJE0252-* (Stereo)

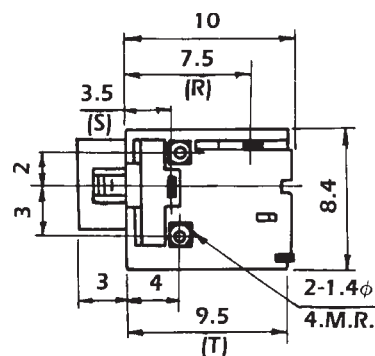



Part No. (Details)



LJE0252-B	LJE0252-3RT	LJE0252-4R

PCB-Layout (Bottom View)

LJE0357-B

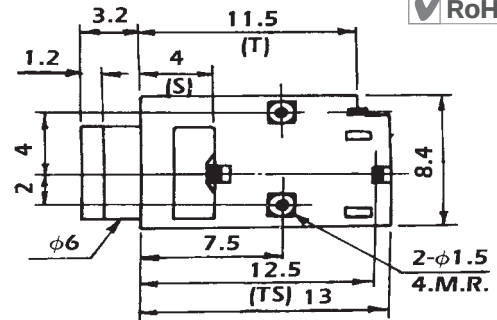



Part No. (Details)





PCB-Layout (Bottom View)

LJE0357-3RT (Stereo)

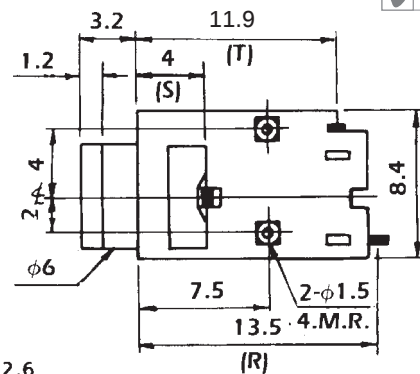



Part No. (Details)





PCB-Layout (Bottom View)

LJE0366-*

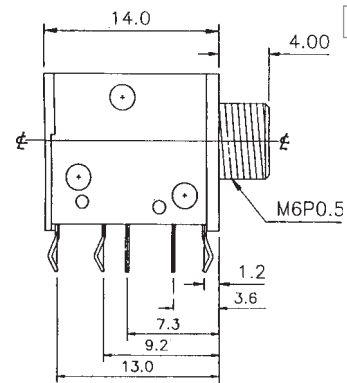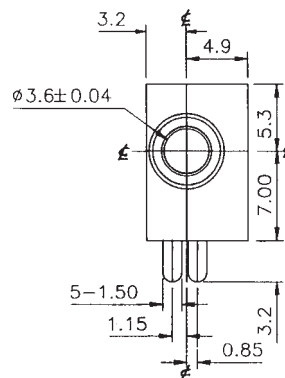




Part No. (Details)

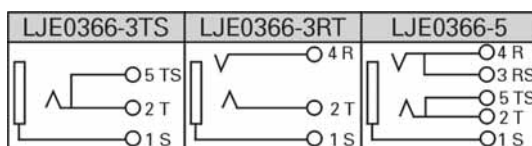

PCB-Layout (Bottom View)

LJE0359AM-* (w/o Thread)




LJE0359M-* (with Thread)



Part No. (Details)

LJE0359*M-2T	LJE0359*M-3RT	LJE0359*M-3TS	LJE0359*M-4T	LJE0359*M-4R	LJE0359*M-5

LJE0361-*





Part No. (Details)

LJE0361-3RT	LJE0361-3TS	LJE0361-4T	LJE0361-4R	LJE0361-5

PCB-LAYOUT (Bottom View)

LJE0363A-3RT (Stereo, with Metal Ring)



LJE0363-3RT (Stereo, w/o Metal Ring)

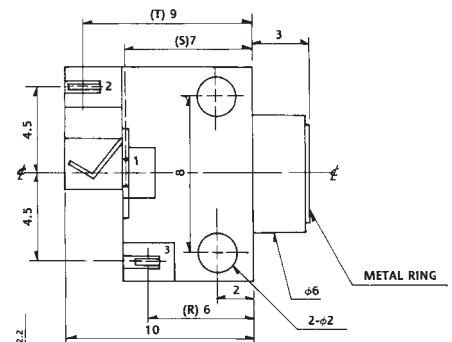

Part No. (Details)


LJE0363*-3RT

PCB-LAYOUT (Bottom View)





PCB-Layout (Bottom View)

LJE0364-3RT	LJE0364-5






 RoHS

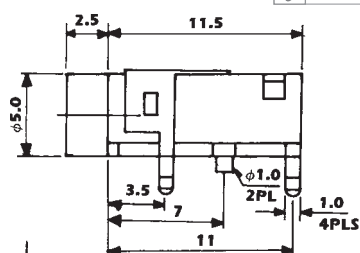

PCB-Layout (Bottom View)

LJE3530K

The diagram shows a terminal block with three terminals: 1S, 3R, and 2T. Terminal 1S is connected to a checkmark symbol. Terminal 3R is connected to a switch symbol. Terminal 2T is connected to a switch symbol.

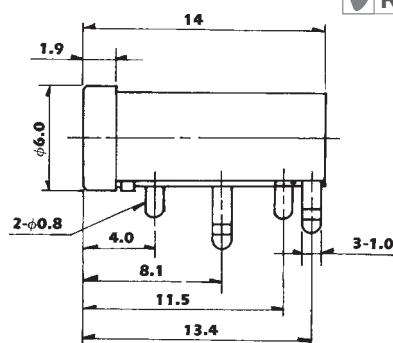

PCB-Layout (Bottom View)

LJE3531

The diagram shows a control unit with three terminals: 1S, 3R, and 2T. Terminal 1S is connected to a checkmark symbol. Terminal 3R is connected to a hook symbol. Terminal 2T is connected to a triangle symbol.

