

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0746951001](#)
Status: **Active**
Overview: [vhdm__hsd](#)
Description: 2.00mm (.079") Pitch 5-Row VHDM-HSD™ Backplane Header, Open Module, 40 Circuits, Pin Length 4.75mm (.187")

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19880

General

Product Family Backplane Connectors
Series [74695](#)
Application Backplane
Application Tooling Documents [TM-622010999.pdf](http://www.molex.com/pdm_docs/ats/TM-622010999.pdf)>Tooling Manual
Comments Open Header
Component Type PCB Header
Overview [vhdm__hsd](#)
Product Name VHDM-HSD™
Style N/A

Physical

Circuits (Loaded) 40
Circuits (maximum) 40
Color - Resin Black
Durability (mating cycles max) 200
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part None
Material - Metal High Performance Alloy (HPA)
Material - Plating Mating Gold
Material - Plating Termination Tin-Lead
Material - Resin High Temperature Thermoplastic
Number of Columns 10
Number of Pairs Open Pin Field
Number of Rows 5
Orientation Vertical
PCB Retention None
PCB Thickness Recommended (in) 0.070 In
PCB Thickness Recommended (mm) 1.80 mm
Packaging Type Tube
Pitch - Mating Interface (in) 0.079 In
Pitch - Mating Interface (mm) 2.00 mm
Plating min: Mating (µin) 30
Plating min: Mating (µm) 0.75
Plating min: Termination (µin) 30
Plating min: Termination (µm) 0.75
Polarized to PCB Yes
Surface Mount Compatible (SMC) Yes
Temperature Range - Operating -55°C to +105°C
Termination Interface: Style Through Hole - Compliant Pin



Series

image - Reference only

EU RoHS

RoHS Compliant by Exemption

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[74695Series](#)

Mates With

[74670 HSD Daughtercard](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
VHDM® Signal Pin	0622015700
Insertor Repair Tool	
VHDM® 5 Row Pin	0622015810
and Shield Repair Tool	
VHDM® 5 Row	0622016010
Shield Extraction Tool	
VHDM-HSD™ Signal	0622020201
Header, 5 Row by	

Electrical

Current - Maximum per Contact	1A
Data Rate	5.0 Gbps
Shielded	Yes
Voltage - Maximum	120V AC (RMS)/DC

10 Wide, 20.00mm
(.787")

Material Info




Reference - Drawing Numbers

Packaging Specification	PK-74695-003
Sales Drawing	SD-74695-002

VHDM-HSD is a trademark of Amphenol Corporation



This document was generated on 06/08/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

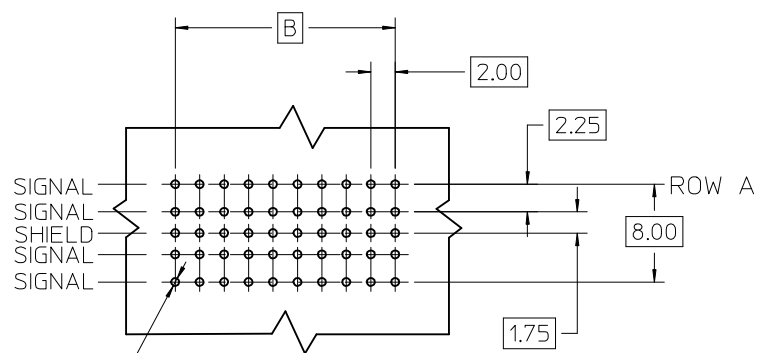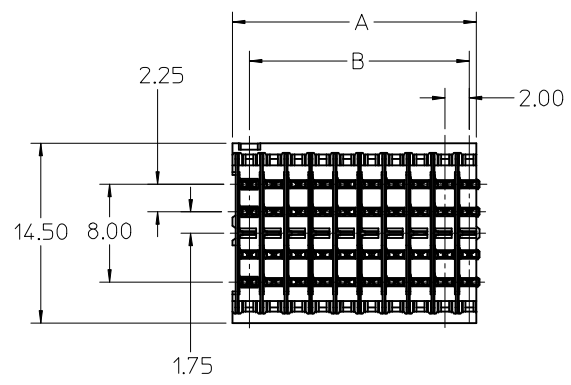

Ø0.66 DRILL
Ø0.56 ±0.05 PTH
Ø1.00 PAD
⊕ Ø0.10

BACKPLANE HOLE PATTERN
RECOMMENDED DIMENSION

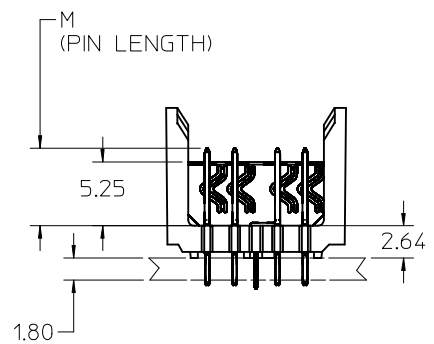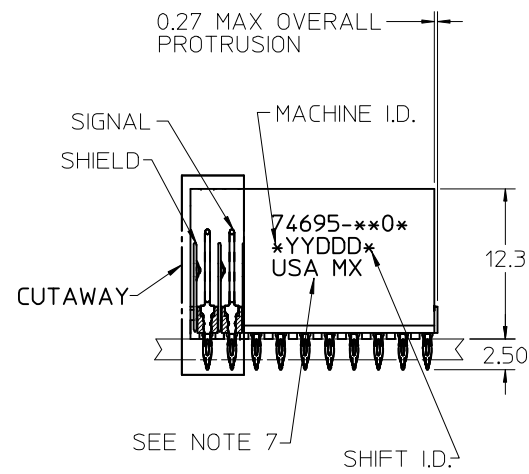

NOTES:


1. MATERIAL: HOUSING -LIQUID CRYSTAL POLYMER (LCP). GLASS-FILLED. UL 94 V-0. COLOR BLACK. SIGNAL & SHIELD -COPPER ALLOY.
2. FINISHES: SELECTIVE GOLD (Au) ON CONTACT AREA. SELECTIVE TIN/LEAD (Sn/Pb) OR SELECTIVE MATTE TIN (Sn) ON PCB TAILS. NICKEL (Ni) OVERALL.
3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-74031-999.
4. FOR MIXED CONTACT MATING LENGTHS CONSULT MOLEX FOR AVAILABILITY.
5. FOR SPECIFIC PART NUMBER AND MATING INFORMATION REFER TO SHEET 2.
6. PACKAGE PER PK-74695-003.
7. EITHER MARK PART NUMBER AND DATE CODE APPROXIMATELY WHERE SHOWN OR PLACE LABEL ON THE TUBE.

REVISED: ADD LEAD-FREE EC NO: UCP2006-1727 DRWN:CTHOMAS 2006/02/16 CHKD: JINGHAM 2006/02/16 APPR:KMULVEY 2006/02/16 D		DESCRIPTION REV	QUALITY SYMBOLS -0 -0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 2.5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	REVISE ON CAD ONLY				
						DIMENSION STYLE MM ONLY			TITLE HSD SALES ASSEMBLY 5 ROW OPEN END BACKPLANE				
4 PLACES				± ---	± ---	DRAWN BY			DATE		MOLEX INCORPORATED		
3 PLACES				± ---	± ---	MQWANG			2001/04/11				
2 PLACES				± ---	± ---	CHECKED BY			DATE				
1 PLACE				± ---	± ---	NMARTIN			2001/04/14		 MOLEX INCORPORATED		
ANGULAR ±1/2°				APPROVED BY		DATE		MATERIAL NO.		DOCUMENT NO.			
DRAFT WHERE APPLICABLE				CBIXLER		2001/04/14		SEE SHT.2&3		SD-74695-002		1 OF 3	
MUST REMAIN WITHIN DIMENSIONS				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								B	

MATERIAL NUMBER ASSIGNMENT

74695-**-** SEE TABLES (SHEET 3)

- NUMBER OF COLUMNS/PLATING
- 10 = 10 COLUMN TIN/LEAD
 - 12 = 12 COLUMN TIN/LEAD
 - 15 = 15 COLUMN TIN/LEAD
 - 25 = 25 COLUMN TIN/LEAD
 - 90 = 10 COLUMN MATTE TIN
 - 92 = 12 COLUMN MATTE TIN
 - 95 = 15 COLUMN MATTE TIN
 - 85 = 25 COLUMN MATTE TIN

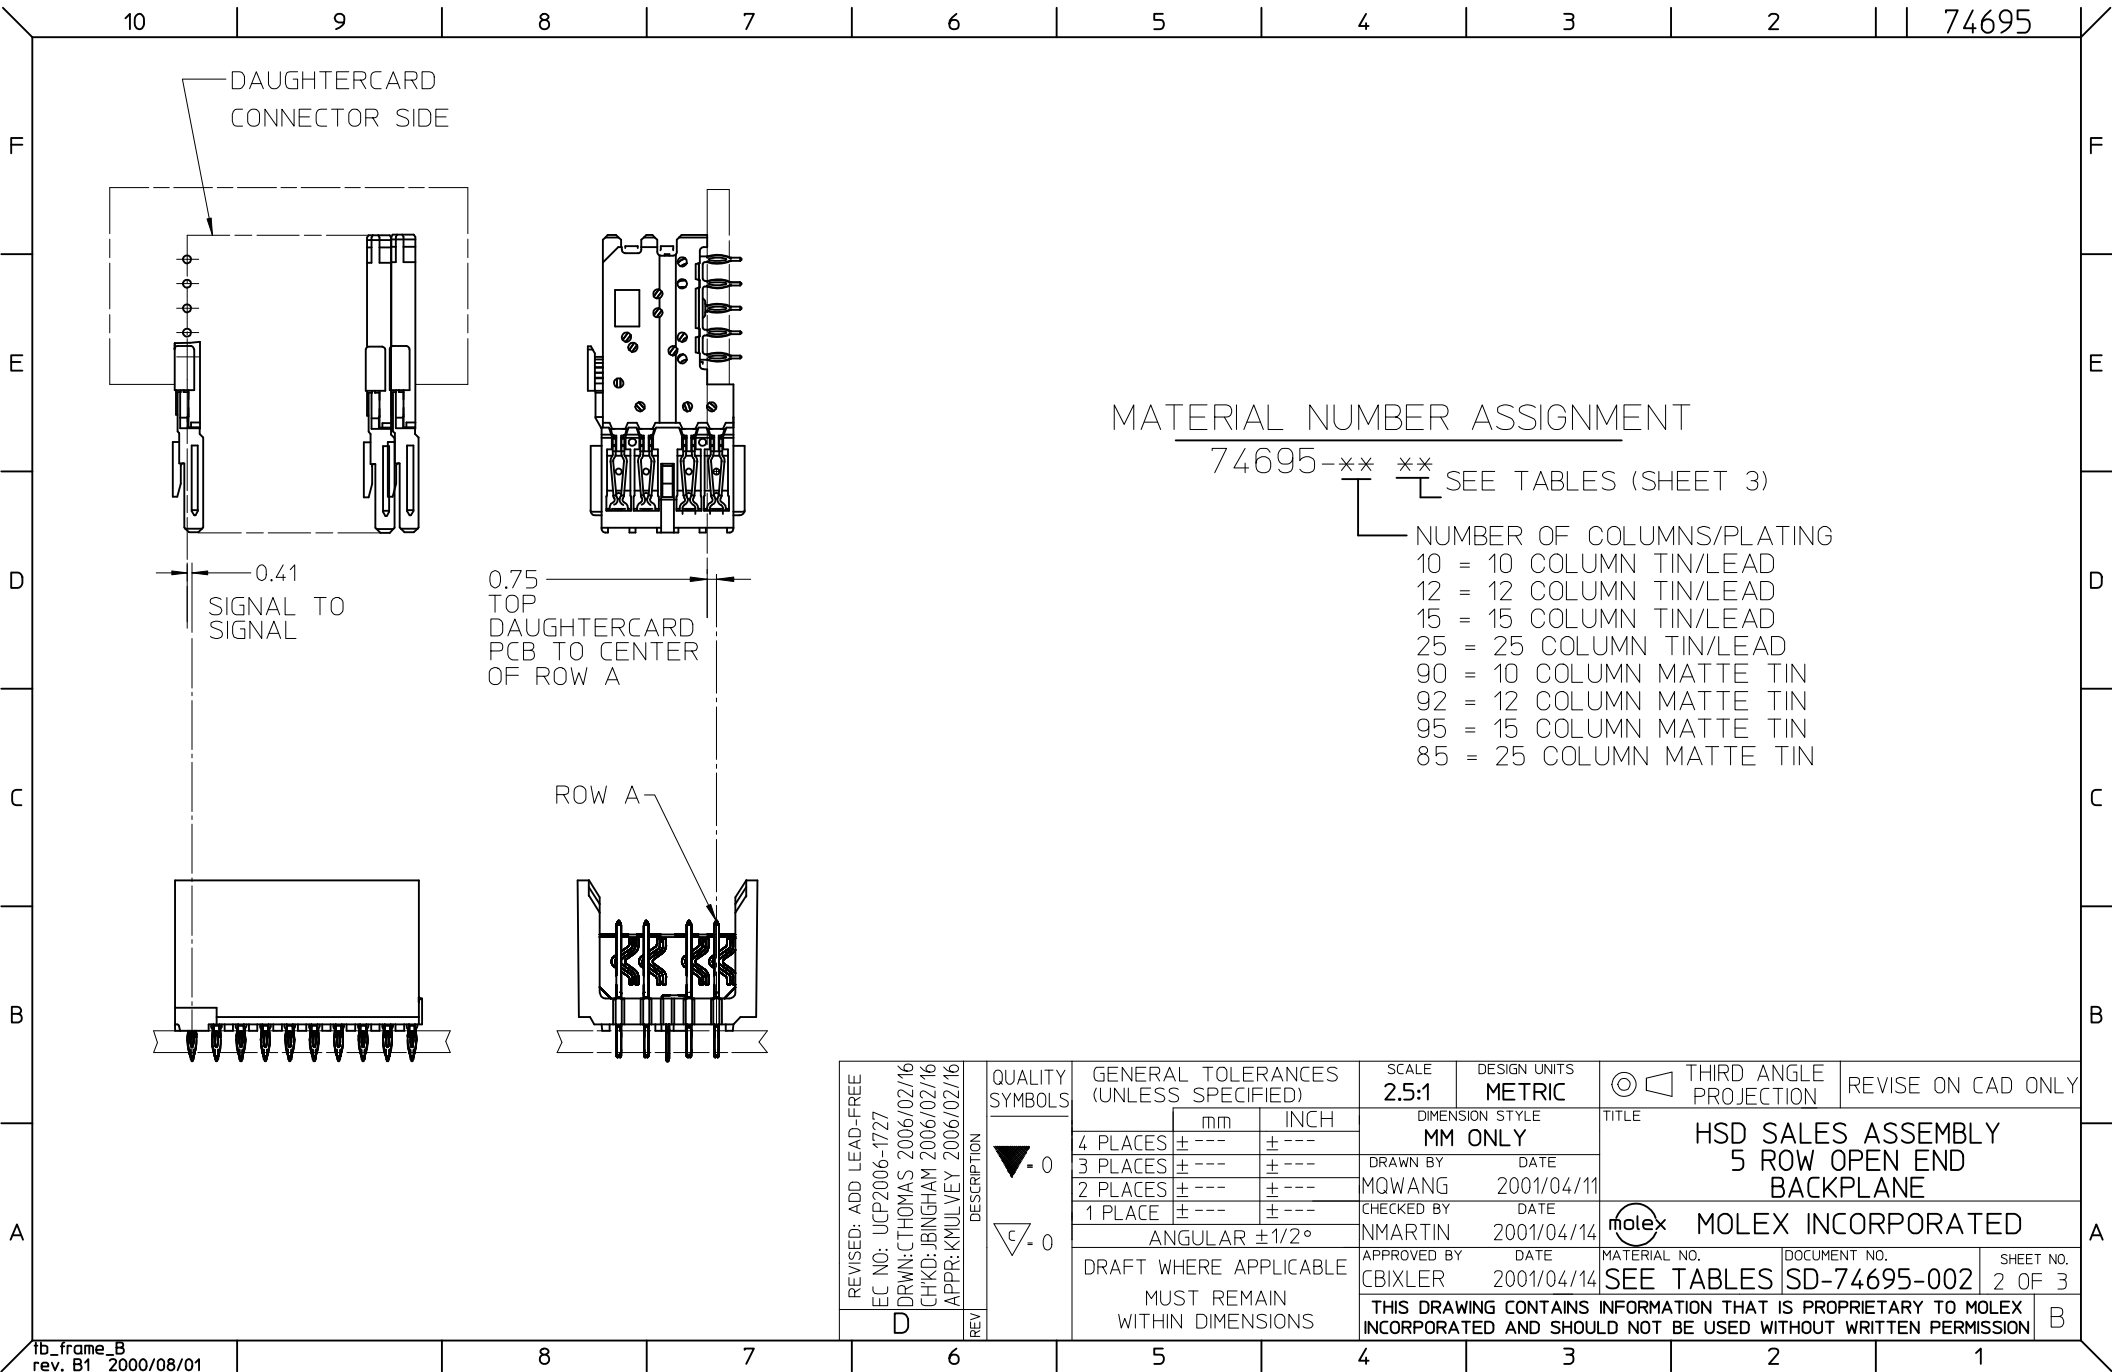

PART NUMBER	COLUMN	NUMBER OF SIGNAL PINS	NUMBER OF SHIELDS	A	B	M	Au (um) THICKNESS	Sn/Pb (um)
74695-1001	10	40	10	20.00	18.00	4.75	0.76	0.76-1.52
74695-1006							1.27	
74695-1201	12	48	12	24.00	22.00		0.76	
74695-1206							1.27	
74695-2501	25	100	25	50.00	48.00		0.76	
74695-2506							1.27	
74695-1002	10	40	10	20.00	18.00	6.25	0.76	
74695-1007							1.27	
74695-1202	12	48	12	24.00	22.00		0.76	
74695-1207							1.27	
74695-2502	25	100	25	50.00	48.00		0.76	
74695-2507							1.27	
74695-1003	10	40	10	20.00	18.00	4.25	0.76	
74695-1008							1.27	
74695-1203	12	48	12	24.00	22.00		0.76	
74695-1208							1.27	
74695-2503	25	100	25	50.00	48.00		0.76	
74695-2508							1.27	
74695-1004	10	40	10	20.00	18.00	5.15	0.76	
74695-1009							1.27	
74695-1204	12	48	12	24.00	22.00		0.76	
74695-1209							1.27	
74695-2504	25	100	25	50.00	48.00		0.76	
74695-2509							1.27	

TIN/LEAD CHART

PART NUMBER	COLUMN	NUMBER OF SIGNAL PIN	NUMBER OF SHIELD	A	B	M	Au (um) THICKNESS	Sn (um)
74695-9001	10	40	10	20.00	18.00	4.75	0.76	0.76-152
74695-9006							1.27	
74695-9501	12	48	12	24.00	22.00		0.76	
74695-9506							1.27	
74695-8501	25	100	25	50.00	48.00		0.76	
74695-8506							1.27	
74695-9002	10	40	10	20.00	18.00	0.76		
74695-9007						1.27		
74695-9502	12	48	12	24.00	22.00	0.76		
74695-9507						1.27		
74695-8502	25	100	25	50.00	48.00	0.76		
74695-8507						1.27		
74695-9003	10	40	10	20.00	18.00	0.76		
74695-9008						1.27		
74695-9503	12	48	12	24.00	22.00	0.76		
74695-9508						1.27		
74695-8503	25	100	25	50.00	48.00	0.76		
74695-8508						1.27		
74695-9004	10	40	10	20.00	18.00	0.76		
74695-9009						1.27		
74695-9504	12	48	12	24.00	22.00	0.76		
74695-9509						1.27		
74695-8504	25	100	25	50.00	48.00	0.76		
74695-8509						1.27		

LEAD FREE CHART

ADDED SHEET: 3

EC NO: UCP2006-1727

DRWN:CTHOMAS 2006/02/16

CHKD:JBINGHAM 2006/02/16

APPR:KMULVEY 2006/02/16

D

QUALITY SYMBOLS

▽=0

▽=0

REV

DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)

mm

INCH

4 PLACES ± --- ± ---

3 PLACES ± --- ± ---

2 PLACES ± --- ± ---

1 PLACE ± --- ± ---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE

MM ONLY

DRAWN BY

DATE

QWANG 2001/04/11

CHECKED BY

DATE

NMARTIN 2001/04/14

APPROVED BY

DATE

CBIXLER 2001/04/14

MATERIAL NO.

SEE TABLES

SIZE

C

SCALE

DESIGN UNITS

METRIC

THIRD ANGLE PROJECTION

TITLE

HSD SALES ASSEMBLY
5 ROW OPEN END
BACKPLANE

MOLEX

MOLEX INCORPORATED

DOCUMENT NO.

SD-74695-002

SHEET NO.

3 OF 3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION