

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0340620007

Status:

Active

Overview:

mx150

Description:

5.00mm (.197") Pitch MX150™ Cable Sealed Female Connector, Single Row, 2 Circuits, Polarization C, with Connector Position Assurance, Black

Documents:

Application Specification (PDF)

Drawing (PDF)

Product Specification PS-34062-000 (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family

Series

Comments

MolexKits

More Detailed Tech Information

Overview

Product Name

Crimp Housings

34062

With Connector Position Assurance (CPA)

Yes

<http://ewcap.uscarteams.org>

mx150

MX150™

Physical

Circuits (maximum)

Circuits Detail

Color - Resin

Gender

Glow-Wire Compliant

Keying to Mating Part

Lock to Mating Part

Material - Resin

Number of Rows

Packaging Type

Panel Mount

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Polarized to Mating Part

Stackable

Temperature Range - Operating

2

2

Black

Female

No

Yes

Yes

Nylon

1

Bag

No

0.197 In

5.00 mm

0.197 In

5.00 mm

Yes

No

-40°C to +125°C

Electrical

Current - Maximum per Contact

15A

Material Info

Reference - Drawing Numbers

Packaging Specification

Product Specification

Sales Drawing

PK-30907-879

PS-34062-000

SD-34062-001



EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

34062Series

Mates With

Direct Connect only






























Use With

34083 Tin (Sn) Cable Seal Female Terminal,

34081 Gold (Au) Cable Seal Female Terminal

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

ASSEMBLY PART NUMBER	COLOR	KEYING OPTION	CPA	CLIPSLOT	TOOLED
34062-0001	BLACK	A	NO	NO	YES
34062-0002	GRAY	B	NO	NO	YES
34062-0003	BLACK	C	NO	NO	YES
34062-0004	BLACK	D	NO	NO	YES
34062-0005	BLACK	A	YES	NO	YES
34062-0006	GRAY	B	YES	NO	YES
34062-0007	BLACK	C	YES	NO	YES
34062-0008	BLACK	D	YES	NO	YES
34062-0009	GRAY	D	NO	NO	YES
34062-0010	GRAY	D	YES	NO	YES
34062-0011	BLACK	A	NO	YES	YES
34062-0012	GRAY	B	NO	YES	NO
34062-0013	BLACK	C	NO	YES	NO
34062-0014	BLACK	D	NO	YES	NO
34062-0015	BLACK	A	YES	YES	YES
34062-0016	GRAY	B	YES	YES	NO
34062-0017	BLACK	C	YES	YES	NO
34062-0018	BLACK	D	YES	YES	NO
34062-0019	GRAY	D	NO	YES	NO
34062-0020	GRAY	D	YES	YES	NO

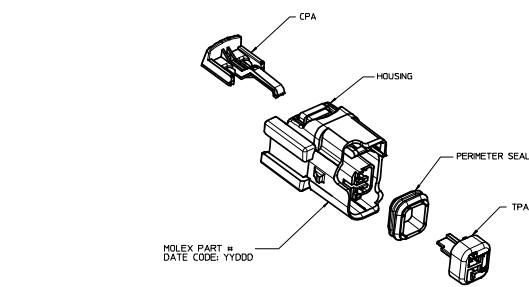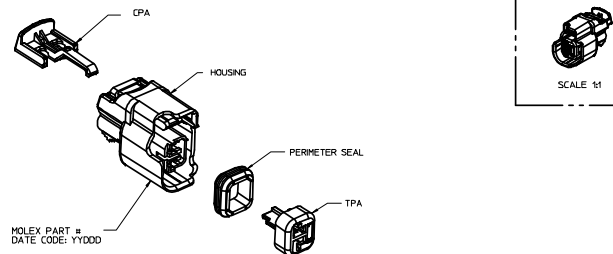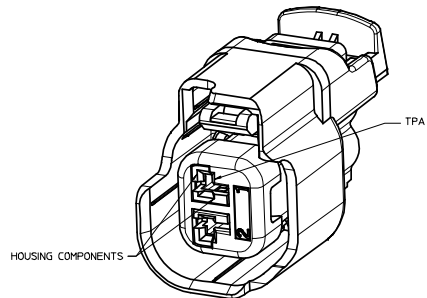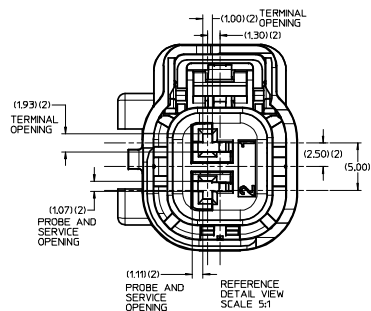

- NOTES: UNLESS OTHERWISE SPECIFIED
1. ASSEMBLY CONFORMS TO:
SAE/USCAR-12, REV. 2.
SAE/USCAR-2, REV. 4.
EXCEPT TPA REMOVAL FROM FINAL LOCK - SECOND CYCLE.
SHALL NOT BE LESS THAN 12 NEWTONS.
SAE/USCAR-20 DEC. 2001.
 2. DESIGNED TO MATE WITH DEVICE CONNECTION AS SPECIFIED IN EWCAP
DRAWING 150-5-002-1-201 REV. A 19-18-2003.
 3. ASSEMBLY SHIPPED WITH TPA IN PRE-LOCK POSITION (SEE SECTION B-8
PRE-LOCK). UPON FULL TERMINAL ASSEMBLY, EACH TPA MUST BE SNAPPED
INTO ITS FINAL-LOCK POSITION.
 4. OPTIONAL CPA SHOWN IN ALL VIEWS. SEE TABLES FOR SPECIFIC ASSEMBLY
OPTION AND NUMBER.
 5. KEYING OPTION AND ASSEMBLY MACHINE IDENTIFIER.
 6. RECYCLE CODE FOR PERIMETER SEAL: SILICON 50 DUDROMETER
HOUSING: PRE/PA-GP10
TPA/CPA: PBT-GP50
 7. SYSTEM TESTED USING ESB-HL123-A, 16/18, 20/22 AWG WIRE. MS-8288 AND
MS9502 ARE ACCEPTABLE ALTERNATIVES.

22	0.50	34083-2003	34083-0003	RIGHT	TIN	22	7158-3030-50	120-170	RED	E-1644-01	119-165	PINK
22	0.50	34083-3003	34083-1003	LEFT	TIN	22	7158-3030-50	120-170	RED	E-1644-01	119-165	
22	0.50	34081-2005	34081-0005	RIGHT	GOLD	22	7158-3030-50	120-170	RED	E-1644-01	119-165	
22	0.50	34081-3005	34081-1005	LEFT	GOLD	22	7158-3030-50	120-170	RED	E-1644-01	119-165	
20	0.75	34083-2002	34083-0002	RIGHT	TIN	18/20	7158-3031-90	163-240	BLUE	E-1644-00	160-210	GREEN
20	0.75	34083-3002	34083-1002	LEFT	TIN	18/20	7158-3031-90	163-240	BLUE	E-1644-00	160-210	
20	0.75	34081-2004	34081-0004	RIGHT	GOLD	18/20	7158-3031-90	163-240	BLUE	E-1644-00	160-210	
20	0.75	34081-3004	34081-1004	LEFT	GOLD	18/20	7158-3031-90	163-240	BLUE	E-1644-00	160-210	
18	1.0	34083-2002	34083-0002	RIGHT	TIN	18/20	7158-3031-90	163-240	BLUE	E-1644-00	160-210	GREEN
18	1.0	34083-3002	34083-1002	LEFT	TIN	18/20	7158-3031-90	163-240	BLUE	E-1644-00	160-210	
18	1.0	34081-2004	34081-0004	RIGHT	GOLD	18/20	7158-3031-90	163-240	BLUE	E-1644-00	160-210	
18	1.0	34081-3004	34081-1004	LEFT	GOLD	18/20	7158-3031-90	163-240	BLUE	E-1644-00	160-210	
16	1.5	34083-2001	34083-0001	RIGHT	TIN	14/16	7158-3031-90	163-240	BLUE	E-1644-02	210-250	YELLOW
16	1.5	34083-3001	34083-1001	LEFT	TIN	14/16	7158-3031-90	163-240	BLUE	E-1644-02	210-250	
16	1.5	34081-2003	34081-0003	RIGHT	GOLD	16	7158-3031-90	163-240	BLUE	E-1644-02	210-250	
16	1.5	34081-3003	34081-1003	LEFT	GOLD	16	7158-3031-90	163-240	BLUE	E-1644-02	210-250	
AWG	METRIC						YAZAKI P/N	WIRE OD RANGE	COLOR	OSR P/N	WIRE OD RANGE	COLOR
WIRE SIZE	PREFERRED TERMINAL	OPTIONAL TERMINAL	PAYOFF DIRECTION	PLATING	GRP		YAZAKI			OSR		

ENTER DESCRIPTION EC NO. UAU2008-0632 DRAWN BY LAM/0208/04/11 CHECKED BY LAM/0208/04/11 APPROVED BY LAM/0208/04/11	QUALITY SYMBOLS ▽-0 ▽-0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.10 ± --- 1 PLACE ± 0.3 ± --- ANGULAR ± 3°	DIMENSION STYLE MM ONLY DATE L.P.L.I.M. 2002/11/15 CHECKED BY DATE DKOEHLER 2002/11/15 APPROVED BY DATE CPENDLETT 2002/11/15	SCALE 2:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION	TITLE CONNECTOR ASSEMBLY 2-WAY FUEL 15MM FEMALE FUEL INJECTOR CONNECTOR MOLEX MOLEX INCORPORATED	MATERIAL NO. SD-34062-001 DOCUMENT NO. SHEET NO. OF 1
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						