

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0873810664](#)
Status: **Active**
Description: 2.00mm (.079") Pitch Milli-Grid™ Receptacle, Surface Mount, Top Entry, 0.38µm (15µ") Gold (Au) Plating, with Cap, without Locating Pegs, 6 Circuits, Lead-free

Documents:
[3D Model](#) [Product Specification PS-87380-002 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family PCB Receptacles
Series [87381](#)
Application Board-to-Board
Comments With Cap
Product Literature Order No 987650-1991
Product Name Milli-Grid™

Physical


Circuits (Loaded) 6
Circuits (maximum) 6
Color - Resin Black
Durability (mating cycles max) 25
Flammability 94V-0
Glow-Wire Compliant No
Lock to Mating Part None
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin-Lead
Material - Resin High Temperature Thermoplastic
Number of Rows 2
Orientation Vertical
PCB Locator No
PCB Retention None
Packaging Type Tube
Pitch - Mating Interface (in) 0.079 In
Pitch - Mating Interface (mm) 2.00 mm
Pitch - Term. Interface (in) 0.079 In
Pitch - Term. Interface (mm) 2.00 mm
Plating min: Mating (µin) 15
Plating min: Mating (µm) 0.38
Plating min: Termination (µin) 50
Plating min: Termination (µm) 1.27
Polarized to PCB No
Surface Mount Compatible (SMC) N/A
Temperature Range - Operating -55°C to +105°C
Termination Interface: Style Surface Mount

Electrical

Current - Maximum per Contact 1.9A
Voltage - Maximum 125V

Solder Process Data

Duration at Max. Process Temperature (seconds) 12

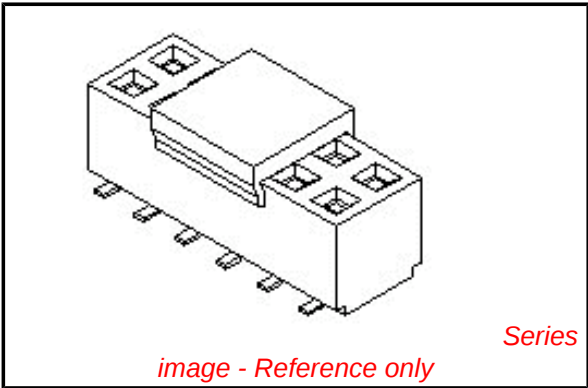

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[87381Series](#)

Mates With

[87758](#) Vertical, Through Hole, Stackable
PCB Header, [87759](#) Vertical, Surface
Mount, Stackable PCB Header, [87760](#)
Right Angle, Through Hole, Stackable PCB
Header, [87831](#) Vertical, Through Hole PCB
Header, [87832](#) Vertical, Surface Mount PCB

Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Product Specification	PS-87380-002
Sales Drawing	SD-87381-**6*

This document was generated on 04/09/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

F

E

D

C

B

A

10

9

8

7

6


5

4




3

2

1

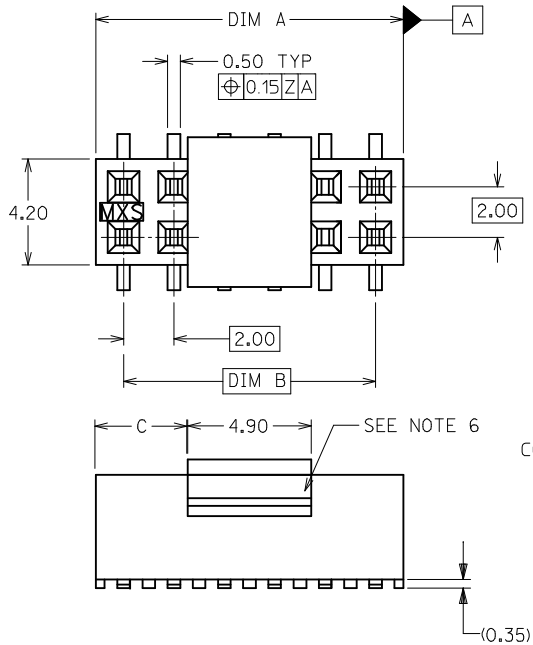

PART NO. LEGEND
FOR TUBE PACKAGING ONLY

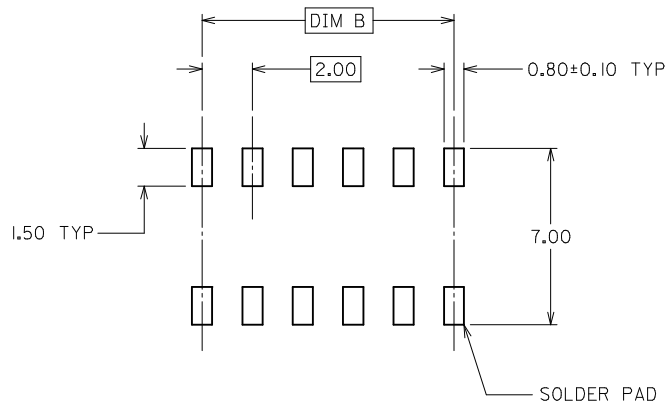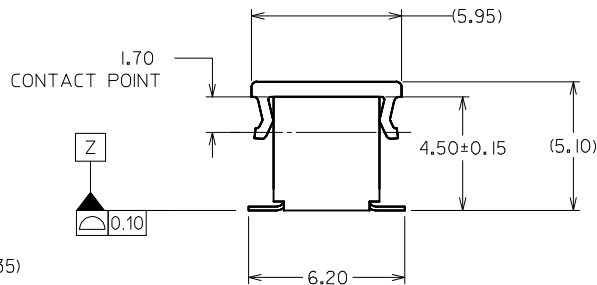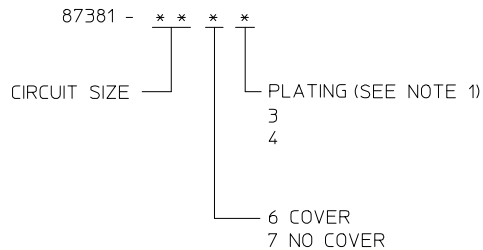

RECOMMENDED PCB LAYOUT

PART NUMBER (SEE NOTE 5)	CKT. SIZE	DIM A	DIM B	DIM C
87381-06**	6	6.00	4.00	0.55
87381-08**	8	8.00	6.00	1.55
87381-10**	10	10.00	8.00	2.55
87381-12**	12	12.00	10.00	3.55
87381-14**	14	14.00	12.00	4.55
87381-16**	16	16.00	14.00	5.55
87381-18**	18	18.00	16.00	6.55
87381-20**	20	20.00	18.00	7.55
87381-22**	22	22.00	20.00	8.55
87381-24**	24	24.00	22.00	9.55
87381-26**	26	26.00	24.00	10.55
87381-28**	28	28.00	26.00	11.55
87381-30**	30	30.00	28.00	12.55
87381-32**	32	32.00	30.00	13.55
87381-34**	34	34.00	32.00	14.55
87381-36**	36	36.00	34.00	15.55
87381-38**	38	38.00	36.00	16.55
87381-40**	40	40.00	38.00	17.55
87381-42**	42	42.00	40.00	18.55
87381-44**	44	44.00	42.00	19.55
87381-46**	46	46.00	44.00	20.55
87381-48**	48	48.00	46.00	21.55
87381-50**	50	50.00	48.00	22.55

NOTES:

- PLATING FINISH:
3 - 0.76um MIN. GOLD IN CONTACT AREA 1.27um MIN. TIN
IN SOLDER TAIL AREA BOTH OVER 1.27um MIN. NICKEL OVERALL
4 - 0.38um MIN. GOLD IN CONTACT AREA 1.27um MIN. TIN
IN SOLDER TAIL AREA BOTH OVER 1.27um MIN. NICKEL OVERALL
- 12 CKT SIZE SHOWN FOR ASSY ILLUSTRATION ONLY. (SEE CHART FOR ALL PART SIZES), 6 CKT & 30 CKT ILLUSTRATED FOR TAPE/REEL VERSION ON SHT 2.
- PRODUCT SPECIFICATION PS-87380 APPLIES.
- COPLANARITY OF SOLDER TAILS ARE TO BE MEASURED BY RESTING THE PART ON A FLAT GAUGE SURFACE.
- TUBE PACKAGING STANDARD.
- COVER IS OPTIONAL, SEE LEGEND.
- PARTS SHALL BE PACKED IN MOISTURE BARRIER BAG.
- REFER SHT 3 FOR P/N: 87381-6000 T&R ILLUSTRATION.

ADD P/N: 87381-3200 EC NO: S2009-0725 DRWN:SKANG CHKD:ATSEE APPR:MLONG REV E8			DESCRIPTION ▽=0 ◇=0	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY DATE JAMES 1998/01/08		TITLE MGRID, TOP ENTRY RECEPT. 4.50MM HT., SMT					
		4 PLACES		± ---	± ---	CHECKED BY DATE LCHANG 1999/04/23							
		3 PLACES		± ---	± ---	APPROVED BY DATE SQUEK 1999/04/26		molex MOLEX INCORPORATED					
		2 PLACES		± 0.20	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-87381-***6*		SHEET NO. 1 OF 4	
		1 PLACE		± ---	± ---			SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
				ANGULAR ± 3 °									

	10	9	8	7	6	5	4	3	2	1																																										
F							CKT SIZE	PART NO. WITH CAP IN TUBE	PART NO. WITH CAP IN TAPE / REEL	W	So	Ao	F	Bo	Ko	T&R TYPE (SHT 2)	T&R QTY PER REEL	F																																		
							6	87381-0664	87381-9002	24	-	7.00	11.50	6.50	5.30	A	500																																			
							8	87381-0864	87381-9003	24	-	7.00	11.50	8.50	5.30	A	600																																			
							10	87381-1064	87381-9005	24	-	7.00	11.50	10.50	5.30	A	680																																			
							14	87381-1464	87381-9006	32	28.40	7.20	14.20	14.50	5.30	B	750																																			
							16	87381-1664	87381-9004	32	28.40	7.20	14.20	16.50	5.30	B	800																																			
							18	87381-1864	87381-1800	32	28.40	7.20	14.20	18.50	5.30	B	750																																			
E							20	87381-2063	87381-2000	32	28.40	7.20	14.20	20.50	5.30	B	800																																			
							22	87381-2264	87381-2200	44	40.40	7.20	20.20	22.50	5.30	B	500	E																																		
							30	87381-3064	87381-3000	44	40.40	7.20	20.20	30.50	5.30	B	500																																			
							32	87381-3264	87381-3200	44	40.40	7.20	20.20	32.50	5.30	B	500																																			
							44	87381-4464	87381-4400	56	52.40	7.20	26.20	44.50	5.30	B	500																																			
							46	87381-4664	87381-4600	72	68.40	7.20	34.20	46.50	5.30	B	750																																			
D							50	87381-5063	87381-5030	72	68.40	7.20	34.20	50.50	5.30	B	500																																			
							50	87381-5064	87381-5000	72	68.40	7.20	34.20	50.50	5.30	B	500	D																																		
C																								C																												
B																								B																												
A																																									A											

