


**5-Output Switching Regulator  
BA6132F**

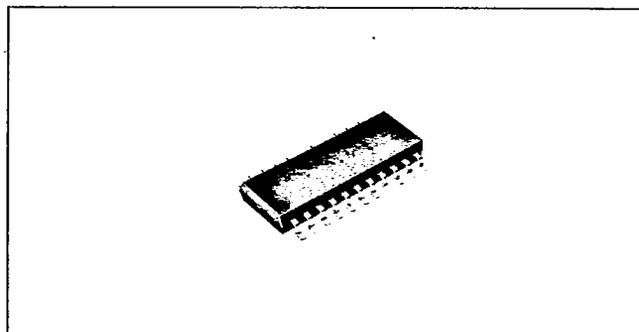

**Dimensions (Unit: mm)**

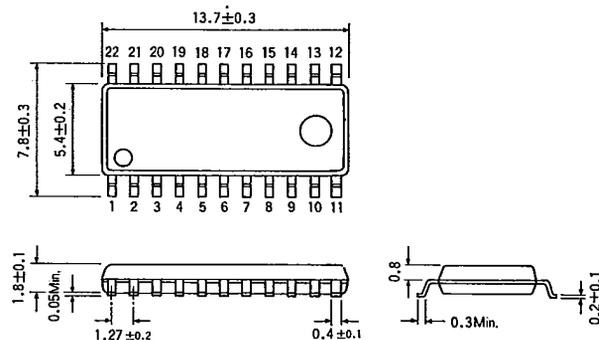


Fig. 1

The BA6132F is a monolithic switching regulator which contains five independent switching regulator blocks.

**Features**

1. All the control circuitry required for the switching regulators is internally implemented.
2. High efficiency PWM type circuitry.
3. Output On/Off control capability (only one block).
4. Low current consumption (7 mA typ.)
5. Reference can be externally controlled.

**Block Diagram**

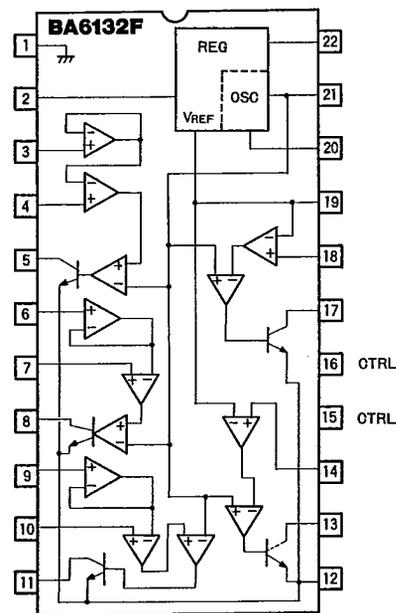


Fig. 2

**Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Limits	Unit
Supply voltage	V <sub>CC</sub>	18	V
Power dissipation	P <sub>d</sub>	600*	mW
Operating temperature range	T <sub>opr</sub>	-20 ~ 75	°C
Storage temperature range	T <sub>stg</sub>	-55 ~ 125	°C
REF control voltage	V <sub>rc</sub>	5	V

\*Derating is done at 6mW/°C for operation above Ta=25°C.

Switching Regulators

**Control Mode**

Control pin	Output pin	Pin 5(M3)	Pin 8(M2)	Pin 11(M1)	Pin 13(9V)	Pin 17(5V)
Pin 15;L, pin 16;L		ON	ON	ON	ON	ON
Pin 15;L, pin 16;H		OFF	OFF	OFF	ON	ON
Pin 15;H, pin 16;L		OFF	OFF	OFF	OFF	ON
Pin 15;H, pin 16;H		OFF	OFF	OFF	OFF	ON

Blocks 1 to 3 allow external control of the error amplifier's reference voltage, providing a wide output control range. The reference input pins for blocks 4 and 5 are internally connected to  $V_{REG}$  (pin 19).

**Electrical Characteristics (Unless otherwise specified,  $T_a=25^\circ\text{C}$ ,  $V_{CC}=12\text{V}$ )**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Circuit current	$I_{CC}$	—	7	—	mA	Rated load
Oscillation frequency temperature regulation	$f_{OSC}/\Delta T$	—	$\pm 3$	—	%	$T_a = -10 \sim 60^\circ\text{C}$
Maximum oscillation frequency	$f_{max}$	—	100	—	kHz	—
Pins 5, 8, 11 drive current	$I_{5,8,11}$	—	20	—	mA	Maximum drive current
Pin 13 drive current	$I_{13}$	—	30	—	mA	Maximum drive current
Pin 17 drive current	$I_{17}$	—	10	—	mA	Maximum drive current
Control voltage-high	HCTRL	—	2.7~7	—	V	—
Control voltage-low	HCTRL	—	0~0.9	—	V	—

**Application Example**

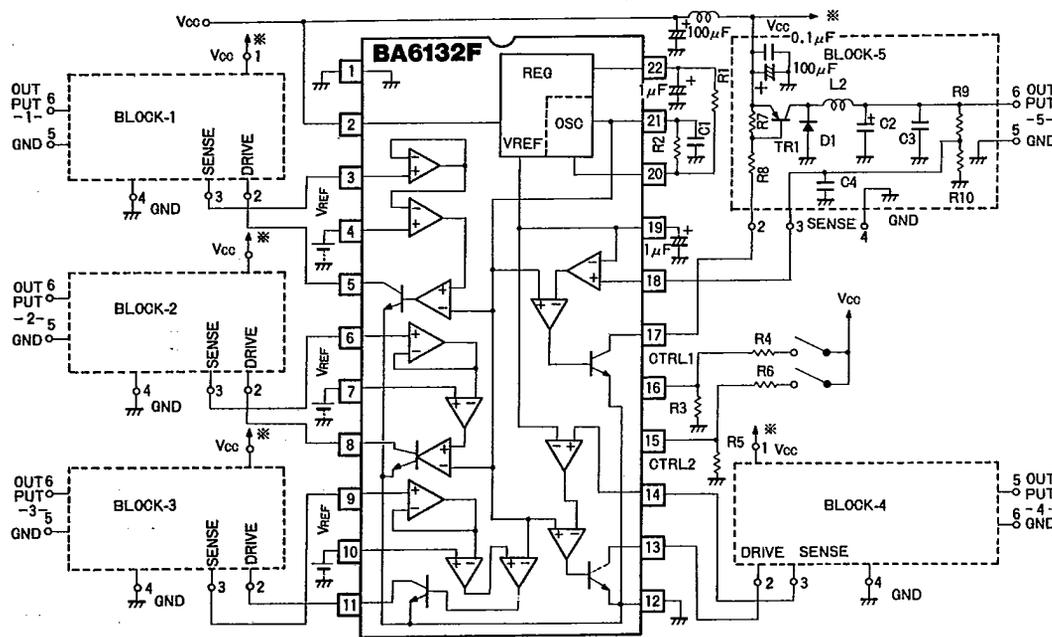


Fig. 3