

Low-current audio headphone driver

BA3574BFS

The BA3574BFS is a headphone driver with a fixed-gain bass boost circuit and an AVC circuit that keeps the output below a fixed level. It features low current consumption, and low output noise, and is ideal for use in portable digital audio equipment.

● Applications

Portable CD and MD players

● Features


- 1) Low current consumption (when $V_{cc} = 2.4V$, the quiescent current is 4.9mA).
- 2) Suitable for use in digital audio equipment (voltage gain : $G_v = 11.8\text{dB}$, output noise voltage : $V_{no} = -102\text{dBm}$ typ.).
- 3) Bass boost circuit.
- 4) AVC (Auto Volume Control) circuit, for output limiting.
- 5) Standby switch.
- 6) Mute switch.
- 7) Ripple filter.
- 8) No output coupling capacitor required.
- 9) Beep circuit.
- 10) SSOP-A20 package.

■ 7828999 0019440 754 ■

ROHM

575

● Block diagram

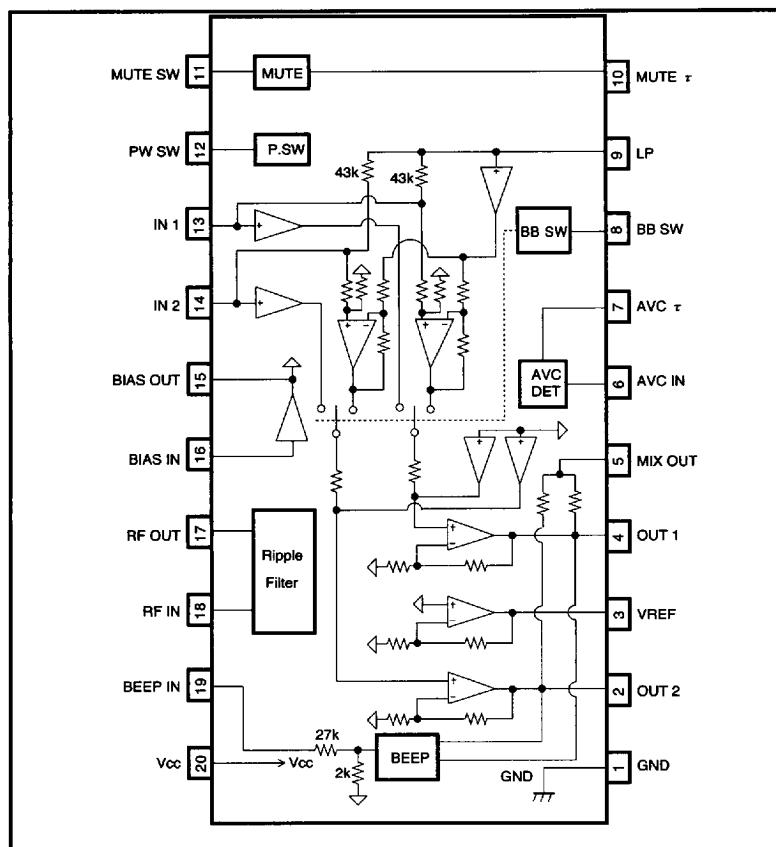● Absolute maximum ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Limits	Unit
Supply voltage	V _{cc}	9.0	V
Power dissipation	P _d	600*	mW
Operating temperature	T _{opr}	-25~75	°C
Storage temperature	T _{stg}	-55~125	°C

* Reduced by 6.0mW for each increase in T_a of 1°C over 25°C .

● Recommended operating conditions ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	V _{cc}	1.7	~	3.6	V

* When $V_{CC} \geq 3.6V$, do not exceed the maximum allowable output power (see Fig. 5).

■ 7828999 0019441 690 ■

ROHM

●Electrical characteristics (Unless otherwise specified, Ta = 25°C, V_{CC} = 2.4V, R_L = 16Ω, f = 1kHz, and BB = OFF)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Circuit current 1	I _{CC1}	—	0.2	3.0	μA	V _{IN} =0, R _L =OPEN, PWSW=OFF
Circuit current 2	I _{CC2}	—	3.1	4.7	mA	V _{IN} =0, R _L =OPEN, MUTE=ON
Circuit current 3	I _{CC3}	—	4.9	7.5	mA	V _{IN} =0, R _L =OPEN
Circuit current 4	I _{CC4}	—	5.0	7.8	mA	V _{IN} =0, R _L =OPEN, BB=ON
Circuit current variation	Δ I _{CC}	—	0.3	2.0	mA	I _{CC4} (R _L =16Ω) — I _{CC4} (R _L =OPEN)
Voltage gain	G _V	9.8	11.8	13.8	dB	
Rated output power 1	P _{OUT1}	19	40	—	mW	THD=10%
Rated output power 2	P _{OUT2}	8	15	—	mW	THD=10%, V _{CC} =1.8V
Total harmonic distortion	THD	—	0.1	0.5	%	V _O =0.3V _{RMS}
Output noise voltage 1	V _{NO1}	—	-102	-97	dBm	IHF-A, R _g =0
Output noise voltage 2	V _{NO2}	—	-89	-84	dBm	IHF-A, R _g =0, BB=ON
Input resistance	R _{IN}	11.5	16.8	22.0	kΩ	
Ripple rejection 1	R _{R1}	73	79	—	dB	f _{RR} =100Hz, V _{RR} =-20dBm, R _g =0
Ripple rejection 2	R _{R2}	53	63	—	dB	R _g =0, V _{RR} =-20dBm, BB=ON f _{RR} =100Hz
Ripple rejection 3	R _{R3}	66	79	—	dB	R _g =0, V _{RR} =-20dBm, V _{CC} =1.8V f _{RR} =100Hz
Ripple rejection 4	R _{R4}	43	58	—	dB	f _{RR} =100Hz, V _{RR} =-20dBm, V _{CC} =1.8V BB=ON, R _g =0
Bass boost	BB	4.5	7.0	9.5	dB	f=100Hz, V _{IN} =-30dBV
AVC level	V _{AVC}	-42.5	-40.5	-38.5	dBV	V _{IN} =-30dBV
Channel separation	CS	24	44	—	dB	V _O =-10dBV
Mute level	ML	80	90	—	dB	V _{IN} =-20dBV
Beep output voltage	V _{BEEP}	1.1	3.0	5.8	mV _{RMS}	V _{BEEP IN} =0dBV
Power ON voltage	V _{PW ON}	—	0.95	1.4	V	
Power ON pin current	I _{PW SW}	—	105	150	μA	V _{PW SW} =3.0V
Mute ON voltage	V _{MUTE ON}	—	0.95	1.4	V	
Mute ON pin current	I _{MUTE}	—	105	150	μA	V _{MUTE} =3.0V

© Not designed for radiation resistance.

Bass boost systems


Audio accessory components

■ 7828999 0019442 527 ■

ROHM

577

● Measurement circuit

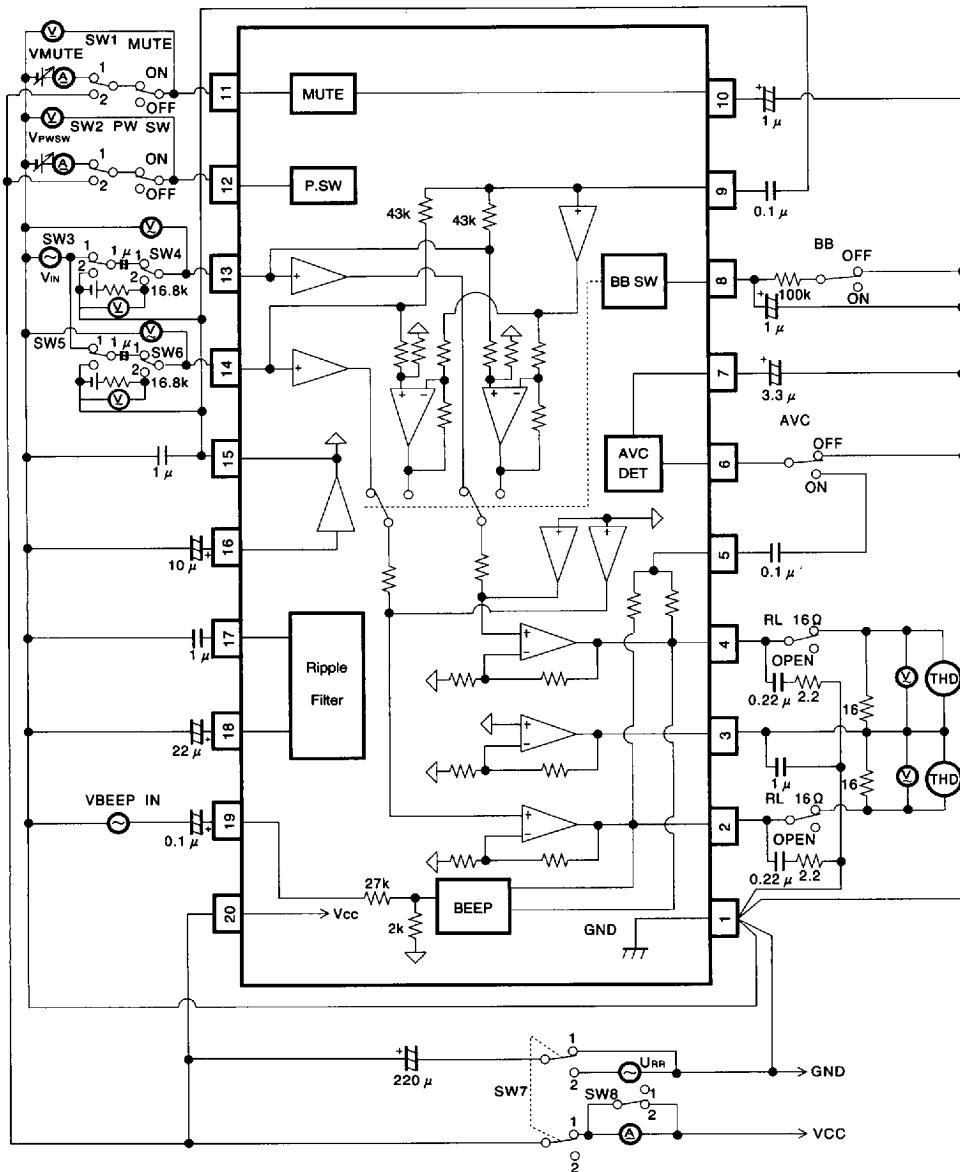

Units:

Resistance (carbon): : Ω (±1%)

Capacitance (film): : F (±1%)

Capacitance (electrolytic): F (±5%)

Fig. 1

■ 7828999 0019443 463 ■

ROHM

●Measurement circuit switch table

Parameter	Symbol	MUTE	PwSw	BB	AVC	R _L	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Circuit current 1	I _{cc1}	OFF	OFF	OFF	OFF	OPEN	2	2	2	1	2	1	1	1
Circuit current 2	I _{cc2}	ON	ON	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Circuit current 3	I _{cc3}	OFF	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Circuit current 4	I _{cc4}	↓	↓	ON	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Circuit current variation	Δ I _{cc}	↓	↓	↓	↓	16Ω OPEN	↓	↓	↓	↓	↓	↓	↓	↓
Voltage gain	G _v	↓	↓	OFF	↓	16Ω	↓	↓	1	↓	1	↓	↓	2
Rated output power 1	P _{out1}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Rated output power 2	P _{out2}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Total harmonic distortion	THD	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Output noise voltage 1	V _{No1}	↓	↓	↓	↓	↓	↓	↓	2	↓	2	↓	↓	↓
Output noise voltage 2	V _{No2}	↓	↓	ON	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Input resistance	R _{IN}	↓	↓	OFF	↓	↓	↓	↓	1	2	1	2	↓	↓
Ripple rejection 1	RR1	↓	↓	↓	↓	↓	↓	↓	2	1	2	1	2	↓
Ripple rejection 2	RR2	↓	↓	ON	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Ripple rejection 3	RR3	↓	↓	OFF	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Ripple rejection 4	RR4	↓	↓	ON	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Bass boost	BB	↓	↓	↓	↓	↓	↓	↓	1	↓	1	↓	1	↓
AVC level	V _{AVC}	↓	↓	OFF	ON	↓	↓	↓	↓	↓	↓	↓	↓	↓
Channel separation	CS	↓	↓	↓	OFF	↓	↓	↓	1 2	↓	2 1	↓	↓	↓
Mute level	ML	ON	↓	↓	↓	↓	↓	↓	1	↓	1	↓	↓	↓
Beep output voltage	V _{BEEP}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Power ON voltage	V _{PW.ON}	OFF	↓	↓	↓	↓	1	1	↓	↓	↓	↓	↓	↓
Power ON pin current	I _{PW.SW}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Mute ON voltage	V _{MUTE.ON}	ON	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓
Mute ON pin current	I _{MUTE}	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓


■ 7828999 0019444 3TT ■

ROHM

579

● Application example 1

(headphone stereo with bass boost and output limiting)

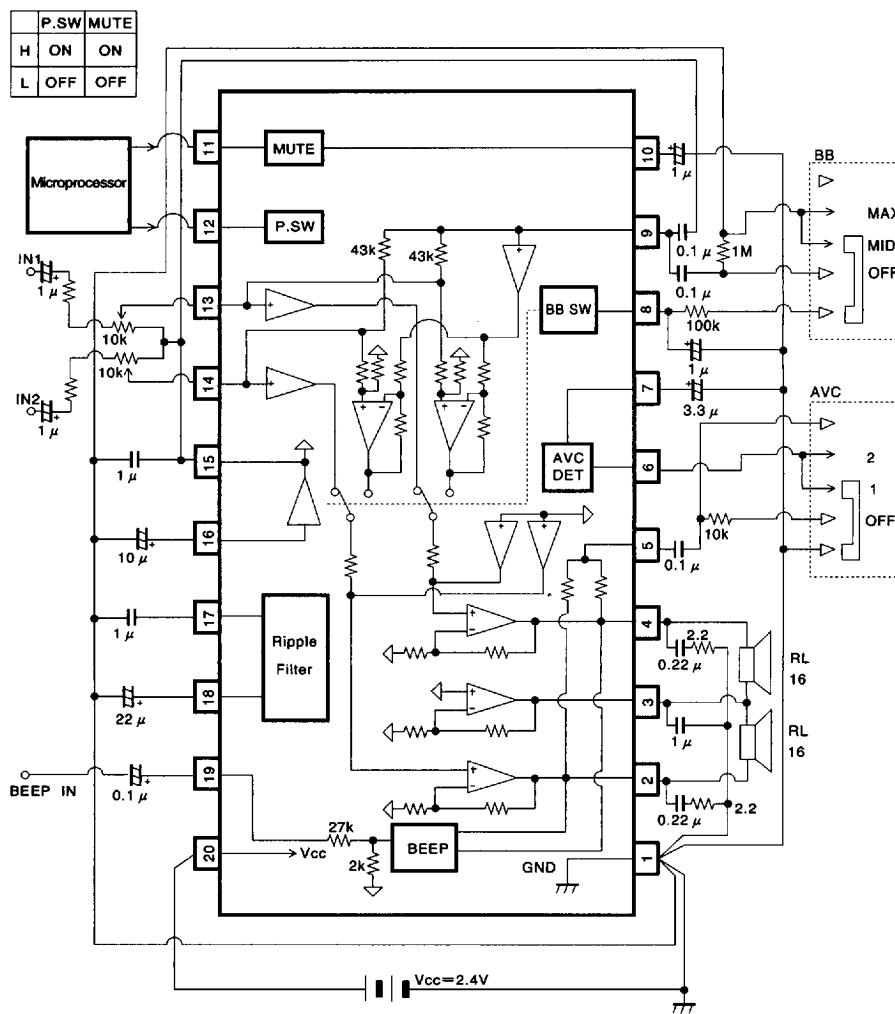


Units:
 Resistance (carbon) : Ω (±5%)
 Capacitance (film) : F (±10%)
 Capacitance (electrolytic) : F (±20%)

Fig. 2

■ 7828999 0019445 236 ■

● Application example 2

(headphone stereo with bass boost)

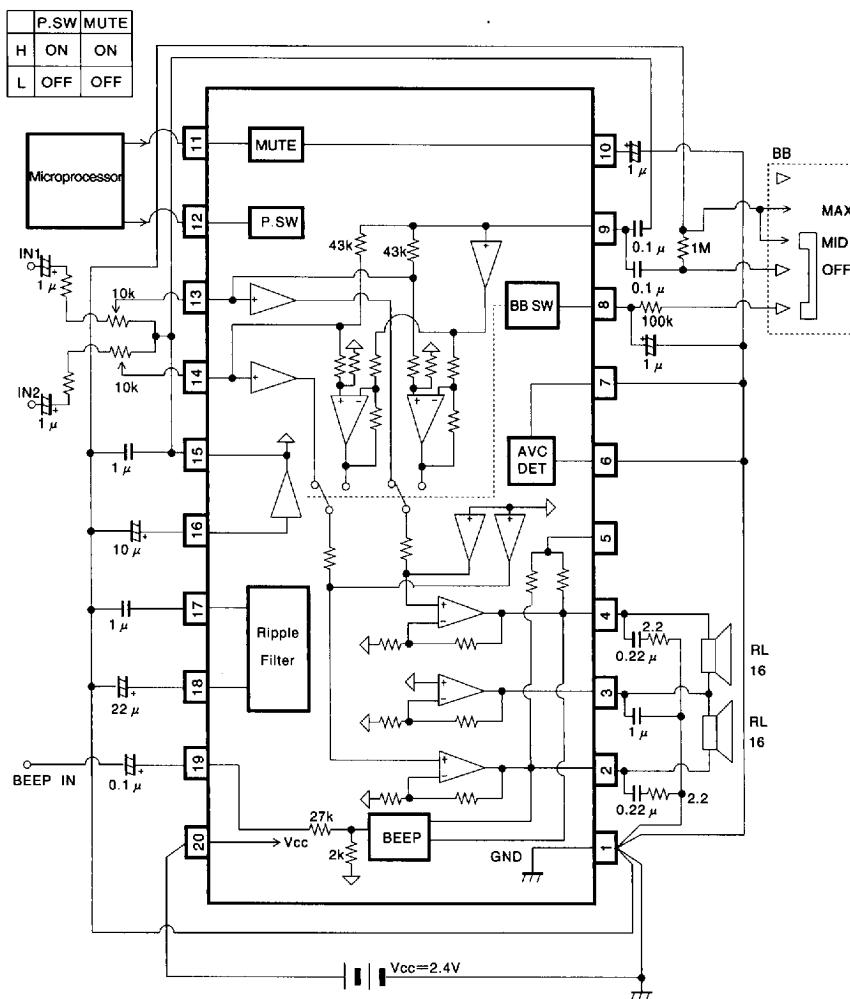

Units:
 Resistance (carbon) : Ω ($\pm 5\%$)
 Capacitance (film) : F ($\pm 10\%$)
 Capacitance (electrolytic) : F ($\pm 20\%$)


Fig. 3

■ 7828999 0019446 172 ■

ROHM

● Application example 3

(headphone stereo)

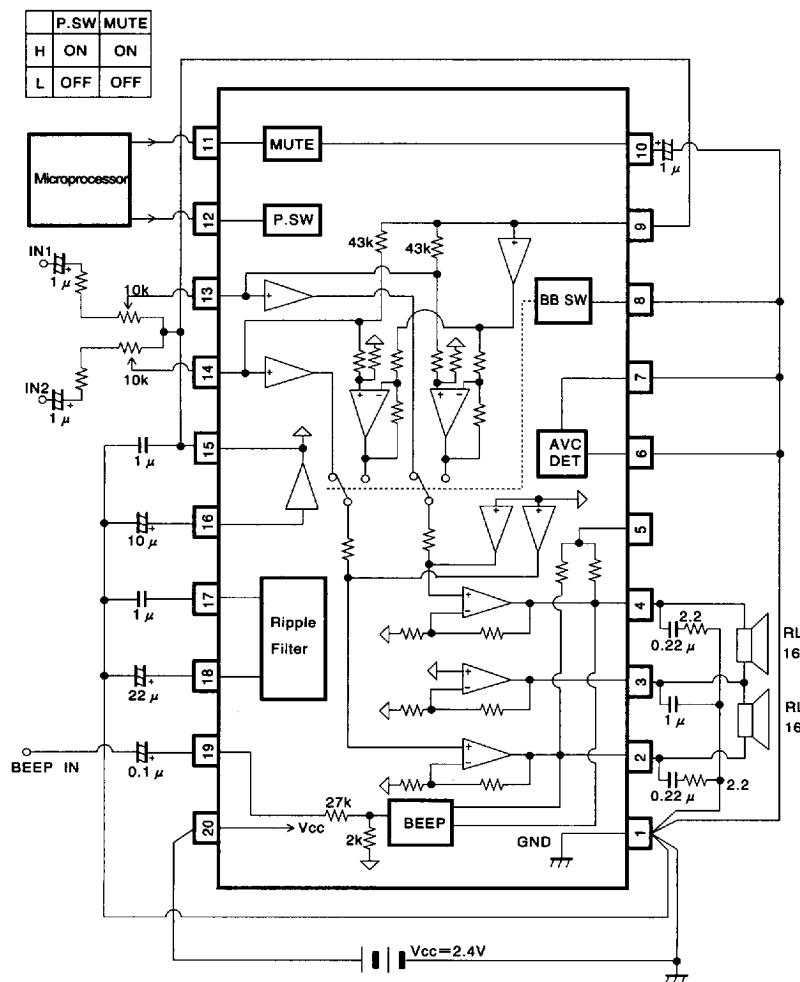

Units:
 Resistance (carbon) : Ω ($\pm 5\%$)
 Capacitance (film) : F ($\pm 10\%$)
 Capacitance (electrolytic) : F ($\pm 20\%$)

Fig. 4

■ 7828999 0019447 009 ■

ROHM

● Operation notes

1. Application circuits

Provided the recommended circuit constants are used, the application circuits should function correctly. However, we recommend that you confirm the characteristics of the circuits in actual use. If you change the circuit constants, check both the static and transient characteristics of the circuit, and allow sufficient margin to accommodate variations between both ICs and external components. In particular, the capacitors connected to the OUT 1, OUT 2, and VREF pins must have low impedance at high frequency.

2. Wiring of PCB

The PCB pattern for the external components should be designed carefully to prevent oscillation and degradation of the circuit characteristics. Keep the wiring tracks as short as possible, and ensure that there is no impedance between the common connections.

3. Recommended power supply voltage range

The curves in Fig. 5 below show the maximum allowable power output (P_o (Max.) / CH) plotted against the supply voltage (V_{cc}) for different values of ambient temperature (T_a). When $V_{cc} \geq 3.6V$, operate the IC in the region below the dotted line, and do not exceed it.

If the maximum allowable power output for each channel (P_o (Max.) / CH) is exceeded, the internal power consumption will exceed the power dissipation capacity of the package, and destroy the IC.


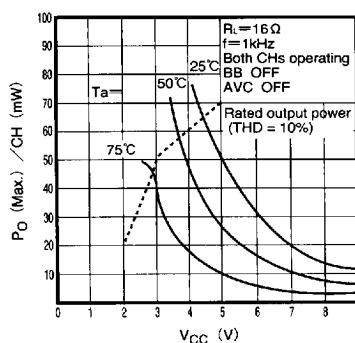


Fig. 5 Maximum allowable power output per channel (P_o (Max.) / CH) vs. supply voltage (V_{cc}).

4. Switching noise prevention

Operate the BA3574BFS according to the timing diagram given in Fig. 6 below to prevent a "pop" sound from being output to the headphones.

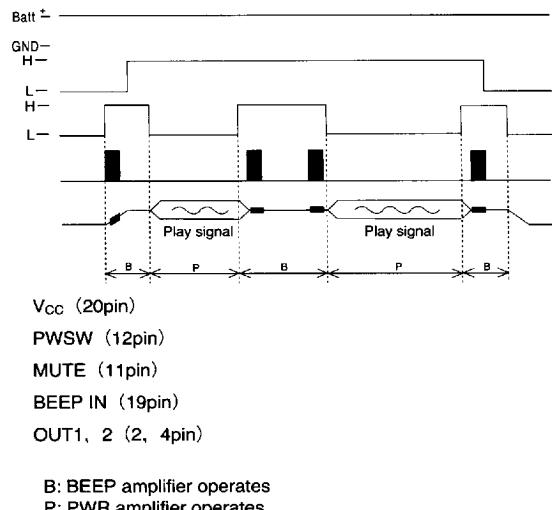

PWSW (12pin)	MUTE (11pin)	PWR AMP	BEEP AMP
L	L	OFF	OFF
L	H	OFF	ON
H	H	OFF	ON
H	L	ON	OFF

Fig. 6

5. BIAS OUT (pin 15)

The internal operating point voltage of the BA3574BFS is supplied from BIAS OUT (pin 15). The current capacity is limited, so do not use this as the operating point for external circuits.

■ 7828999 0019448 T45 ■

ROHM

● Electrical characteristics curves

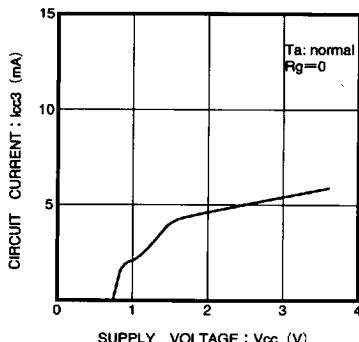
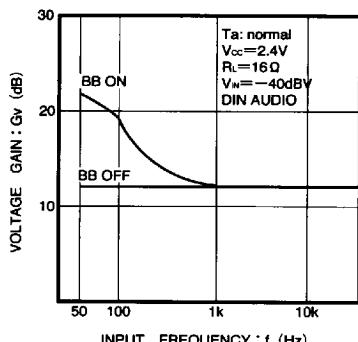
Fig. 7 Quiescent current vs.
supply voltage

Fig. 8 Voltage gain vs. frequency

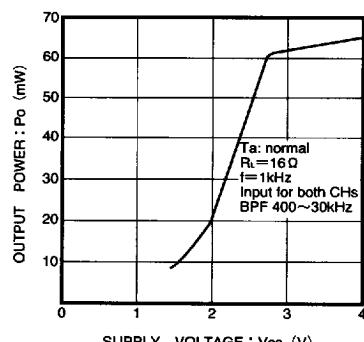
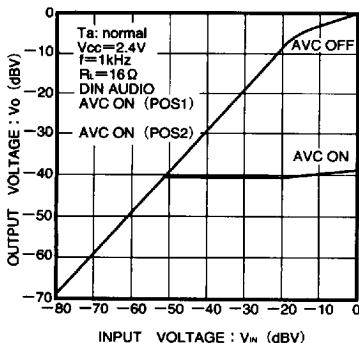
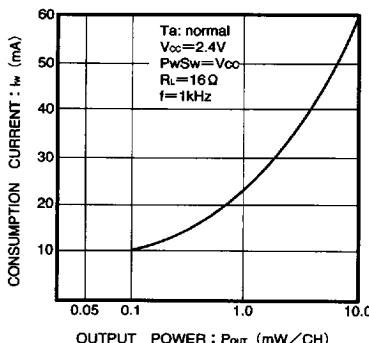
Fig. 9 Rated output power vs.
supply voltage


Fig. 10 AVC characteristics

Fig. 11 Consumption current vs.
output power

■ 7828999 0019449 981 ■

ROHM

● External dimensions (Unit: mm)

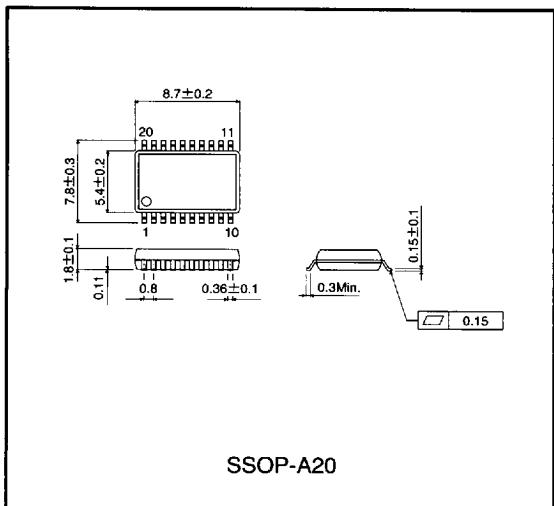

SSOP-A20

■ 7828999 0019450 6T3 ■

ROHM

585