

# AN6880


## Servo Motor Control Circuit

### ■ Outline

The AN6880 is an integrated circuit designed for control of a servo motor.

### ■ Features


- Wide range of operating supply voltage : 3.5~6.0V
- Low quiescent current
- Large power dissipation :  $P_{d}=600\text{mW}$  max.
- Separate control for deadband and pulse stretch
- Single supply, bi-directional operation

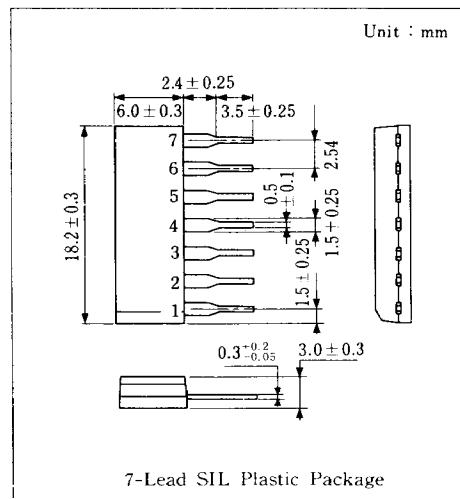

### ■ Pin

Pin No.	Pin Name
1	Mono. Multi.
2	Input
3	Output
4	GND
5	Output
6	V <sub>CC</sub>
7	Pulse Width Adj.

### ■ Block Diagram

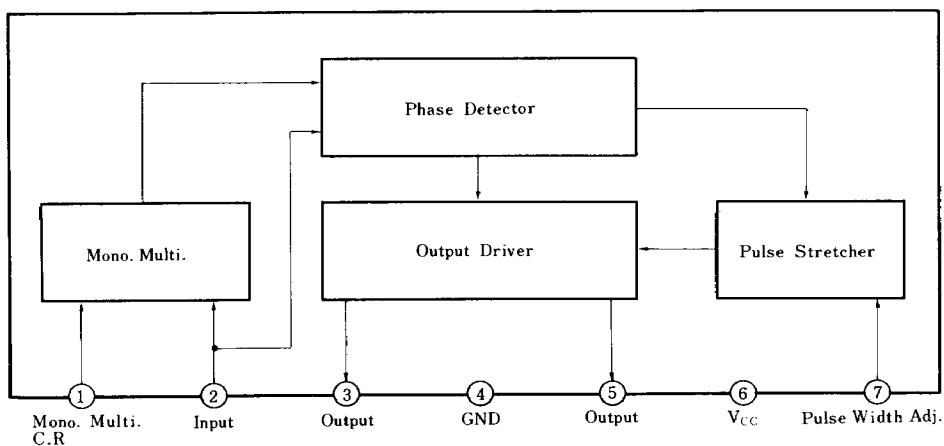


■ Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )


Item		Symbol	Rating		Unit
Supply Voltage		$V_{CC}(V_{6-4})$	6.5		V
Output Current	$I_3, I_5$		-400	400	mA
Power Dissipation	$P_D$		600		mW
Temperature	Operating Ambient Temperature		$T_{opr}$	-10 ~ +60	°C
	Storage Temperature		$T_{stg}$	-55 ~ +150	°C




■ Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )

Item	Symbol	Test Circuit	Condition	min.	typ.	max.	Unit
Supply Voltage	$V_{CC}$			3.5		6	V
Quiescent Circuit Current	$I_{CQ}$		$V_{6-4} = 6\text{V}, V_{2-4} = 0\text{V}, V_{7-4} = 2.5\text{V}$		4		mA
Output Voltage	High level $V_{OH(1)}$	1	$V_{6-4} = 6\text{V}$ , Load 10Ω between Pin③ and Pin⑤	4.6			V
	Low level $V_{OL(1)}$	1				0.7	V
Output Voltage	High level $V_{OH(2)}$	2	$V_{6-4} = 6\text{V}$ , Load 10Ω between Pin③ and Pin⑤	4.6			V
	Low level $V_{OL(2)}$	2				0.7	V
Output Voltage	High level $V_{OH(3)}$	1	$V_{6-4} = 3.5\text{V}$ , Load 10Ω between Pin③ and Pin⑤	2.2			V
	Low level $V_{OL(3)}$	1				0.45	V
Output Voltage	High level $V_{OH(4)}$	2	$V_{6-4} = 3.5\text{V}$ , Load 10Ω between Pin③ and Pin⑤	2.2			V
	Low level $V_{OL(4)}$	2				0.45	V
Input Voltage	High level $I_{IH1}$		$V_{6-4} = 6\text{V}, V_{1-4} = 2\text{V}$ $V_{2-4} = 1.7\text{V}$			5	$\mu\text{A}$
	Low level $I_{IH1}$		$V_{6-4} = 6\text{V}, V_{1-4} = 2\text{V}$ $V_{2-4} = 0.3\text{V}$	-2		2	$\mu\text{A}$

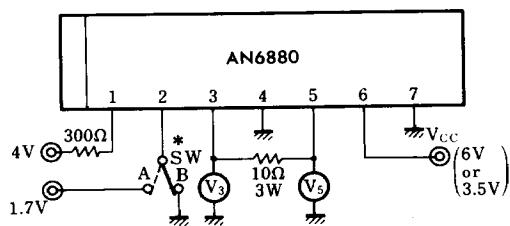Test Circuit 1 ( $V_{OH(1)}, V_{OL(1)}, V_{OH(3)}, V_{OL(3)}$ )

\* Measurement is made by changing SW from A to B to set Pin③ to "H" and Pin⑤ to "L".

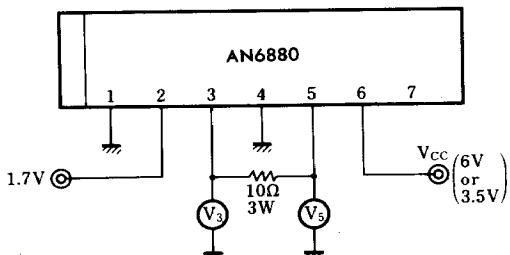Test Circuit 2 ( $V_{OH(2)}, V_{OL(2)}, V_{OH(4)}, V_{OL(4)}$ )

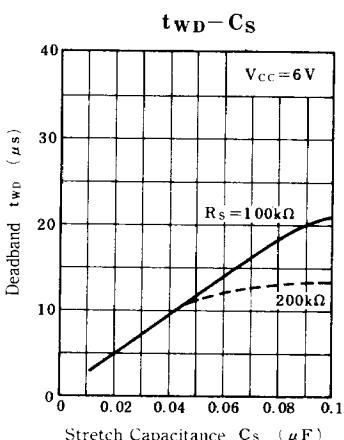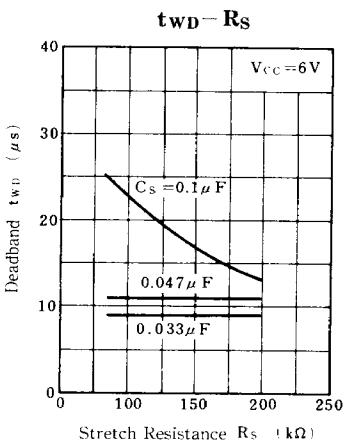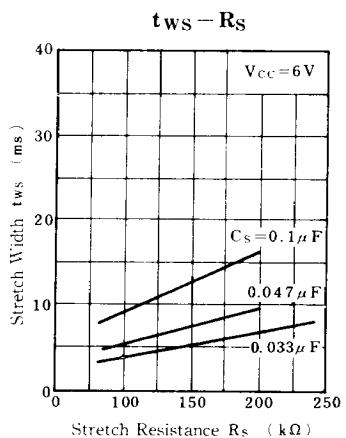

## ■ Application Circuit

