

January 7, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:<http://www.semtech.com>

## AXIAL LEADED HERMETICALLY SEALED HIGH VOLTAGE FAST RECTIFIER DIODE

## QUICK REFERENCE DATA


- Low reverse recovery time
- High thermal shock resistance
- Glass passivated for hermetic sealing
- Low switching losses
- Soft, non-snap off, recovery characteristics

- $V_R = 2500V$
- $I_F = 800mA$
- $t_{rr} = 350nS$
- $I_R = 1\mu A$

## ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)

	Symbol	11PF25	Unit
Working reverse voltage	$V_{RWM}$	2500	V
Repetitive reverse voltage	$V_{RRM}$	2750	V
Surge reverse voltage	$V_{RSM}$	3000	V
Average forward current (@ 55°C in oil)	$I_{F(AV)}$	0.80	A
Repetitive surge current (@ 55°C)	$I_{FRM}$	10	A
Non-repetitive surge current ( $t_p = 8.3mS$ , @ $V_R$ & $T_{jmax}$ )	$I_{FSM}$	27	A
Storage temperature range	$T_{STG}$	-65 to +165	°C
Operating temperature range	$T_{OP}$	-65 to +165	°C


## MECHANICAL

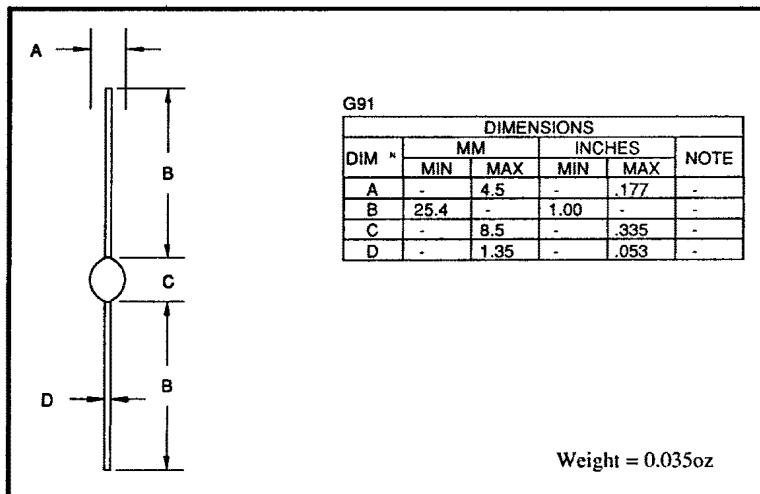

January 7, 1998

## CHARACTERISTICS (@ 25°C unless otherwise specified)

	Symbol	11PF25	Unit
Average forward current max. (pcb mounted; TA = 55°C) for sine wave for square wave (d = 0.5)	IF(AV) IF(AV)	0.32 0.34	A A
Average forward current max. (unstirred oil at 55°C) for sine wave for square wave	IF(AV) IF(AV)	0.76 0.80	A A
I <sup>2</sup> t for fusing (t = 8.3mS) max.	I <sup>2</sup> t	3.0	A <sup>2</sup> S
Forward voltage drop max. @ IF = 2.0A, T <sub>j</sub> = 25°C	V <sub>F</sub>	6.50	V
Reverse current max. @ VRWM, T <sub>j</sub> = 25°C @ VRWM, T <sub>j</sub> = 100°C	I <sub>R</sub> I <sub>R</sub>	1.0 10	µA µA
Reverse recovery time max. 50mA I <sub>F</sub> , 100mA I <sub>R</sub> , 25mA I <sub>RR</sub> .	t <sub>rr</sub>	350	nS
Junction capacitance typ. @ V <sub>R</sub> = 5V, f = 1MHz	C <sub>j</sub>	9.5	pF
Thermal resistance - junction to oil Stirred oil Unstirred oil	R <sub>θJO</sub> R <sub>θJO</sub>	19 25	°C/W °C/W
Thermal resistance - junction to amb. on 0.06" thick pcb. 1oz copper.	R <sub>θJA</sub>	81	°C/W

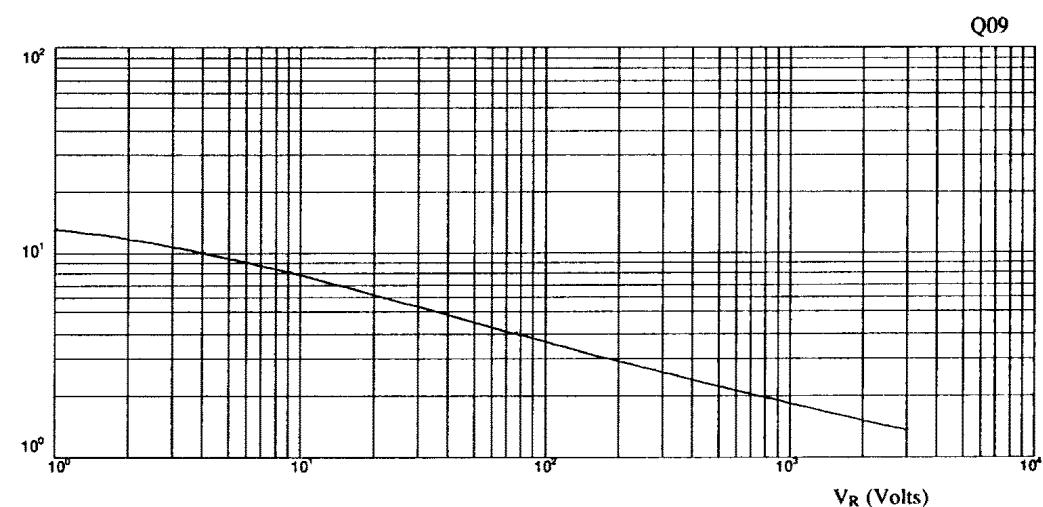Fig 1 Junction capacitance  
against reverse voltage.

January 7, 1998

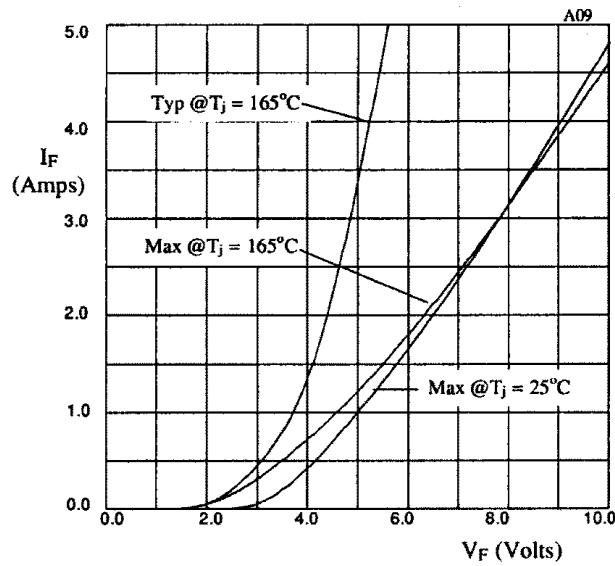


Fig 2. Forward voltage drop as a function of forward current.

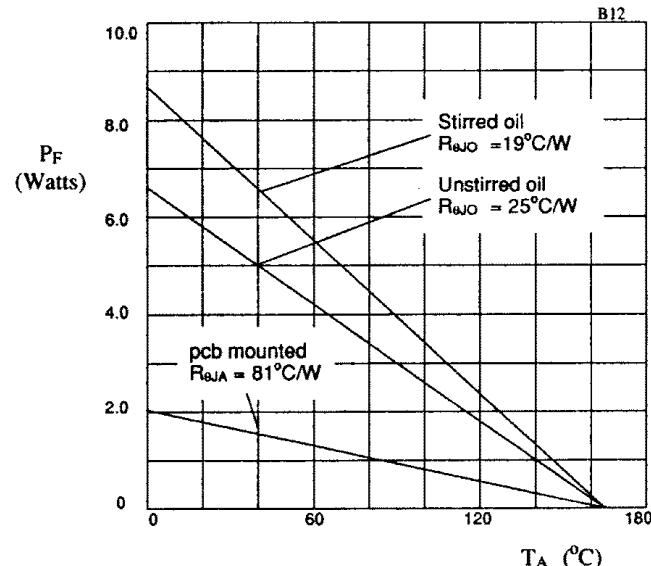


Fig 3. Power derating in air and oil.

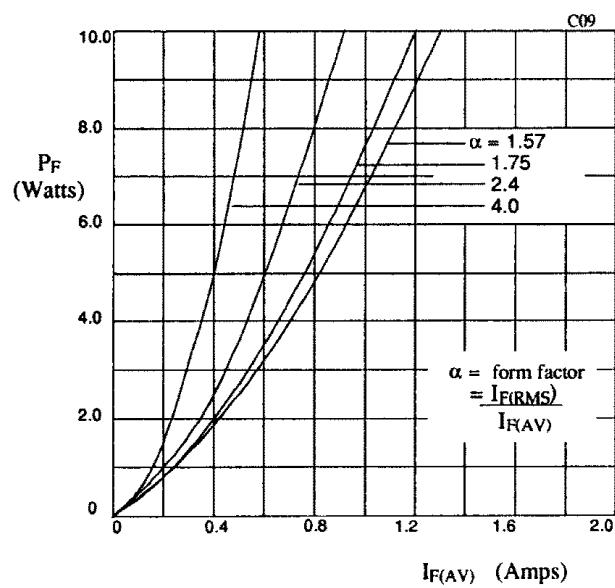


Fig 4. Forward power dissipation as a function of forward current, for sinusoidal operation.

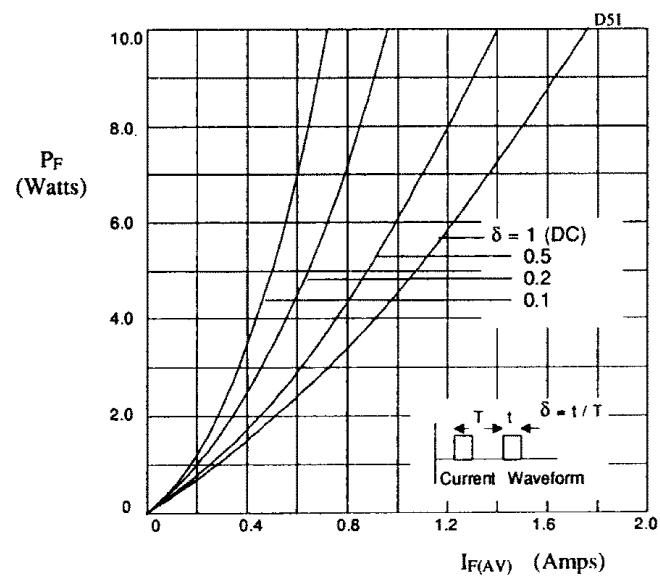


Fig 5. Forward power dissipation as a function of forward current, for square wave operation.