

## Descriptions

The S1117 series of positive adjustable and fixed regulators are designed to provide 1A with high efficiency. All internal circuitry is designed to operate down to 1.3V input to output differential. On-chip trimming adjusts reference voltage to 2%.


## Features

- Adjustable or Fixed output
- Output Current of 1A
- Low Dropout, 1.3V maximum at 1A Output Current
- Thermal Shutdown Protection
- Fast Transient Response


## Ordering Information

| Type NO.                                                                   | Marking               | Package Code |
|----------------------------------------------------------------------------|-----------------------|--------------|
| S1117API/S1117xxPI                                                         | S1117□□PI/ S1117□□□PI | TO-220F      |
| □□:Voltage Code (Aj : 1.25V, 15:1.5V,:18: 1.8V, 25:2.5V, 33:3.3V, 50:5.0V) |                       |              |
| □□□:Voltage Code (285:2.85V)                                               |                       |              |

### Outline Dimensions (Unit : mm )

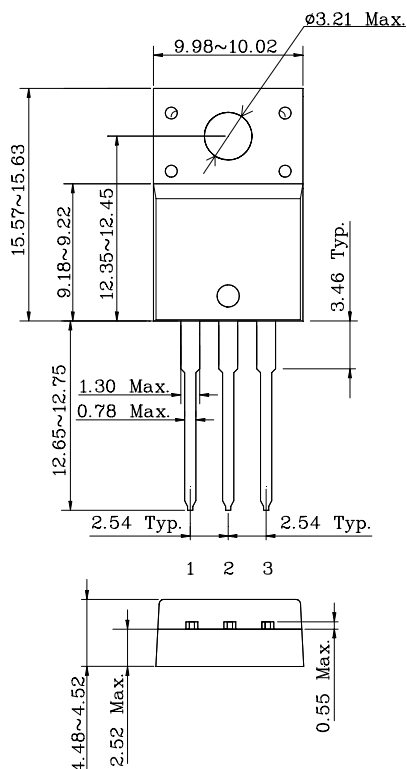

### BLOCK DIAGRAM

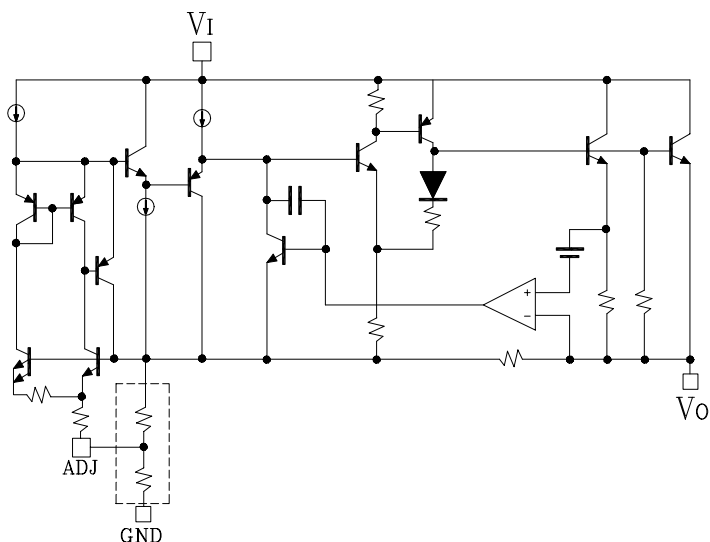

### PIN Connections

1. GND/Adj
2. Output voltage
3. Input voltage

**Absolute Maximum Ratings****T<sub>a</sub>=25°C**

| Characteristic            | Symbol           | Rating    | Unit |
|---------------------------|------------------|-----------|------|
| Input voltage             | V <sub>I</sub>   | 16        | V    |
| Power Dissipation         | P <sub>D</sub>   | 2.0       | W    |
| Junction Temperature      | T <sub>J</sub>   | 150       | °C   |
| Storage Temperature Range | T <sub>stg</sub> | -55 ~ 150 | °C   |

**Device Selection Guide** (NOTE1)

| Device      | Output Voltage |
|-------------|----------------|
| S1117API    | Adjustable     |
| S1117-15PI  | 1.5V           |
| S1117-18PI  | 1.8V           |
| S1117-25PI  | 2.5V           |
| S1117-285PI | 2.85V          |
| S1117-33PI  | 3.3V           |
| S1117-50PI  | 5.0V           |

Note 1 : Other fixed versions are available V<sub>O</sub>=1.5V to 5V

## Electrical Characteristics

(Electrical Characteristics at  $T_J = 25^\circ\text{C}$  and  $V_I = (V_O + 1.5\text{V})$ ,  $I_L = 10\text{ mA}$ ,  $C_O = 10\text{ }\mu\text{F}$  unless otherwise specified.)

| Characteristic           | Symbol                     | Device    | Test Condition                                                                                                     |   | Min   | Typ  | Max   | Unit          |
|--------------------------|----------------------------|-----------|--------------------------------------------------------------------------------------------------------------------|---|-------|------|-------|---------------|
| Output Voltage           | $V_O$                      | S1117A    | $V_I = (V_O + 1.5\text{V}), I_O = 10\text{ mA}$                                                                    |   | 1.225 | 1.25 | 1.275 | V             |
|                          |                            |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000 mA                                                          | * | 1.200 |      | 1.300 |               |
|                          |                            | S1117-15  | $V_I = (V_O + 1.5\text{V}), I_O = 10\text{ mA}$                                                                    |   | 1.470 | 1.5  | 1.530 |               |
|                          |                            |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000 mA                                                          | * | 1.440 |      | 1.560 |               |
|                          |                            | S1117-18  | $V_I = (V_O + 1.5\text{V}), I_O = 10\text{ mA}$                                                                    |   | 1.764 | 1.8  | 1.836 |               |
|                          |                            |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000 mA                                                          | * | 1.728 |      | 1.872 |               |
|                          |                            | S1117-25  | $V_I = (V_O + 1.5\text{V}), I_O = 10\text{ mA}$                                                                    |   | 2.450 | 2.5  | 2.550 |               |
|                          |                            |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000 mA                                                          | * | 2.400 |      | 2.600 |               |
|                          |                            | S1117-285 | $V_I = (V_O + 1.5\text{V}), I_O = 10\text{ mA}$                                                                    |   | 2.793 | 2.85 | 2.907 |               |
|                          |                            |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000 mA                                                          | * | 2.736 |      | 2.964 |               |
|                          |                            | S1117-33  | $V_I = (V_O + 1.5\text{V}), I_O = 10\text{ mA}$                                                                    |   | 3.234 | 3.3  | 3.366 |               |
|                          |                            |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000 mA                                                          | * | 3.168 |      | 3.432 |               |
|                          |                            | S1117-50  | $V_I = (V_O + 1.5\text{V}), I_O = 10\text{ mA}$                                                                    |   | 4.900 | 5.0  | 5.100 |               |
|                          |                            |           | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 0$ to 1000 mA                                                          | * | 4.800 |      | 5.200 |               |
| Line Regulation (Note2)  | $\Delta V_{O(\Delta V_I)}$ | All       | $1.5\text{V} \leq V_I - V_O \leq 7\text{V}$<br>$I_O = 10\text{ mA}$                                                |   | -     | 5    | 10    | mV            |
| Load Regulation (Note2)  | $\Delta V_{O(\Delta I_L)}$ | All       | $V_I = (V_O + 1.5\text{V})$<br>$I_O = 10\text{ mA} \sim 1000\text{ mA}$                                            |   | -     | 10   | 30    | mV            |
| Quiescent Current        | $I_{QC}$                   | All       | $V_I = V_O + 1.5\text{V}$<br>$V_{ADJ} = 0\text{V}$                                                                 | * | -     | 7    | 13    | mA            |
| Minimum Load Current     | $I_{L(\text{MIN})}$        | S1117A    | $V_I = (V_O + 1.5\text{V}), V_O = 0\text{V}$                                                                       | * |       | 3    | 7     | mA            |
| Adjust Pin Current       | $I_{ADJ}$                  | S1117A    | $V_I = (V_O + 1.5\text{V})$ to 7V<br>$I_O = 10\text{ mA}$                                                          | * |       | 55   | 90    | $\mu\text{A}$ |
| Dropout Voltage (Note4)  | $V_{\text{DROP}}$          | All       | $I_O = 1000\text{ mA}$                                                                                             | * | -     | 1.2  | 1.3   | V             |
| Ripple Rejection (Note3) | RR                         | All       | $V_I - V_O = 1.5\text{V}, I_O = 1000\text{ mA}$<br>$V_{\text{Ripple}} = 1\text{V}_{\text{P-P}}, f = 120\text{ Hz}$ |   | 60    | 72   | -     | dB            |
| Current Limit            | $I_{\text{LIMIT}}$         | All       | $(V_I - V_O) = 1.5\text{V}$                                                                                        | * | 1     |      |       | A             |

The \* denotes the specifications which apply over the full temperature range.

Note 2: Low duty pulse testing with Kelvin connections required.

Note 3: 120 Hz input ripple ( $C_{ADJ}$  for ADJ=25  $\mu\text{F}$ )

Note 4:  $\Delta V_O = 1\%$

## ■ Typical Applications


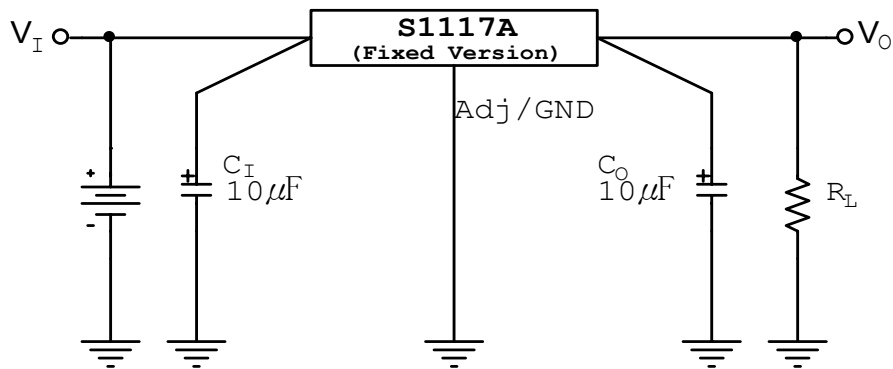


Fig. 1 Fixed Voltage Regulator

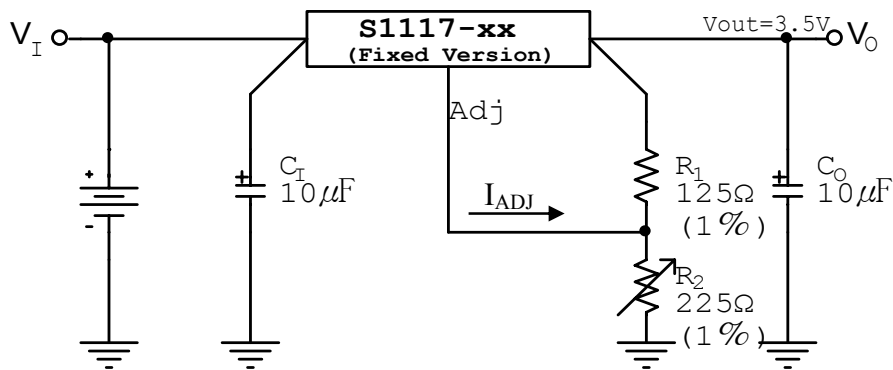

$$V_O = V_{ADJ} * (1 + R_2/R_1) + I_{ADJ} * R_2$$

Fig. 2 Adjustable Voltage Regulator

Notes:

- 1)  $C_I$  needed if device is far from filter capacitors
- 2)  $C_O$  minimum value required for stability

## Electrical Characteristic Curves

Fig. 3  $V_{\text{DROP}}$  vs.  $I_O$

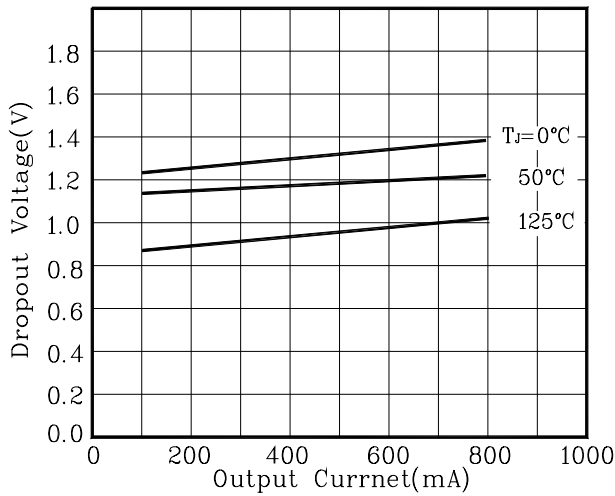


Fig. 4  $\Delta V_O$  vs.  $T_a$

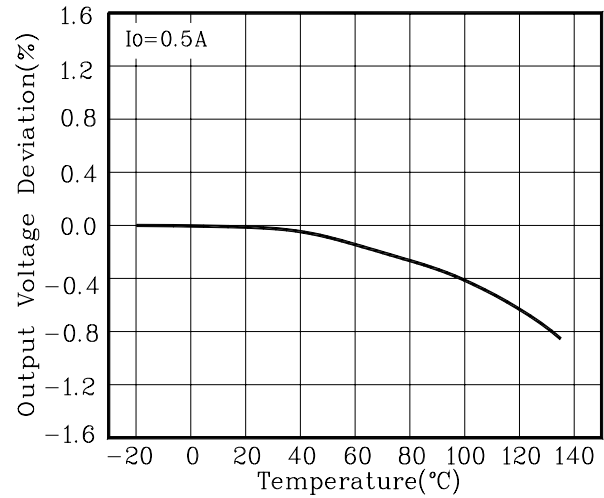


Fig. 5 RR vs. Frequency

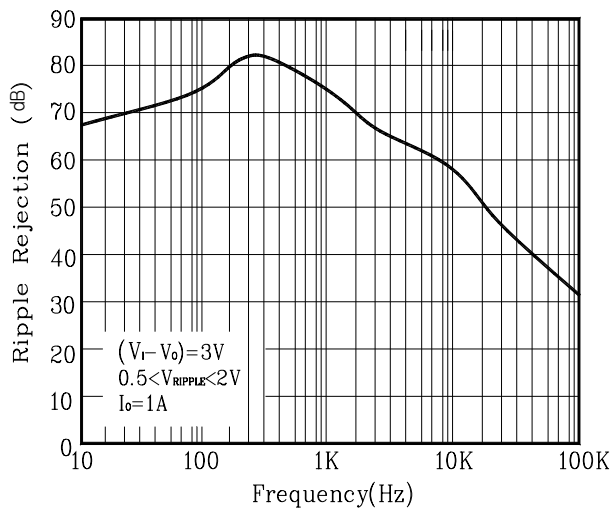


Fig. 6 Temperature Stability

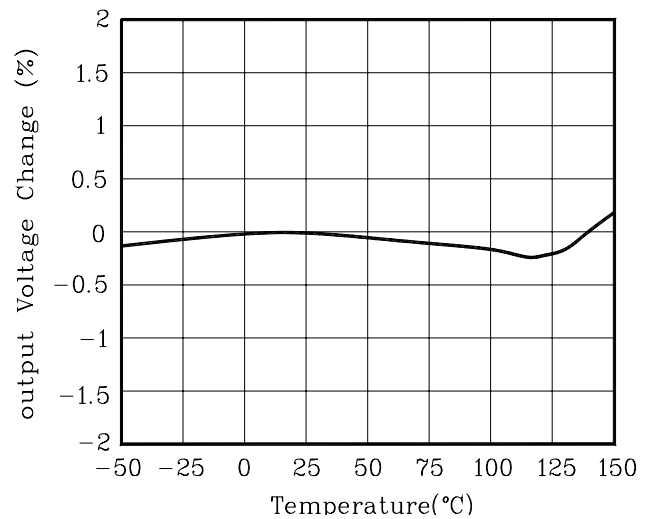


Fig. 7  $I_{\text{ADJ}}$  vs.  $T_a$


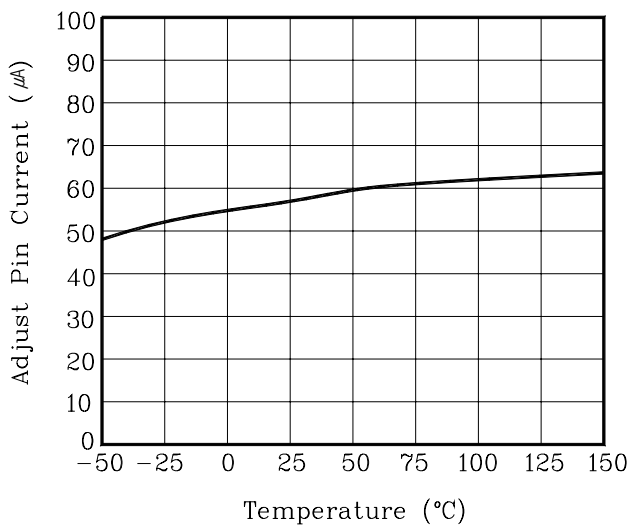


Fig. 8  $P_D$  vs.  $T_a$

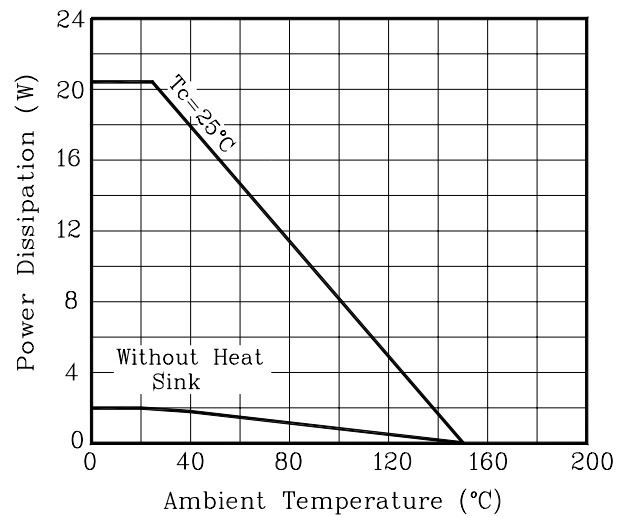

**These AUK Corp. products are intended for usage in general electronic equipment (Office and communication equipment, measuring equipment, domestic electrification, etc.) Please make sure that you consult with us before you use these AUK products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, traffic signal, combustion central, all types of safety device, etc.) AUK cannot accept liability to any damage which may occur in case these AUK products were used in the mentioned equipments without prior consultation**