


Series 11

PC mount switching solenoid valve

FEATURES

- 2-way or 3-way, 2 position valve (NO, NC & Distributor)
- Offer a discrete valve design with a 200 million life cycle rating
- Available in manifold mounting
- Provide a range of electrical coil options, including PC mountable, spade lugs, or wire leads
- Powerful enough for a range of uses that require high flow

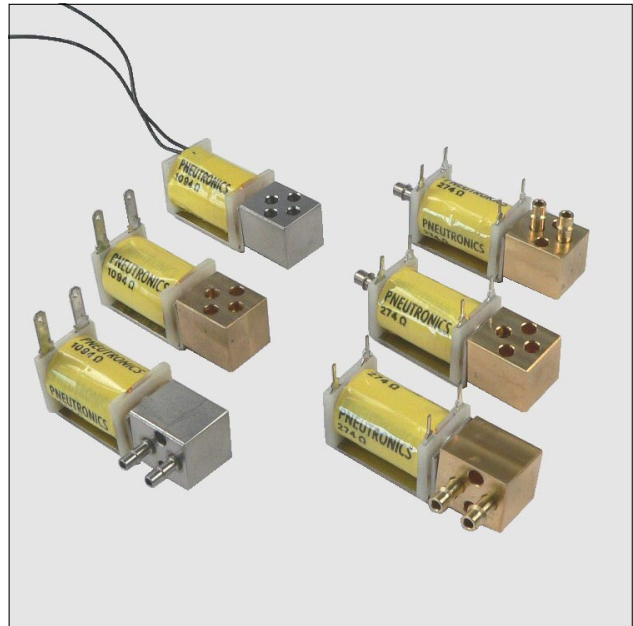

MEDIA COMPATIBILITY

Gases and selected liquids

WETTED MATERIALS

Body:
360 HO2 brass;
302 series stainless steel (passivated)

Stem base:
385 HO2 brass;
303 series stainless steel (passivated)

All others:
FKM; EPDM; 430 FR series stainless steel (passivated); 302 series stainless steel

ELECTRICAL

Power 0.5, 1.0 or 2.0 W

Voltage 5, 12, 24 V_{DC} ± 10%

PHYSICAL PROPERTIES

Operating environment	0 to 70 °C
Storage temperature	-40 to 70 °C
Length	43.9 mm (1.73 in)
Width	15.9 mm (0.625 in)
Height	17 mm (0.67 in)
Porting	10-32 tapped ports, 1/16, 5/64 or 1/8 in stem barbs
Weight	60 g (2.1 oz)
Internal volume	0.026 in ³ (without fittings)
Filtration (recommended)	40 µm
Lubrication	None required


Series 11

PC mount switching solenoid valve

PERFORMANCE CHARACTERISTICS

Part no.	Pressure	Vacuum	Orifice sizes/ Equivalent C _v ¹	Leak rate ²	Response	
1110...	0...100 psig	0...27 "Hg (0...13 psi)	0.030" (0.762 mm)/ 0.017 C _v	≤0.016 sccm (bubble tight)	<30 msec cycling (2 Watt)	
1113...	0...50 psig					
1116...	0...25 psig					
1112...	0...70 psig		0.050" (1.270 mm)/ 0.035 C _v		<30 msec cycling (2 Watt)	
1115...	0...25 psig					
1118...	0...10 psig					

FLOW CURVE (typical air flow)³

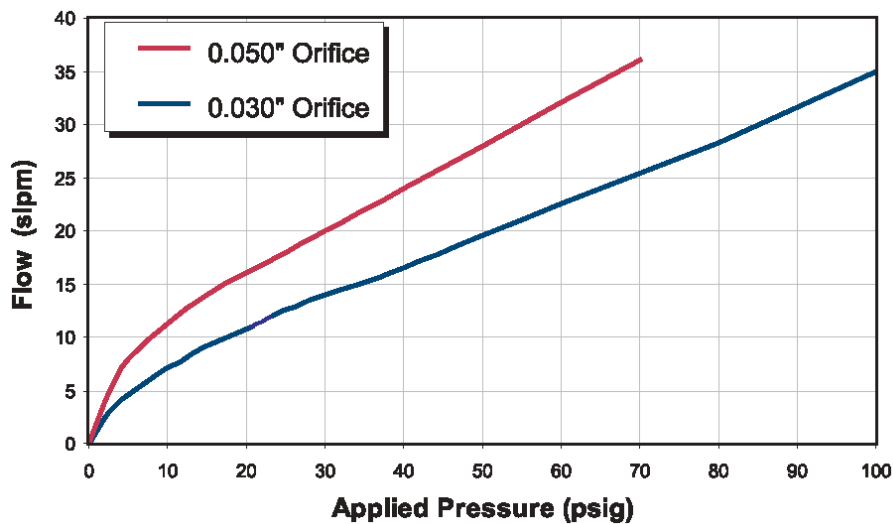

Notes:


- ¹ The C_v value is the volume flow in US gallons/min under specific flow conditions and describes the relative flow capacity of a valve. If several valves with the same nominal diameter are compared, the valve with the highest C_v value has the best flow dynamics design. The equivalent european measure is the k_v value expressed in m^3/h ($k_v = 0.86 C_v$).
- ² sccm denotes Standard Cubic Centimeters per Minute. It is a unit for the flow rate at standard conditions of temperature and pressure. 1000 sccm = 1 slpm.
- ³ slpm denotes Standard Liters per Minute. It is a unit for the flow rate at standard conditions of temperature and pressure. 1 slpm = 1000 sccm.

Series 11


PC mount switching solenoid valve

OUTLINE DRAWING


Basic dimensions

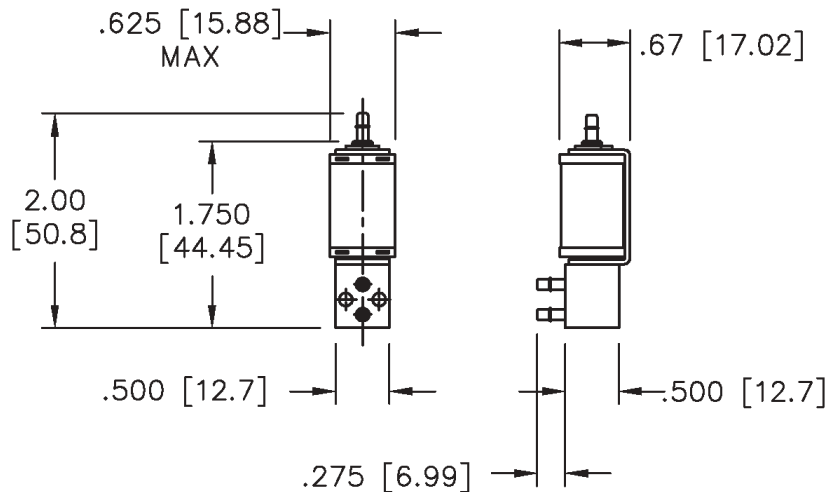

Port and mounting hole diagram

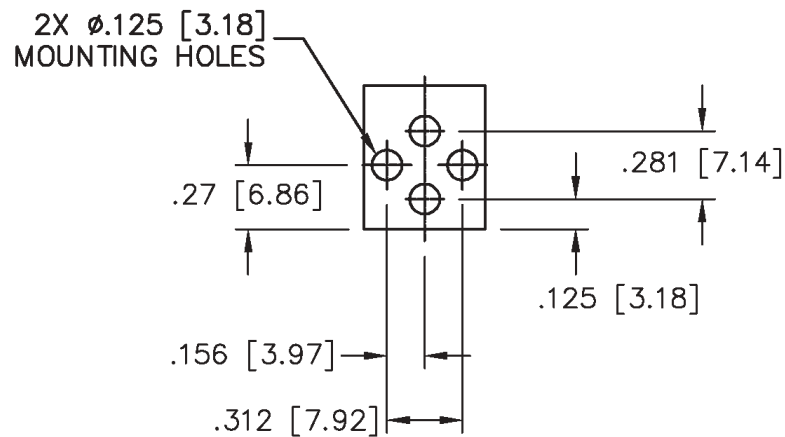

PC mounting diagram



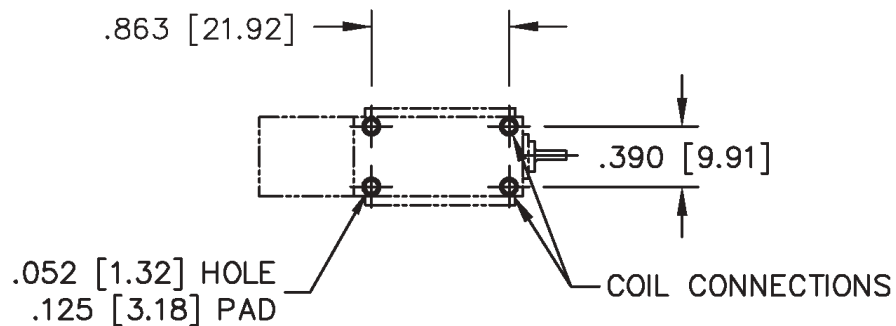


Series 11




PC mount switching solenoid valve

VALVE TYPE







Type 1






Type 2



Type 3




Type 4




Series 11

PC mount switching solenoid valve


COIL STYLES



11...F...
(Wire leads, no terminals)



11...P...
(PC mount, 4 PC pins)



11...S...
(PC mount, 2 solder pads)

BODY STYLES



11...0...
(No barbs,
face seal to manifold)



11...6...
(0.062" barbs,
1/16" I.D. tubing)



11...7...
(0.078" barbs,
5/64" I.D. tubing)



11...8...
(0.125" barbs,
1/8" I.D. tubing,
1/4" O.D. max.)

STEM STYLES



11...0
(Type 1 top seat,
plugged)



11...6
(0.062" top seat,
1/16" I.D. tubing)



11...7
(0.078" top seat,
5/64" I.D. tubing)



11...8
(0.125" top seat,
1/8" I.D. tubing,
1/4" O.D. max.)

ORDERING INFORMATION

Series		Model no.				Type		Material		Voltage		Coil type		Pneumatic connection body		Pneumatic connection stem			
		Max. pressure	Orifice size	Coil wattage	Body			Plunger & seal											
Options	11	10:	0...100 psi	0.030" (0.762 mm)	2 W	1:	2-way NC	BV:	brass	FKM	5:	5 V _{DC}	P:	4 PC pins	0:	no barbs	0:	type 1/ none	
		12:	0...70 psi	0.050" (1.27 mm)	2 W	2:	2-way NO	SV:	SS*	FKM	12:	12 V _{DC}	S:	2 solder taps	6:	1/16" barbs	6:	1/16" barbs*	
		13:	0...50 psi	0.030" (0.762 mm)	1 W	3:	3-way NC or distributor	BE:	brass	EPDM	24:	24 V _{DC}	Q:	Quick connect	7:	5/64" barbs	7:	5/64" barbs	
		15:	0...25 psi	0.050" (1.27 mm)	1 W	4:	3-way NO						F:	Wire leads, 18", no terminals	8:	1/8" barbs	8:	1/8" barbs	
		16:	0...25 psi	0.030" (0.762 mm)	0.5 W														
		18:	0...10 psi	0.050" (1.27 mm)	0.5 W														
								*Stainless steel										*1/16" barbs not available for 0.050" orifice	
Example:	11	10	3				BV		12		P		7		7				

Note: Not all combinations might be available.
Please contact your nearest Sensortech sales representative for further information.

Sensortech reserves the right to make changes to any products herein. Sensortech does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.