🗙 National Semiconductor

74LCX273 Low-Voltage Octal D Flip-Flop with 5V Tolerant Inputs and Outputs

General Description

The LCX273 has eight edge-triggered D-type flip-flops with individual D inputs and Q outputs. The common buffered Clock (CP) and Master Reset ($\overline{\text{MR}}$) input load and reset (clear) all flip-flops simultaneously.


The register is fully edge-triggered. The state of each D input, one setup time before the LOW-to-HIGH clock transition, is transferred to the corresponding flip-flop's Q output.

All outputs will be forced LOW independently of Clock or Data inputs by a LOW voltage level on the $\overline{\text{MR}}$ input. The device is useful for applications where the true output only is required and the Clock and Master Reset are common to all storage elements.

The device is designed for low voltage (3.3V) V_{CC} applications with capability of interfacing to a 5V signal environment. The LCX273 is fabricated with an advanced CMOS technology to achieve high speed operation while maintaining CMOS low power dissipation.

Features

- 5V tolerant inputs and outputs
- 10 µA I_{CCQ} max
- Power-down high impedance inputs and outputs
- Supports live insertion/withdrawal
- 2.0V-3.6V V_{CC} supply operation
- ±24 mA output drive
- Implements patented Quiet Series™ noise/EMI reduction circuitry
- Functionally compatible with the 74 series 273
- Latch-up performance exceeds 500 mAESD performance:
 - Human Body Model > 2000V Machine Model > 200V

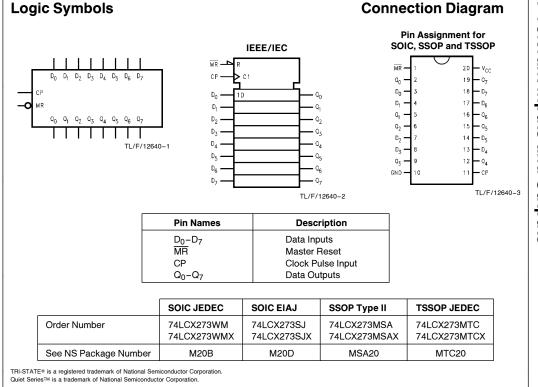

© 1996 National Semiconductor Corporation TL/F/12640

RRD-B30M17/Printed in U. S. A.

http://www.national.com

'4LCX273 Low-Voltage Octal D Flip-Flop with 5V Tolerant Inputs and Outputs

ADVANCE INFORMATION

November 1996

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

 Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.

 A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

National Semiconductor	National Semiconductor	National Semiconductor	National Semiconductor
Corporation	Europe	Southeast Asia	Japan Ltd.
Americas Tel: 1(800) 272-9959 Fax: 1(800) 737-7018 Email: support@nsc.com http://www.national.com	Fax: +49 (0) 180-530 85 86 Email: europe.support@nsc.com Deutsch Tei: +49 (0) 180-530 85 85 English Tei: +49 (0) 180-532 78 32 Français Tei: +49 (0) 180-532 93 58 Italiano Tei: +49 (0) 180-534 16 80	Fax: (852) 2376 3901 Email: sea.support@nsc.com	Tel: 81-3-5620-7561 Fax: 81-3-5620-6179

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.