

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0366330021

Status:

Active

Overview:

minifit_jr

Description:

4.20mm (.165") Mini-Fit Jr.™ Header, Right Angle, Nylon, without Mounting Flange, 10 Circuits, Tin (Sn) over Nickel (Ni) Plating, Lead free

Documents:

Drawing (PDF)

Product Specification PS-87427-0001 (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family

Series

Application

Comments

PCB Headers

87427

Wire-to-Board

Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 Mini-Fit Plus HCS™ Crimp Terminal Crimped to 16 AWG wire. . See Molex product specification PS-45750-001 for additional current de-rating information.

Overview

Product Name

minifit_jr

Mini-Fit Jr.™

Physical

Breakaway

Circuits (Loaded)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Glow-Wire Compliant

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Number of Rows

Orientation

PC Tail Length (in)

PC Tail Length (mm)

PCB Locator

PCB Retention

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Plating min: Mating (µin)

Plating min: Mating (µm)

Plating min: Termination (µin)

Plating min: Termination (µm)

Polarized to Mating Part

Polarized to PCB

Shrouded

Stackable

Temperature Range - Operating

No

10

Beige

30

No

No

Yes

Brass

Tin

Tin

Nylon

2

Right Angle

0.130 In

3.30 mm

No

None

0.062 In

1.60 mm

Tray

0.165 In

4.20 mm

0.165 In

4.20 mm

100

2.54

100

2.54

Yes

No

Fully

No

-40°C to +105°C

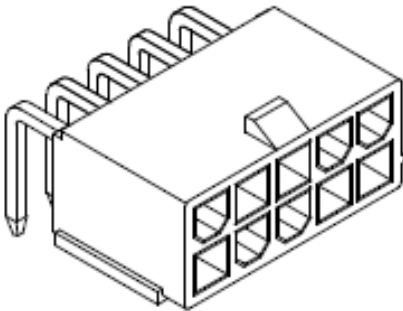


image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

87427Series

Mates With

5557 Mini-Fit Jr.™ Receptacle Housing

Termination Interface: Style

Through Hole

Electrical

Current - Maximum per Contact

13A

Voltage - Maximum

600V

Material Info

Reference - Drawing Numbers

Packaging Specification

PK-87427-001

Product Specification

PS-87427-0001

Sales Drawing

SD-87427-**0*

This document was generated on 05/24/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

10

9

8

7

6



5

4


3

2


1

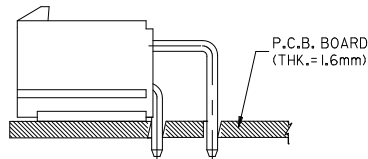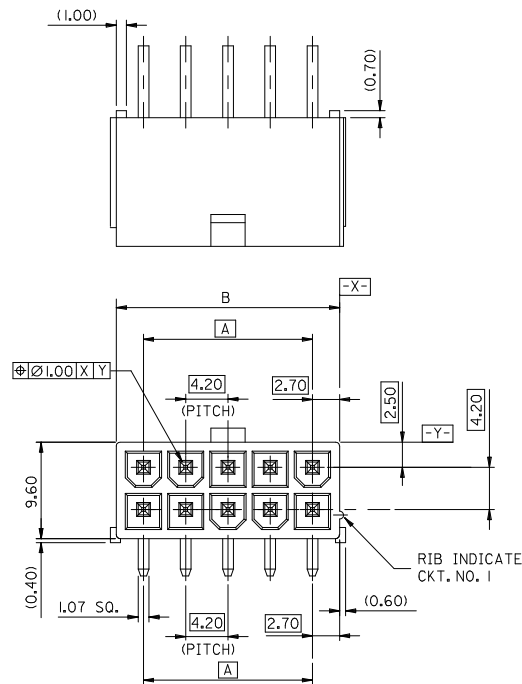

RECOMMENDED INSTALLATION PATTERN

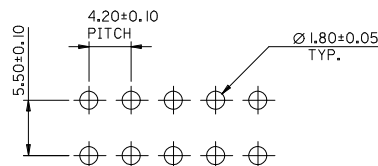

RECOMMENDED P.C.B. LAYOUT



ISOMETRIC VIEW

LEGEND

87427-****

CKT. SIZE
(SEE SHEET 2).

PLATING OPTIONS

2 = NOTE 2

3 = NOTE 3

PACKAGING OPTIONS

0 = TRAY PACKED

2 = TUBE PACKED

NOTES

1. MATERIAL - HEADER : NYLON 46, UL94V-0, COLOR BEIGE
PIN : BRASS (1.07 SQUARE)

2. PLATING OF PIN
TIN 2.54um MIN. OVER NICKEL 1.27um MIN.

3. PLATING OF PIN
TIN 4-10um OVER COPPER 2-8um.

4. PLATING OF PIN
TIN 2.54um MIN. OVER NICKEL 1.27um MIN. WITH MATT FINISH.

5. PART NUMBERS 36633-0020 TO 36633-0024 & 36633-0040 TO 36633-0046 INCLUDED AS SHOWN IN TABLE 'X'.

CORRECT TOLERANCE		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
EC NO: UCP2010-0395 DRAWN: JAGUILAR CHKD: EDMUD APPR: FSMITH		DESCRIPTION ▽=0 ▽C=0		mm		INCH		DRAWN BY STEVEN		DATE 1995/02/27			
				4 PLACES ±---		±---		CHECKED BY EDMUD		DATE 1995/03/01			
				3 PLACES ±---		±---		APPROVED BY FSMITH		DATE 2010/04/09			
				2 PLACES ±0.20		±---		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-87427-**0*		SHEET NO. 1 OF 2	
				1 PLACE ±0.20		±---							
				ANGULAR ±---°									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

9

8

7

6


5

4

3

2

1

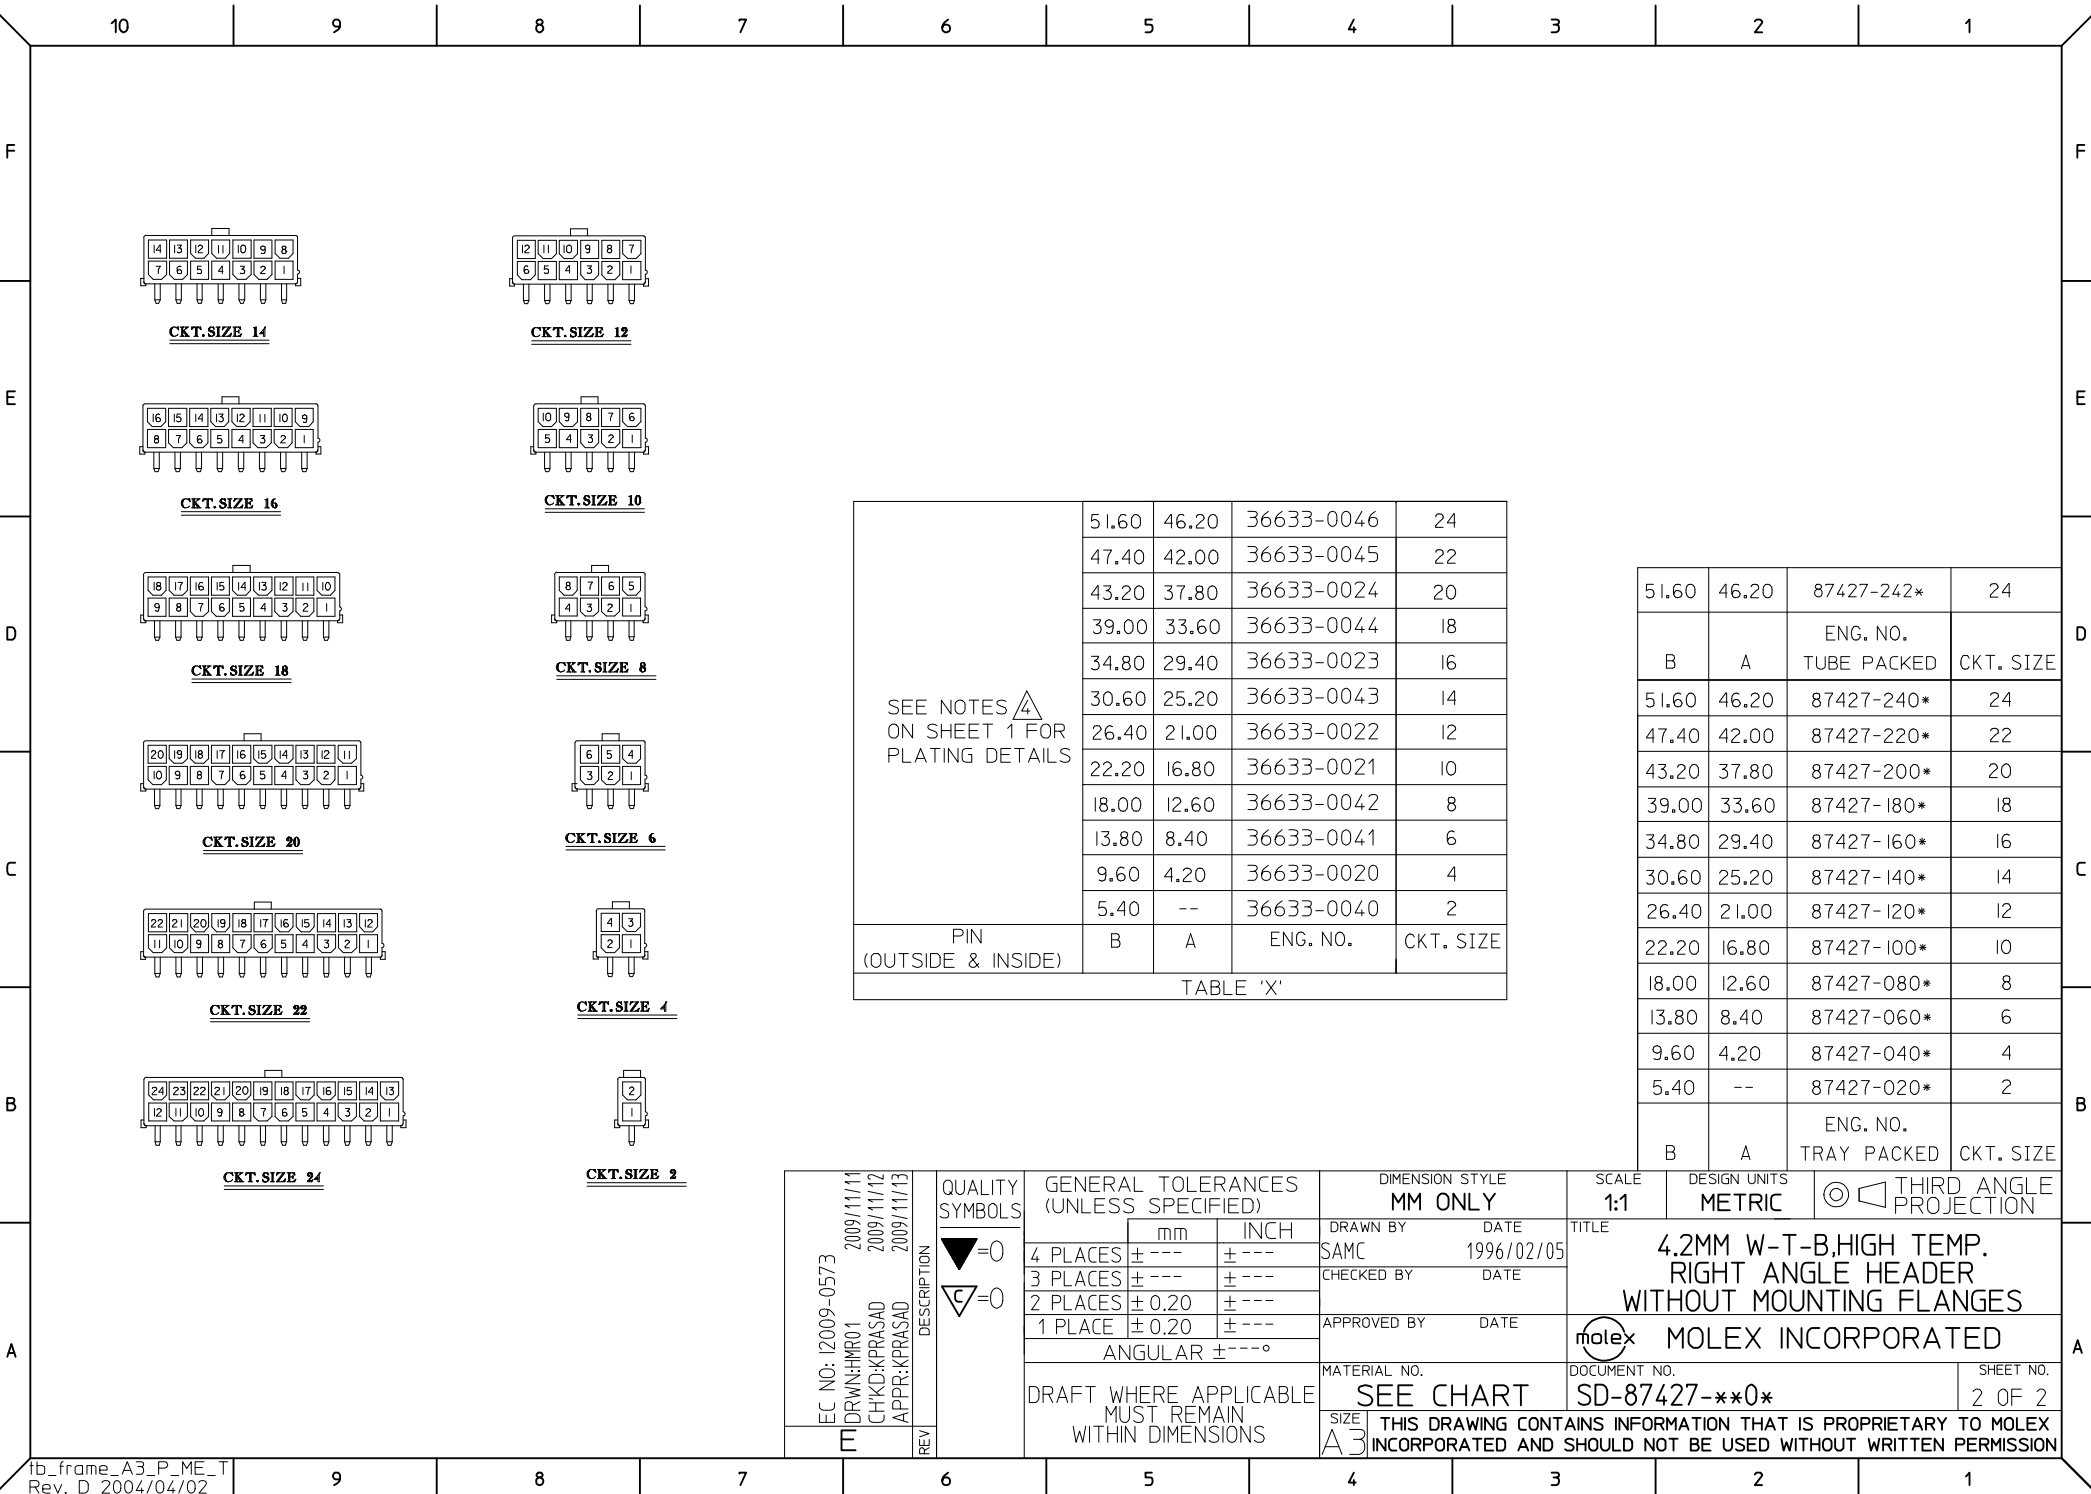

CKT.SIZE 14

CKT.SIZE 12

CKT.SIZE 16

CKT.SIZE 10

CKT.SIZE 18

CKT.SIZE 8

CKT.SIZE 20

CKT.SIZE 6

CKT.SIZE 22

CKT.SIZE 4

CKT.SIZE 24

CKT.SIZE 2

SEE NOTES  ON SHEET 1 FOR PLATING DETAILS	51.60	46.20	36633-0046	24
	47.40	42.00	36633-0045	22
	43.20	37.80	36633-0024	20
	39.00	33.60	36633-0044	18
	34.80	29.40	36633-0023	16
	30.60	25.20	36633-0043	14
	26.40	21.00	36633-0022	12
	22.20	16.80	36633-0021	10
	18.00	12.60	36633-0042	8
	13.80	8.40	36633-0041	6
	9.60	4.20	36633-0020	4
	5.40	--	36633-0040	2
PIN (OUTSIDE & INSIDE)	B	A	ENG. NO.	CKT. SIZE

TABLE 'X'

51.60	46.20	87427-242*	24
B	A	ENG. NO. TRAY PACKED	CKT. SIZE
51.60	46.20	87427-240*	24
47.40	42.00	87427-220*	22
43.20	37.80	87427-200*	20
39.00	33.60	87427-180*	18
34.80	29.40	87427-160*	16
30.60	25.20	87427-140*	14
26.40	21.00	87427-120*	12
22.20	16.80	87427-100*	10
18.00	12.60	87427-080*	8
13.80	8.40	87427-060*	6
9.60	4.20	87427-040*	4
5.40	--	87427-020*	2
B	A	ENG. NO. TRAY PACKED	CKT. SIZE

EC NO: I2009-0573 DRWN:HME01 CHKD:KPRASAD APPR:KPRASAD REV	DESCRIPTION	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY SAMC	DATE 1996/02/05	TITLE 4.2MM W-T-B,HIGH TEMP. RIGHT ANGLE HEADER WITHOUT MOUNTING FLANGES	MOLEX MOLEX INCORPORATED	SHEET NO. 2 OF 2
			4 PLACES	± ---	± ---	CHECKED BY	DATE			
			3 PLACES	± ---	± ---	APPROVED BY	DATE			
			2 PLACES	± 0.20	± ---					
			1 PLACE	± 0.20	± ---					
			ANGULAR ±---°							
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE CHART		DOCUMENT NO. SD-87427-**0*		
						SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		