

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0015921030](#)
Status: **Active**
Description: 1.27mm (.050") Pitch EBBI™ 50D Receptacle, Vertical, 30 Circuits

Documents:

[3D Model](#) [Product Specification PS-71660 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family PCB Receptacles
Series [71660](#)
Application Board-to-Board
Application Tooling Part Link 622004600
Application Tooling Part Link 622005500
Product Name EBBI™

Physical

Circuits (Loaded) 30
Color - Resin Black
Durability (mating cycles max) 2,000
Flammability 94V-0
Glow-Wire Compliant No
Guide to Mating Part Yes
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Number of Rows 2
Orientation Vertical
PC Tail Length (in) 0.134 In
PC Tail Length (mm) 3.40 mm
PCB Locator Yes
PCB Retention Yes
PCB Thickness Recommended (in) 0.062 In
PCB Thickness Recommended (mm) 1.60 mm
Packaging Type Tray
Pitch - Mating Interface (in) 0.050 In
Pitch - Mating Interface (mm) 1.27 mm
Plating min: Mating (µin) 30
Plating min: Mating (µm) 0.75
Plating min: Termination (µin) 10
Plating min: Termination (µm) 0.25
Polarized to PCB Yes
Temperature Range - Operating -40°C to +105°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 1A
Voltage - Maximum 30V

Solder Process Data

Duration at Max. Process Temperature (seconds) 30
Lead-free Process Capability SMC & Wave Capable (TH only)

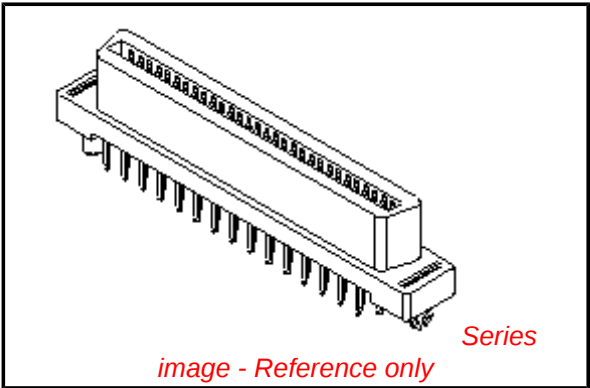


image - Reference only

EU RoHS

ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[71660Series](#)

Mates With

[71661](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
IDT - Manual Press	0622004600
IDT - Manual Press	0622005500

Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260
Material Info	
Old Part Number	A716601030
Reference - Drawing Numbers	
Product Specification	PS-71660
Sales Drawing	SDA-71660-1***, SDA-71660-1****

This document was generated on 04/20/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

13

12

11

10

9

8

7

6

5

4

3

2

1

J

I

H

G

F

E

D

C

B

A

J

I

H

G

F

E

D

C

B

A

NOTES:

1) MATERIALS:

HOUSING- LCP, GLASS FILLED, 94V-0, BLACK.

TERMINALS- COPPER ALLOY

METAL PEGS- COPPER ALLOY

2) FINISH:

TERMINALS:

.000030/(0.00076) MINIMUM GOLD IN CONTACT AREA OVER

.000050/(0.00127) MINIMUM TIN IN TAIL AREA OVER

.000075/(0.00191) MINIMUM NICKEL UNDERPLATE OVERALL.


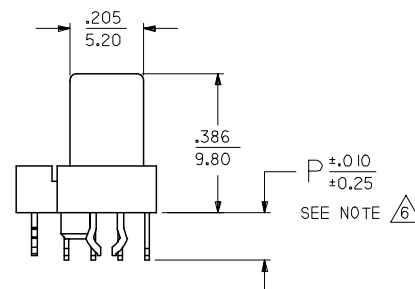
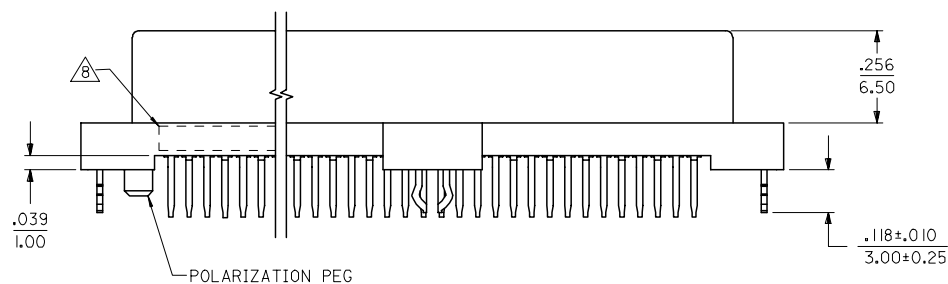
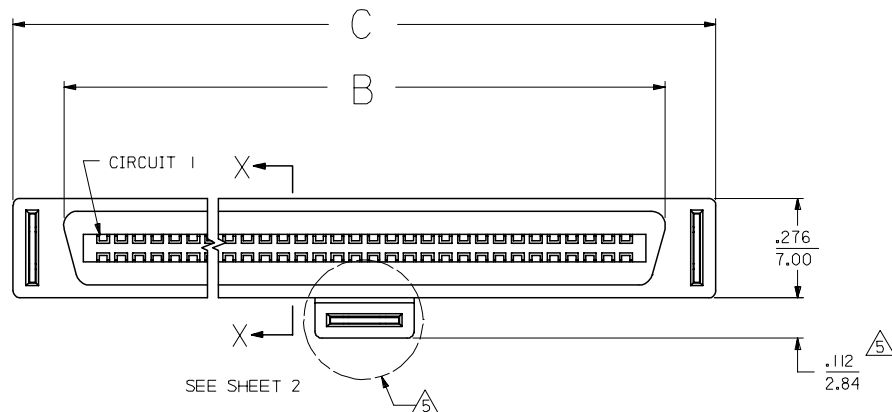
3) ASSEMBLY MATES WITH MOLEX P/N SDA-71661-****.

4) CONFORMS TO PRODUCT SPECIFICATION PS-71660.

△5 CENTER PEG IS ONLY ON 120 AND 130 CIRCUIT ASSEMBLIES.

△6 TAIL LENGTH ON FIRST MATE CONTACTS IS APPROXIMATELY
.010 INCH/0.25 MM SHORTER THAN THE TAIL LENGTH SPECIFIED.△7 CONNECTOR WILL ACCEPT MATING TO A P.C. BOARD WITH
A THICKNESS OF .062±.003.△8 FOUR DIGIT DATE CODE (WK YR), EXAMPLE => 26 96
LOCATED IN AREA INDICATED.

△9 SEE CHART FOR PACKAGING INFORMATION.

60 CIRCUIT ASSEMBLY SHOWN
SCALE 2:1

3	0
2	0
1	0
SHT	REV

UPDATE BORDER EC NO: UCP2007-0935 DRAWN BY: 2006/11/06 CHKD: MIBARRA 2006/11/06 APPR: SMILLER 2006/11/07 REV: _____	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY	DATE	TITLE SALES ASSEMBLY MOLEX EBBI 50D VERTICAL RECEPTACLE CONNECTOR		
			4 PLACES	± ---	± ---	RAN	6/15/92			
			3 PLACES	± ---	± .005	CHECKED BY	DATE	MOLEX INCORPORATED		
			2 PLACES	± 0.13	± .010	RAN	6/15/92			
			1 PLACE	± 0.25	± ---	APPROVED BY	DATE	molex MOLEX INCORPORATED		
			ANGULAR		± 1/2°	CAB	6/15/92			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.			SHEET NO.
					SEE TABLE		SDA-71660-1***			1 OF 3
					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

12

11

10

9

8

7

6

5

4

3

2

1

