

ISOLATED DC/DC CONVERTERS

48 Vdc Input

12 Vdc/18 A Output

bel
POWER PRODUCTS

0RX3-D2T12x

RoHS Compliant

Rev.C

- Isolated
- High Efficiency
- High Power Density
- Low Cost
- Fixed Frequency (300 kHz)
- Input Under-voltage Lockout
- Input Over-voltage Lockout
- Output Over-voltage Protection
- OCP/SCP
- Over Temperature Protection
- Remote On/Off
- Basic Insulation
- Baseplate



Description

The 0RX3-D2T12x is an isolated dc/dc converter that operates from a nominal 48 Vdc source. This unit will provide up to 216 W of output power from a nominal 48 Vdc input. This unit is designed to be highly efficient and low cost. Features include remote on/off, over current protection and over-voltage protection. The converter is provided in an industry standard quarter brick package.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active High	Model Number Active Low
12 V	36 V - 75 V	18 A	216 W	95%	0RX3-D2T120	0RX3-D2T12L

Notes: 1. Add "G" suffix at the end of the model number to indicate Tray Packaging.

2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	80 V	
Input voltage Transient Protection	-	-	100 V	Operating for 100ms
Remote On/Off	-0.3 V	-	18 V	
I/O Isolation Voltage	-	-	1500 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-55 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	36 V	48 V	75 V	
Input Current (full load)	-	-	7.0 A	
Input Current (no load)	-	80 mA	150 mA	
Remote Off Input Current	-	10 mA	20 mA	
Input Reflected Ripple Current (pk-pk)	-	20 mA	30 mA	Tested with simulated source impedance of 10 uH, 5 Hz to 20 MHz; use a 100 uF /100 V electrolytic capacitor with ESR = 1 ohm max. at 200 kHz at 25 °C.
Input Reflected Ripple Current (rms)	-	5 mA	10 mA	
I ² t Inrush Current Transient	-	-	1 A ² s	
Turn-on Voltage Threshold	-	34.5 V	35.5 V	
Turn-off Voltage Threshold	32.5 V	33.5 V	-	

Notes: 1. Should place at least 100uF/100V electrolytic capacitor directly adjacent to the input pin of the module.

2. All specifications are typical at nominal input, full load at 25 °C unless noted.

ISOLATED DC/DC CONVERTERS

48 Vdc Input

12 Vdc/18 A Output



Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point	-	12 V	-	Vin=48 V, Io=50% full load
Line Regulation	-	±50 mV	±100 mV	
Load Regulation	-	±300 mV	±500 mV	
Regulation Over Temperature (-40 °C to +85 °C)	-	±150 mV	±250 mV	
Output Current	0 A	-	18 A	
Current Limit Threshold	-	20 A	-	
Short Circuit Surge Transient	-	-	5 A ² s	
Ripple and Noise (rms)	-	25 mV	50 mV	0-20 MHz BW, with a 1 uF ceramic capacitor and a 10 uF Tantalum capacitor at the output.
Ripple and Noise (pk-pk)	-	70 mV	120 mV	
Turn on Time	-	30 mS	-	Ton(Enable form Vin)
	-	10 mS	-	Ton(Enable form ON/OFF)
Overshoot at Turn on	-	0%	3%	
Output Capacitance	0 uF	-	10000 uF	
Transient Response				
50% ~ 75% Max Load	Overshoot	-	300 mV	Test conditions: di/dt = 0.1 A/uS, Vin=48 V, with a 1 uF ceramic capacitor and a 10 uF Tantalum capacitor at the output.
	Settling Time	-	500 uS	
75% ~ 50% Max Load	Overshoot	-	300 mV	
	Settling Time	-	500 uS	

Note: All specifications are typical at nominal input, full load at 25 °C unless noted.

General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency	-	95%	-	Vin=48 V, full load, Ta=25 °C
Switching Frequency	-	300 kHz	-	
Isolation capacitance	-	2200 pF	-	
Input to Output Isolation Voltage	-	-	1500 V	
Isolation Resistance	10M ohm	-	-	
Over Temperature Protection	-	125 °C	130 °C	
Over Voltage Protection	-	14.5 V	-	
Temperature Limits for Power Derating Curves				
Semiconductor Junction Temperature	-	-	120 °C	Package rated to 150°C
Board Temperature	-	-	125 °C	UL rated max operating temp 130°C
Transformer Temperature	-	-	125 °C	
MTBF	1,791,138 hours			Calculated Per Bell Core SR-332 (Vin=48 V, Vo=12 V, Io = 14.4 A, 300LFM forced air flow; Ta = 25 °C)
Dimensions	2.28 x 1.45 x 0.50 57.91 x 36.83 x 12.70			
	Inches			
	millimeters			
Weight	-	70 g	-	

Note: All specifications are typical at nominal input, full load at 25 °C unless noted.

ISOLATED DC/DC CONVERTERS

48 Vdc Input


12 Vdc/18 A Output

bel
POWER PRODUCTS



Control Specifications

Parameter		Min	Typ	Max	Notes
Remote On/Off					
Signal Low (Unit On)	Active Low	-0.3 V	-	0.8 V	When Remote On/Off pin is open, for active low option, unit is off; for active high option, unit is on.
Signal High (Unit Off)		2.4 V	-	18 V	
Signal Low (Unit Off)	Active High	-0.3 V	-	0.8 V	
Signal High (Unit On)		2.4 V	-	18 V	
Current Sink		0 mA	-	0.75 mA	

Efficiency Data

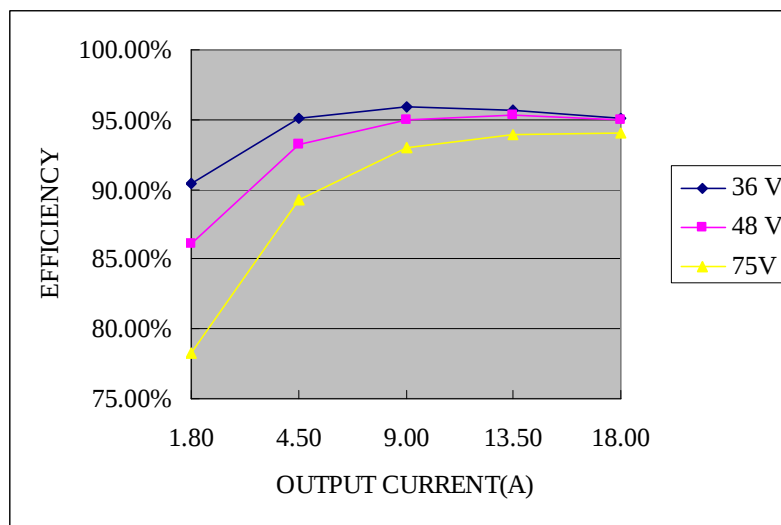

Thermal Derating Curve

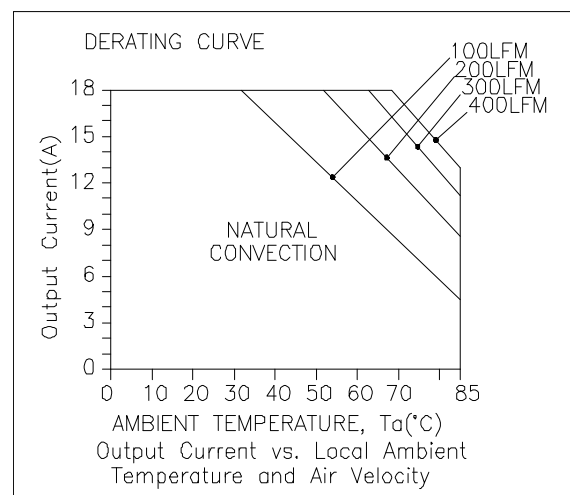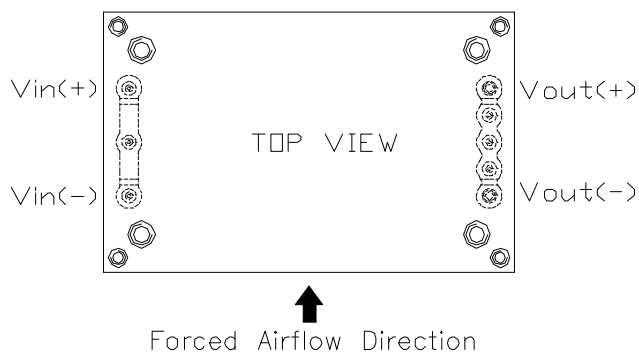

Output current derating versus ambient temperature and airflow @Vin=48V


ISOLATED DC/DC CONVERTERS

48 Vdc Input

12 Vdc/18 A Output

bel
POWER PRODUCTS


Ripple and Noise Waveform

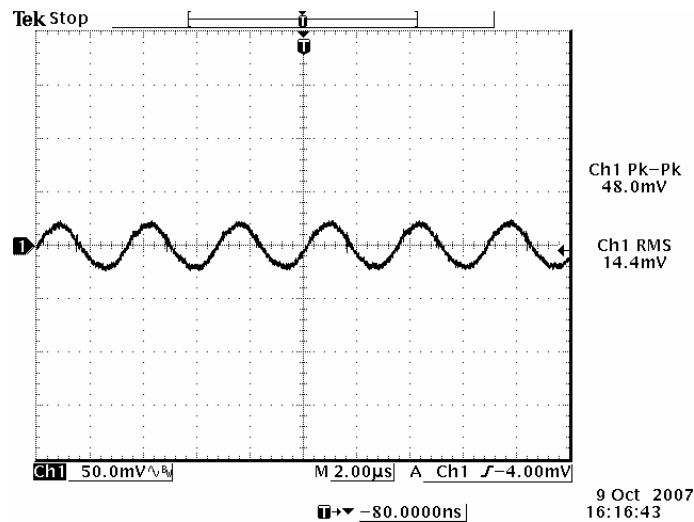


48 Vdc input, 12 Vdc/18 A output

Note: Ripple and noise at full load, with a 1 μ F ceramic cap and a 10 μ F Tantalum cap at output, Ta=25°C.

Transient Response Waveforms

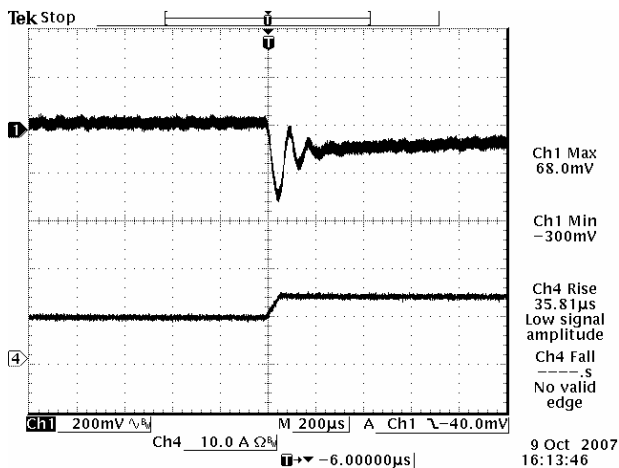

Vout=12 Vdc, 50% to 75% Load Transients

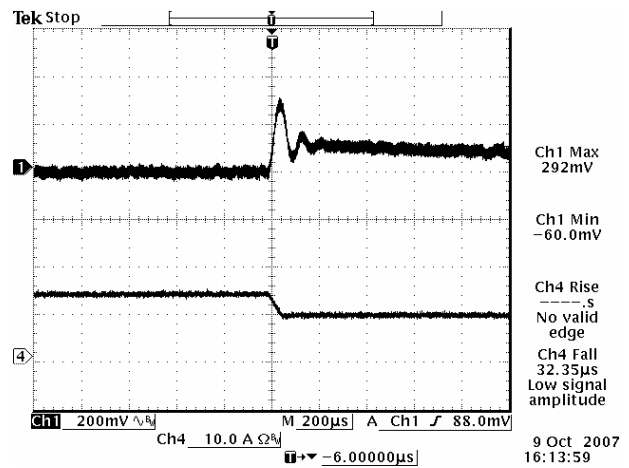

Vout=12 Vdc, 75% to 50% Load Transients

Note: Transient response at di/dt=0.1 A/ μ s, Vin=48 Vdc, Ta=25°C, with a 1 μ F ceramic capacitor and a 10 μ F tantalum cap at output.


ISOLATED DC/DC CONVERTERS

48 Vdc Input


12 Vdc/18 A Output

bel
POWER PRODUCTS

Start-Up Time

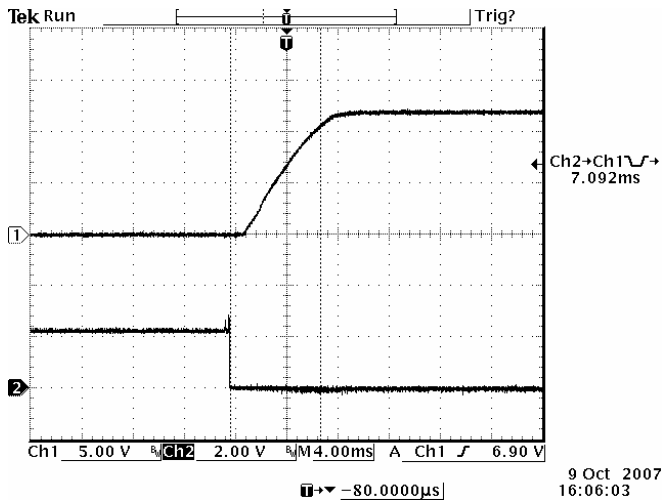


Start up time with remote on/off

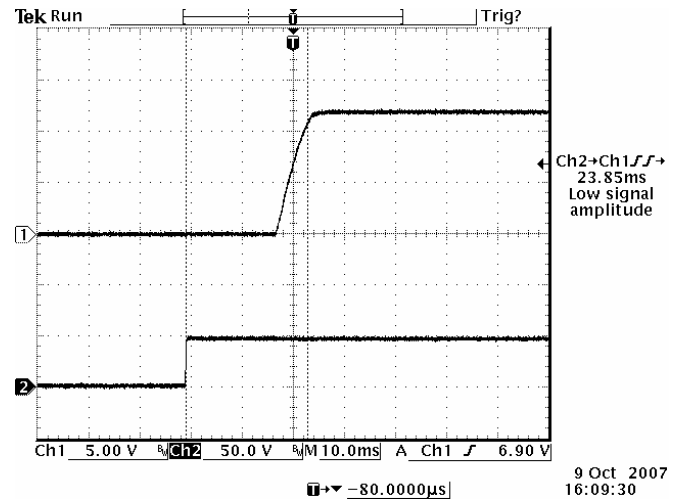

Start up time with Vin

Note: Test at 48Vdc input, 12Vdc/18A output, Ta=25 deg C, and with a 1uF ceramic cap and a 10000 uF AL cap at output.

Over Current Protection

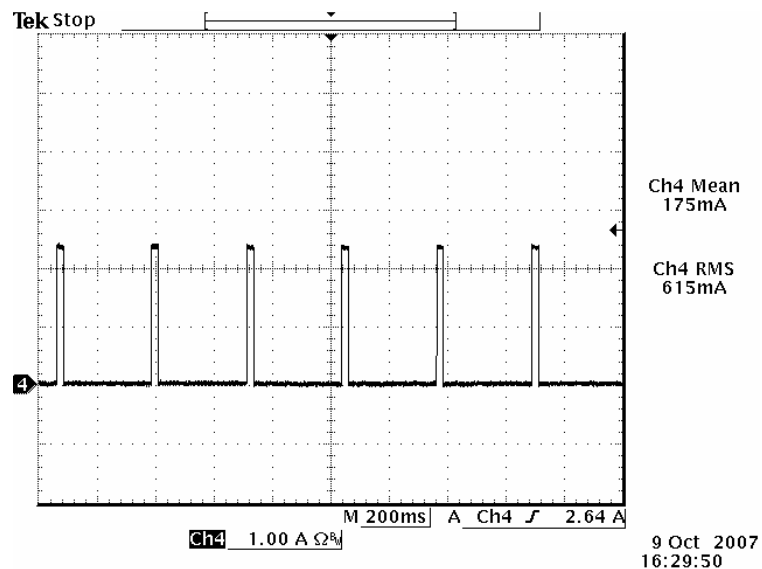

In hiccup mode @48Vdc input Ta=25 deg C


ISOLATED DC/DC CONVERTERS

48 Vdc Input

12 Vdc/18 A Output

bel
POWER PRODUCTS

Mechanical Outline

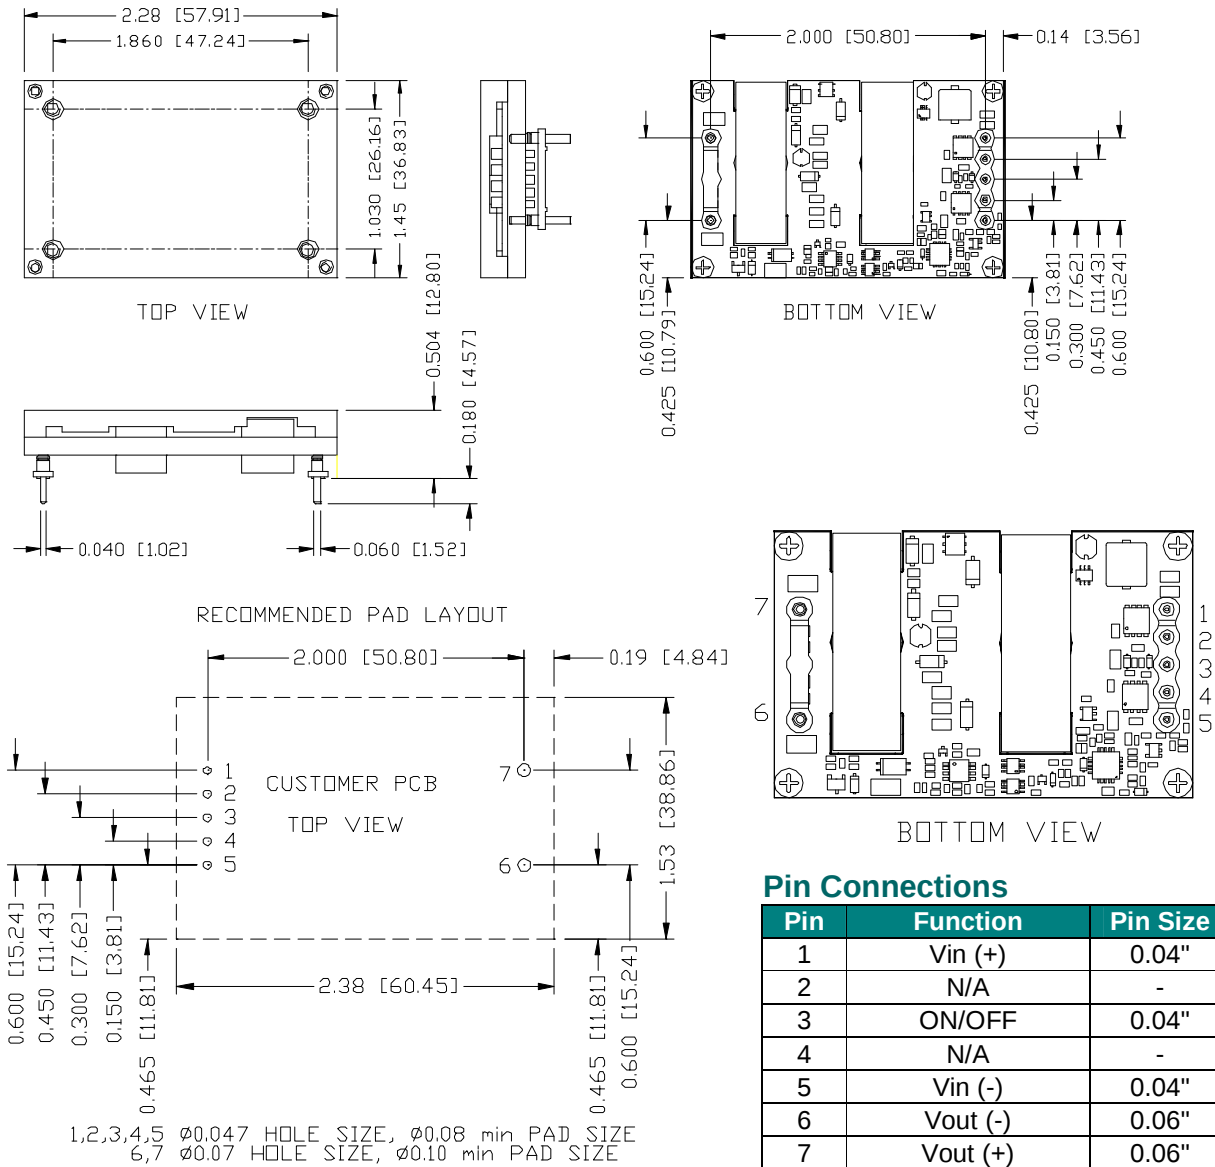

Pin Connections

Pin	Function	Pin Size
1	Vin (+)	0.04"
2	N/A	-
3	ON/OFF	0.04"
4	N/A	-
5	Vin (-)	0.04"
6	Vout (-)	0.06"
7	Vout (+)	0.06"

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2009 Bel Fuse Inc. Specifications subject to change without notice. 052709

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com