

Surface Mount Multilayer Ceramic Chip Capacitors

DSCC Qualified Type 05006



FEATURES

- Excellent aging characteristics
- Stable BP, BR and BX dielectrics
- Federal stock control number, CAGE CODE 95275
- Surface-mount, precious metal technology, wet build process
- Made with a combination of design, materials and tight process control to achieve very high field reliability
- US defense supply center approved
- Case size 0805
- Tin/lead ("Z" and "U" termination codes) available



Available
RoHS*
COMPLIANT

ELECTRICAL SPECIFICATIONS

Note: Electrical characteristics at + 25 °C unless otherwise specified

Operating Temperature: BP, BR, BX: - 55 °C to + 125 °C

Capacitance Range:

BP: = 0.5 pF to 3300 pF

BR: = 150 pF to 0.1 μF

BX: = 150 pF to 0.1 μF

Voltage Rating: 10 Vdc to 200 Vdc

Temperature Coefficient of Capacitance (TCC):

BP: = 0 ± 30 ppm/°C from - 55 °C to + 125 °C
with zero (0) Vdc applied

BP: = 0 ± 30 ppm/°C from - 55 °C to + 125 °C
with 100 % rated Vdc applied

BR: = ± 15 % from - 55 °C to + 125 °C
with zero (0) Vdc applied

BR: = + 15 %, - 40 % from - 55 °C to + 125 °C
with 100 % rated Vdc applied

BX: = ± 15 % from - 55 °C to + 125 °C
with zero (0) Vdc applied

BX: = + 15 %, - 25 % from - 55 °C to + 125 °C
with 100 % rated Vdc applied

Dissipation Factor (DF):

BP:

0.15 % max. at 1.0 V_{rms} and 1 MHz for values ≤ 1000 pF

BR and BX:

≤ 25 V ± 3.5 % max. at 1.0 V_{rms} and 1 kHz

≥ 50 V ± 2.5 % max. at 1.0 V_{rms} and 1 kHz

Aging Rate:

BP: = 0 % maximum per decade

BR, BX: = 1 % maximum per decade

Insulation Resistance (IR):

At + 25 °C and rated voltage 100 000 MΩ minimum or 1000 ΩF, whichever is less

At + 125 °C and rated voltage 10 000 MΩ minimum or 100 ΩF, whichever is less

Dielectric Withstanding Voltage (DWV):

This is the maximum voltage the capacitors are tested for a 1 to 5 second period and the charge/discharge current does not exceed 50 mA


≤ 200 V(DC); DWV at 250 % of rated voltage

* Pb containing terminations are not RoHS compliant, exemptions may apply

Surface Mount Multilayer Ceramic Chip Capacitors
DSCC Qualified Type 05006

Vishay Vitramon

DIMENSIONS

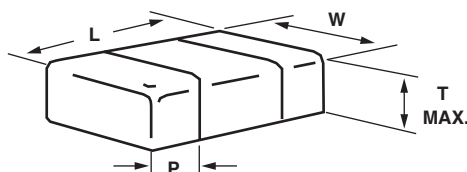

PART ORDERING NUMBER	LENGTH (L)	WIDTH (W)	MAXIMUM THICKNESS (T)	TERMINATION PAD (P)	
				MINIMUM	MAXIMUM
05006 -	0.079 ± 0.008 [2.00 ± 0.20]	0.049 ± 0.008 [1.25 ± 0.20]	0.053 [1.35]	0.010 [0.25]	0.028 [0.71]

ORDERING INFORMATION

05006-	BP	101	B	J	X	-	T
DSCC NUMBER	DIELECTRIC	CAPACITANCE NOMINAL CODE	DC VOLTAGE RATING ⁽¹⁾	CAPACITANCE TOLERANCE	TERMINATION	GROUP C TESTING OPTION	PACKAGING
CASE CODE 0805	BP BR BX	Expressed in picofarads (pF). The first two digits are significant, the third is a multiplier. An "R" indicates a decimal point. Examples: 101 = 100 pF 1R8 = 1.8 pF	X = 10 V Y = 16 V Z = 25 V A = 50 V B = 100 V C = 200 V	C = ± 0.25 pF D = ± 0.5 pF F = ± 1 % G = ± 2 % H = ± 3 % J = ± 5 % K = ± 10 % M = ± 20 % Note: C, D < 10 pF (BP) F, G, H ≥ 10 pF (BP) J, K, M ≥ 10 pF (BP, BR, BX)	M = AgPd Z = Ni barrier with tin/lead plate min. 4 % lead U = Base metallization-barrier metal-solder coated (tin/lead alloy, with a minimum of 4 % lead). Solder has a melting point of + 200 °C or less. Solder coat thickness is a minimum of 69 µinches.	C = Full Group C L = 2000 h life test only M = 1000 h life test only H = Low voltage humidity test only - = Group A test only	T = 7" Reel Plastic tape C = 7" Reel Paper tape J = 7" Reel (low quantity) R = 11 1/4" Reel Plastic tape P = 11 1/4" Reel Paper tape B = Bulk

Notes:

⁽¹⁾DC voltage rating should not be exceeded in application⁽²⁾ "U" Termination part number code for DSCC product length, width and thickness dimensions positive tolerances (including bandwidth) above are allowed to increase by the following amounts: Length 0.023 [0.60], Width/Thickness 0.012 [0.30]

DIELECTRIC 05006 MLCCS																	
STYLE		05006															
EIA TYPE		0805															
DIELECTRIC		BP						BR					BX				
VOLTAGE (Vdc)		10	16	25	50	100	200	10	16	25	50	100	10	16	25	50	100
CAP. CODE	CAP.																
0R5	0.5 pF	•	•	•	•	•	•										
1R0	1.0 pF	•	•	•	•	•	•										
1R2	1.2 pF	•	•	•	•	•	•										
1R5	1.5 pF	•	•	•	•	•	•										
1R8	1.8 pF	•	•	•	•	•	•										
2R2	2.2 pF	•	•	•	•	•	•										
2R7	2.7 pF	•	•	•	•	•	•										
3R3	3.3 pF	•	•	•	•	•	•										
3R9	3.9 pF	•	•	•	•	•	•										
4R7	4.7 pF	•	•	•	•	•	•										
5R6	5.6 pF	•	•	•	•	•	•										
6R8	6.8 pF	•	•	•	•	•	•										
8R2	8.2 pF	•	•	•	•	•	•										
100	10 pF	•	•	•	•	•	•										
120	12 pF	•	•	•	•	•	•										
150	15 pF	•	•	•	•	•	•										
180	18 pF	•	•	•	•	•	•										
220	22 pF	•	•	•	•	•	•										
270	27 pF	•	•	•	•	•	•										
330	33 pF	•	•	•	•	•	•										
390	39 pF	•	•	•	•	•	•										
470	47 pF	•	•	•	•	•	•										
560	56 pF	•	•	•	•	•	•										
680	68 pF	•	•	•	•	•	•										
820	82 pF	•	•	•	•	•	•										
101	100 pF	•	•	•	•	•	•										
121	120 pF	•	•	•	•	•	•										
151	150 pF	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
181	180 pF	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
221	220 pF	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
271	270 pF	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
331	330 pF	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
391	390 pF	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
471	470 pF	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
561	560 pF	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
681	680 pF	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
821	820 pF	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
102	1000 pF	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•
122	1200 pF	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•
152	1500 pF	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•
182	1800 pF	•	•	•	•			•	•	•	•	•	•	•	•	•	•
222	2200 pF	•	•	•	•			•	•	•	•	•	•	•	•	•	•
272	2700 pF	•	•	•				•	•	•	•	•	•	•	•	•	•
332	3300 pF	•	•					•	•	•	•	•	•	•	•	•	•
392	3900 pF							•	•	•	•	•	•	•	•	•	•
472	4700 pF							•	•	•	•	•	•	•	•	•	•
562	5600 pF							•	•	•	•	•	•	•	•	•	•
682	6800 pF							•	•	•	•	•	•	•	•	•	•
822	8200 pF							•	•	•	•	•	•	•	•	•	•



DIELECTRIC 05006 MLCCS																	
STYLE		05006															
EIA TYPE		0805															
DIELECTRIC		BP						BR					BX				
VOLTAGE (Vdc)		10	16	25	50	100	200	10	16	25	50	100	10	16	25	50	100
CAP. CODE	CAP.																
103	0.010 μF							•	•	•	•	•	•	•	•	•	•
123	0.012 μF							•	•	•	•		•	•	•	•	
153	0.015 μF							•	•	•	•		•	•	•	•	
183	0.018 μF							•	•	•	•		•	•	•	•	
223	0.022 μF							•	•	•	•		•	•	•	•	
273	0.027 μF							•	•	•	•		•	•	•	•	
333	0.033 μF							•	•	•	•		•	•	•	•	
393	0.039 μF							•	•	•	•		•	•	•	•	
473	0.047 μF							•	•	•			•	•	•		
563	0.056 μF							•	•	•			•	•	•		
683	0.068 μF							•	•	•			•	•	•		
823	0.082 μF							•	•	•			•	•	•		
104	0.10 μF							•	•	•			•	•	•		
124	0.12 μF																
154	0.15 μF																

DSCC PACKAGING QUANTITIES (1) (2)						
		7" REEL QUANTITIES		11 1/4" AND 13" REEL QUANTITIES		BULK QUANTITIES
BODY SIZE	TAPE SIZE	PLASTIC TAPE PACKAGING CODE "T"	PLASTIC TAPE PACKAGING CODE "J"	PLASTIC TAPE PACKAGING CODE "R"		VIAL PACKAGING CODE "B" WAFFLE PACKAGING CODE "W"
0805	8 mm	3000	1000	10 000		100 N/a

Notes:

- (1) Vishay Vitramon uses embossed plastic carrier tape and punch paper carrier tape
(2) REFERENCE: EIA Standard RS 481 - "Taping of Surface Mount Components for Automatic Placement"
(3) Paper tape is not available for component thickness > 0.035" [0.89 mm]
(4) DC voltage rating should not be exceeded in application



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.