

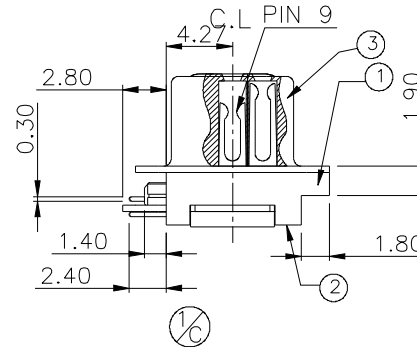


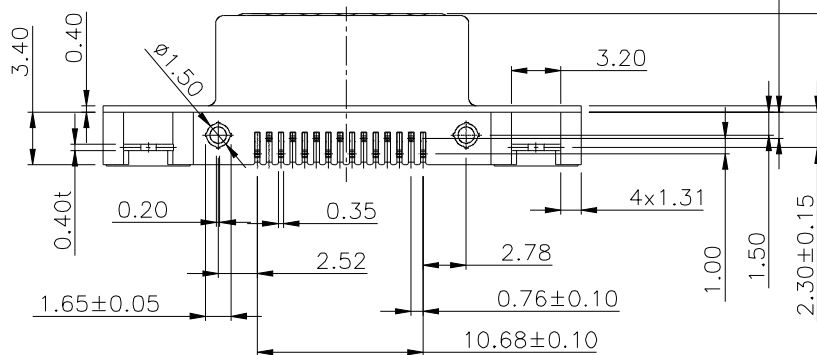


RoHS
Compliant

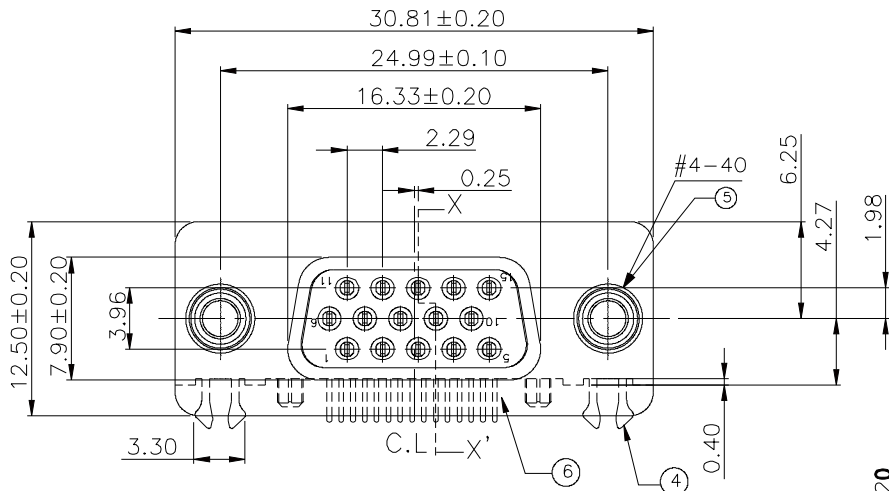

RECOMMENDED P.C.B LAYOUT (Component Side)

(P.C.B THICKNESS:1.6T)

WITHOUT LOCKING FUNCTION

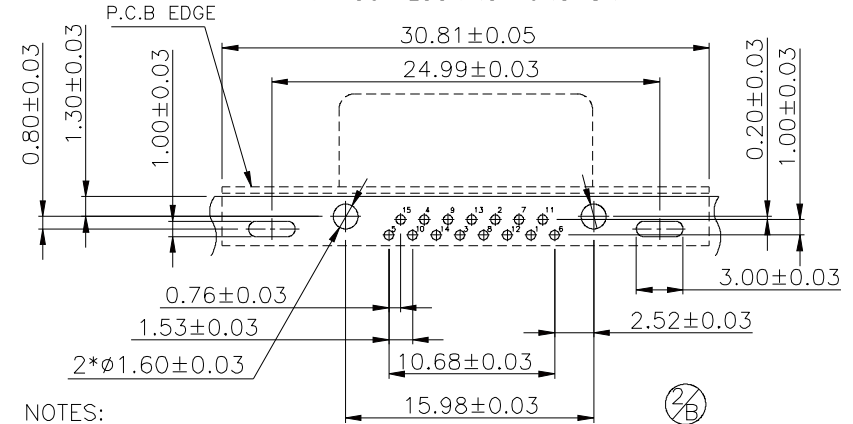

NOTES:

070553FR015 SX 06 X U

COLOR CODE:
Z-BLACK
C-BLUE(661C)

CONTACT PLATED

'S1,-05U" MIN. GOLD IN CONTACT AREA/
100U" MIN. TIN IN SOLDER AREA.

'S2-GOLD FLASH IN CONTACT./

100U" MIN. TIN IN SOLDER AREA.

'S3,-10U" MIN. GOLD IN CONTACT AREA/
100U" MIN. TIN IN SOLDER AREA.

'S4,-15U" MIN. GOLD IN CONTACT AREA/
100U" MIN. TIN IN SOLDER AREA.

'S5,-30U" MIN. GOLD IN CONTACT AREA/
100U" MIN. TIN IN SOLDER AREA.

'S6,-50U" MIN. GOLD IN CONTACT AREA/
100U" MIN. TIN IN SOLDER AREA.

6	TERMINAL	COPPER ALLOY	——	GOLD/TIN PLATED
5	RIVET	COPPER ALLOY	——	NICKEL PLATED
4	FORK	COPPER ALLOY	——	TIN PLATED
3	SHELL	METAL	——	NICKEL PLATED
2	COVER	HIGH TEMP PLASTICS	——	UL 94V-0
1	HOUSING	HIGH TEMP PLASTICS	——	UL 94V-0
NO. DESCRIPTION		MATERIAL	COLOR	REMARK

SUYIN
CONNECTOR

CUSTOMER COPY TITLE: 15 PIN D-SUB CONNECTOR FEMALE
R/A TYPE LOW PROFILE

PART NO. 070553FR015SX06XU

PRODUCT SPEC. 070553FR/7853S

FILE NAME. DING 070553FR015SX06XU-C

SCALE 2:1 UNIT:mm A4 SHEET: 1 of 2

EC1B-070416-07	C	07'/04/16	C1:取消STAND OFF面1° 斜面	扈 勇	許俊賢	Angle	±2°
EC1B-060912-09	B	06'/09/12	B1:變更圖框及合併業務圖及包裝示意圖;B2:重標PCB公差;	官祝東	許俊賢	30 ~	±0.50
EC1T-060427-03	A	06'/04/27	A1:ADD->070553FR015SX06ZU;A2:ADD->RoHS;	王淑麗	李儒平	10 ~ 30	±0.30
	O	03'/11/20	NEW	宋勃逸	陳清照	~ 10	±0.15
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	

DRAW	扈 勇	07'/04/16
DESIGN	扈 勇	07'/04/16
CHECK	賀 敏	07'/04/16
APPRO.	許俊賢	07'/04/16

Original:Draw: 宋勃逸 Design: 宋勃逸 Check: 陳清照 Appro: 陳清照 發行日期: 03/11/20

020607-TY030