

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0014563064

Status:

Active

Overview:

cgrid_sl_products

Description:

2.54mm (.100") Pitch SL™ Insulation Displacement Connector Assembly, Female, Single Row, Version D, Back Ribs, Wire Size 24, 0.38µm (15µ") Gold (Au), 6 Circuits

Documents:

3D Model

Drawing (PDF)

Product Specification PS-70400 (PDF)


RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	Ribbon Cable / Wire Trap Connectors
Series	70400
Comments	Terminals Preloaded
Component Type	Housing
Glow-Wire Compliant	No
Overview	cgrid_sl_products
Product Name	SL™

Physical	
Circuits (Loaded)	6
Color - Resin	Black
Durability (mating cycles max)	50
Entry Angle	Vertical
Flammability	94V-0
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Number of Rows	1
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Plating min: Mating (µin)	15
Plating min: Mating (µm)	0.375
Plating min: Termination (µin)	75
Plating min: Termination (µm)	1.875
Polarized to Mating Part	Yes
Stackable	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	IDT or Pierce
Wire Insulation Diameter	1.35mm (.053") max.
Wire Size AWG	24
Wire/Cable Type	Discrete Wire, Ribbon Cable

Electrical	
Current - Maximum per Contact	3A
Voltage - Maximum	250V

Material Info

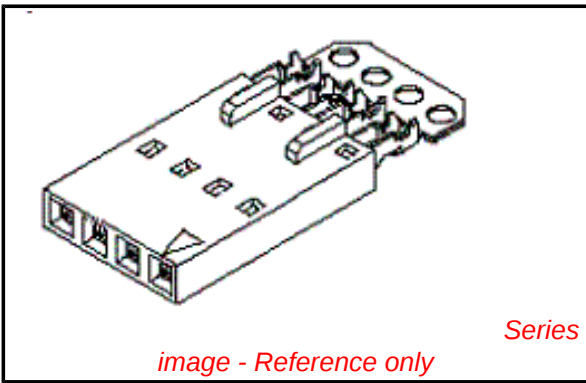

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

70400Series

Mates With

70004 Interim Clip (Single Row), 70013 Interim Clip (Dual Row)

Use With

7307 Tinned 28AWG, 7767 Topcoat 28AWG, 24241 Tinned 26AWG, 8996 Topcoat 26AWG, 24226 Tinned 24AWG, 8997 Topcoat 24AWG, 24369 High Flex 26AWG, 24389 High Flex 24AWG

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.



Global

Description	Product #
Hawk Semi-Automatic Discrete	0011201337

Old Part Number	A-70400-0600	Wire Terminator for SL - Rebuilt US*
Reference - Drawing Numbers		Hawk™ Ribbon <u>0623003000</u>
Product Specification	PS-70400	Cable Terminator for SL without Break-off
Sales Drawing	SDA-70400-0596-0619	Hawk™ Semi- <u>0623004900</u> Automatic Discrete
		Wire Terminator for SL - Rebuilt CE
		Approved*
		Hawk™ Flat Flex <u>0623005200</u>
		Cable Terminator for SL with Break-off
		Hawk™ Ribbon <u>0623005300</u>
		Cable Terminator with for SL Break-off
		IDT Discrete <u>0621000700</u>
		Handtool Module for SL™
		Hawk™ Semi- <u>0623003100</u> Automatic Discrete
		Wire Terminator for SL

This document was generated on 05/21/2010
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

OPTION D

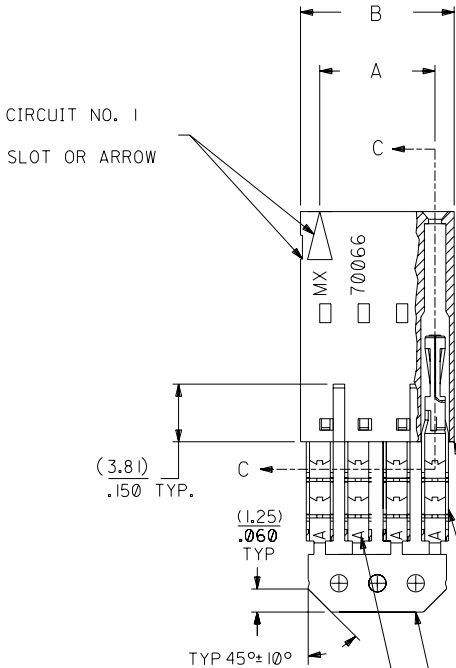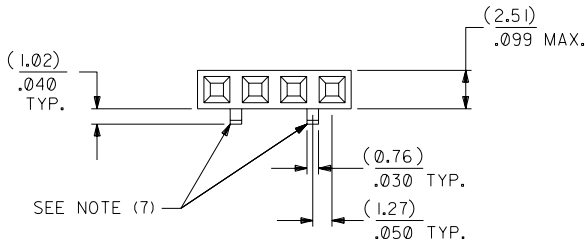

I.D. SLOT CODE TO WIRE GAUGE CHART	
I.D. SLOT CODE	WIRE GAUGE
A	24 AWG.

PLATING CODE (STRIPE ON CARRIER STRIP)	
PLATING	COLOR
15 GOLD	YELLOW

15 GOLD - .000015 MIN. GOLD IN SELECT AREA WITH
.000075 MIN. TIN
IN SELECT AREA OVER .000050 MIN. NICKEL
OVER-ALL.

*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.


NOTES:

- 1) TO BE USED WITH (24) AWG. STRANDED WIRE WITH (1.35)/.053 DIA. MAX. INSULATION.
- 2) SEE CHART FOR CIRCUIT SIZES.
- 3) STANDARD PACKAGING PER PK-70873-0001. OPTIONAL PACKAGING MAY BE AVAILABLE , REQUEST DWG. PK-70400
- 4) PARTS STACKABLE END TO END ON (2.54)/.100 CENTERS.
- 5) REFER TO PRODUCT SPECIFICATION: PS-70400.
- 6) SEE DWG. SDA-70400-**** (SHT. 5) FOR OPTIONAL HOUSING DETAILS.
- 7) 4 CIRCUIT SHOWN. 3 - 25 CKT'S. HAVE (2) RIBS.
- 8) TO MATE WITH MOLEX PART NO'S.: 70004-****, 70013-****


9) 2 CIRCUIT ASSEMBLIES SUPPLIED AS GROUPED PAIRS.



SECTION C-C



PRE-LOADED
ASSEMBLY

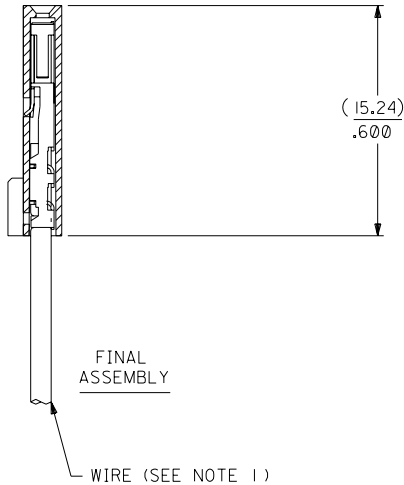

FINAL
ASSEMBLY

— WIRE (SEE NOTE 1)

CKT. SIZE	A	B	EDP. NO.	ENG. NO.
2	$\frac{(2.54)}{.100}$	$\frac{(5.05)}{.199}$	14-56-3024	A-70400-0596
3	$\frac{(5.08)}{.200}$	$\frac{(7.59)}{.299}$	14-56-3034	A-70400-0597
4	$\frac{(7.62)}{.300}$	$\frac{(10.13)}{.399}$	14-56-3044	A-70400-0598
5	$\frac{(10.16)}{.400}$	$\frac{(12.67)}{.499}$	14-56-3054	A-70400-0599
6	$\frac{(12.70)}{.500}$	$\frac{(15.21)}{.599}$	14-56-3064	A-70400-0600
7	$\frac{(15.24)}{.600}$	$\frac{(17.75)}{.699}$	14-56-3074	A-70400-0601
8	$\frac{(17.78)}{.700}$	$\frac{(20.29)}{.799}$	14-56-3084	A-70400-0602
9	$\frac{(20.32)}{.800}$	$\frac{(22.83)}{.899}$	14-56-3094	A-70400-0603
10	$\frac{(22.86)}{.900}$	$\frac{(25.37)}{.999}$	14-56-3104	A-70400-0604
11	$\frac{(25.54)}{1.000}$	$\frac{(27.91)}{1.099}$	14-56-3114	A-70400-0605
12	$\frac{(27.94)}{1.100}$	$\frac{(30.45)}{1.199}$	14-56-3124	A-70400-0606
13	$\frac{(30.48)}{1.200}$	$\frac{(32.99)}{1.299}$	14-56-3134	A-70400-0607
14	$\frac{(33.02)}{1.300}$	$\frac{(35.53)}{1.399}$	14-56-3144	A-70400-0608
15	$\frac{(35.56)}{1.400}$	$\frac{(38.07)}{1.499}$	14-56-3154	A-70400-0609
16	$\frac{(38.01)}{1.500}$	$\frac{(40.61)}{1.599}$	14-56-3164	A-70400-0610
17	$\frac{(40.64)}{1.600}$	$\frac{(43.15)}{1.699}$	14-56-3174	A-70400-0611
18	$\frac{(43.18)}{1.700}$	$\frac{(45.69)}{1.799}$	14-56-3184	A-70400-0612
19	$\frac{(45.72)}{1.800}$	$\frac{(48.23)}{1.899}$	14-56-3194	A-70400-0613
20	$\frac{(48.26)}{1.900}$	$\frac{(50.77)}{1.999}$	14-56-3204	A-70400-0614
21	$\frac{(50.80)}{2.000}$	$\frac{(53.31)}{2.099}$	14-56-3214	A-70400-0615
22	$\frac{(53.34)}{2.100}$	$\frac{(55.85)}{2.199}$	14-56-3224	A-70400-0616
23	$\frac{(55.88)}{2.200}$	$\frac{(58.39)}{2.299}$	14-56-3234	A-70400-0617
24	$\frac{(58.42)}{2.300}$	$\frac{(60.93)}{2.399}$	14-56-3244	A-70400-0618
25	$\frac{(60.96)}{2.400}$	$\frac{(63.47)}{2.499}$	14-56-3254	A-70400-0619

	E	REVISED PER ECR NO. U8210 10-17-88 AAB	DIMENSIONS SHOWN METRIC INCH		= = REVISE ONLY ON CAD SYSTEM	
F	D	LEAD FREE UCP2004-1769 RWHITE 04/03/17	REVERSE PER ECR #U8010 2/3/88 MJM	UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1°/20	TITLE	ASSEMBLY, SL CONNECTOR (SINGLE ROW - (2.54)"/100 GRID)
E I	C	ADD CARRIER CHAMF ECN #UDT1998-0280 05/20/98 LMCGRATH	REDRAWN ON CAD ECRN# 8842 5/7/86 W.Z.	INCH METRIC 3 PLACE ± .010 --- 2 PLACE ± .014 ± .025 1 PLACE --- ± .035	DATE	10/09/84
LTR.	REVISIONS	LTR.	REVISIONS	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	PART NO. SEE CHART	SHEET NO. SDA-70400-0596-0619
				DRWG. BY W.Z. CHKD. BY W.Z. APPRD. BY SCALE 4 : 1	FILE NAME S70400DX4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.
					DATE	SIZE