

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0473093751

Status:

Active

Description:

1.10mm (.043") Pitch microSD Card Header, with Detect Switch, Height 3.75mm (.148"), Lead free

Documents:

3D Model

Drawing (PDF)


Product Specification PS-47309-001 (PDF)

RoHS Certificate of Compliance (PDF)

General	
Product Family	Memory Card Sockets
Series	47309
Button Type	Push-Pull
Comments	Push-Pull Type
Component Type	I/O Header (Card)
Product Name	microSD Card, TransFlash
Type	N/A
Physical	
Card Detection Switch	Yes
Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Durability (mating cycles max)	10,000
Ejector Button Side	No Ejector Button Present
Entry Angle	90° Angle
Keying to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	High Temperature Thermoplastic
PCB Locator	No
PCB Mounting Side	Reverse
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface (in)	0.043 In
Pitch - Mating Interface (mm)	1.10 mm
Pitch - Term. Interface (in)	0.043 In
Pitch - Term. Interface (mm)	1.10 mm
Plating min: Mating (µin)	29.5
Plating min: Mating (µm)	0.75
Plating min: Termination (µin)	2
Plating min: Termination (µm)	0.05
Ports	1
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Surface Mount

Electrical	
Current - Maximum per Contact	0.5A
Shielded	Yes
Voltage - Maximum	5V

Solder Process Data	
Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	2



Series
image - Reference only

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
47309Series

Mates With
Standard SIM Card

Use With
microSD Card

Process Temperature max. C

255

Material Info

Reference - Drawing Numbers

Product Specification



PS-47309-001

Sales Drawing




SD-47309-001

This document was generated on 03/31/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

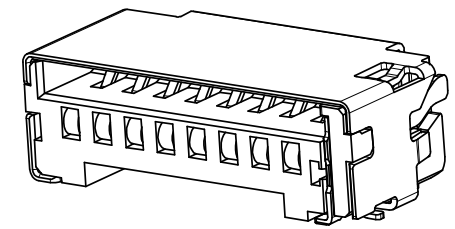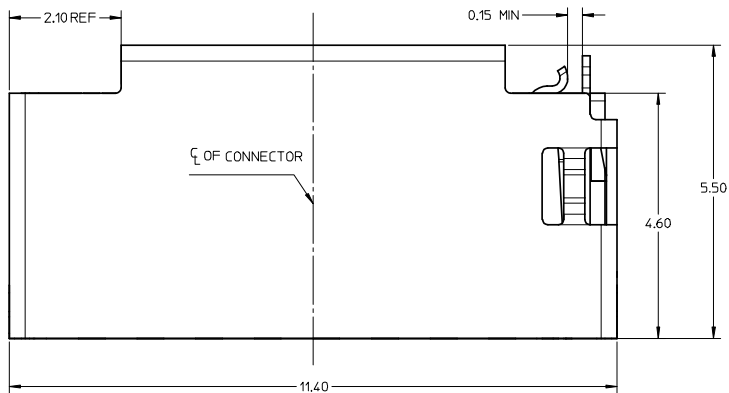

NOTE:
 1 MATERIAL:
 1-1 HOUSING : LCP, 30% G/F, UL 94V-0, BLACK
 1-2 SIGNAL TERMINAL AND DETECT TERMINAL : PHOSPHOR BRONZE
 1-3 METAL SHELL : STAINLESS STEEL
 2 FINISH:
 2-1 SIGNAL TERMINAL : 1.25-6.25 MICRON NICKEL MIN UNDER-PLATED,
 0.75-1.25 MICRON GOLD MIN ON CONTACT AREA, GOLD FLASH PLATED ON SOLDER AREA
 2-2 METAL SHELL : GOLD FLASH PLATED OVER NICKEL ON SOLDER AREA
 2-3 DETECT PIN : 1.25-6.25 MICRON NICKEL MIN UNDER-PLATED
 GOLD FLASH PLATED ON CONTACT AREA, TIN PLATED ON SOLDER AREA
 3 PRODUCT SPECIFICATION: PS-47309-001.

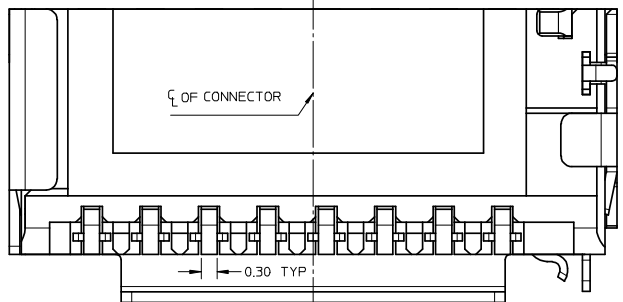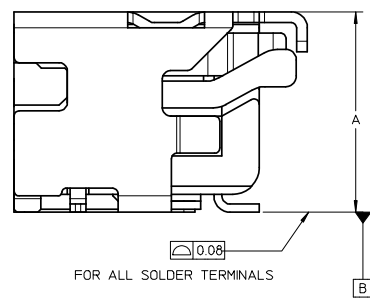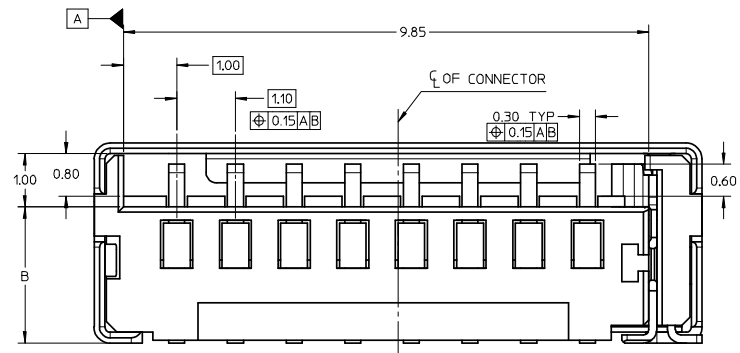

473093751	3.75	2.55
473093551	3.55	2.35
473093351	3.35	2.15
473092851	2.85	1.65
473092651	2.65	1.45
PART NUMBER	DIMENSION A	DIMENSION B

REVISION	EC NO. : SH200806090399	2008/02/22	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
	DRWN: LLIU10	2008/03/11			mm INCH		MM ONLY		15:1	METRIC	☉ □			
	CHKD: YLZH02	2008/04/02					DRAWN BY DATE		TITLE					
	APPR: HWANG						XIXU 2005/12/24		TFR HEADER W/DETECT PIN					
							CHECKED BY DATE							
							Y JWU 2005/12/24							
							APPROVED BY DATE							
							Y JWU 2005/12/24		MOLEX MOLEX INCORPORATED					
							ANGULAR ± 1 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
							DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-47309-001		1 OF 2	
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

