

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0395282004](#)
Status: **Active**
Description: 5.00mm (.197") Pitch Eurostyle™ Vertical PCB Dual Level Header, Open Ends, 4 Circuits

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-39500-001 \(PDF\)](#)


General
Product Family Terminal Blocks
Series [39528](#)
Application Wire-to-Board
Component Type PCB Header
Product Literature Order No USA-355
Product Name ESE, Eurostyle™ Pluggable
Type Euro Block

Physical
Circuits (Loaded) 4
Entry Angle N/A
Lock to Mating Part Yes
Number of Rows 2
Orientation Vertical
PC Tail Length (in) 0.197 In
PC Tail Length (mm) 5.00 mm
PCB Thickness Recommended (in) 0.120 In
PCB Thickness Recommended (mm) 5.00 mm
Panel Mount No
Pitch - Mating Interface (in) 0.197 In
Pitch - Mating Interface (mm) 5.00 mm
Polarized to Mating Part Yes
Shrouded Open Ends
Stackable Yes
Surface Mount Compatible (SMC) N/A
Temperature Range - Operating -40°C to +105°C
Wire Size AWG N/A

Electrical
Current - Maximum per Contact 15A
Voltage - Maximum 300V

Material Info

Reference - Drawing Numbers
Product Specification PS-39500-001
Sales Drawing SD-39528-003



*Series
image - Reference only*

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status


China RoHS



Need more information on product environmental compliance?
Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)
Please visit the [Contact Us](#) section for any non-product compliance questions.





Search Parts in this Series
[39528Series](#)

Mates With
[39520](#) Horizontal Plug, [39523](#) Vertical Plug, Most 5.00mm (.197") Pitch Industry Standard Plugs

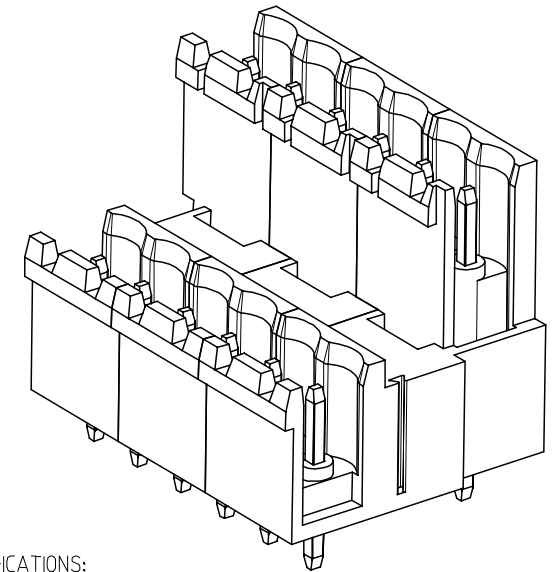

SPECIFICATIONS:

1. MATERIAL:
 - (1) BODY: PA66 (UL 94V-0).
 - (2) COVER: PBT (UL 94V-0).
 - (3) LONG TERMINAL: BRASS.
 - (4) SHORT TERMINAL: BRASS.
2. ELECTRICAL RATING: 300V, 15A.
3. DIELECTRIC WITHSTAND: AC 2500V FOR 1 MINUTE.
4. BREAKDOWN VOLTAGE: 4000V.
5. INSULATION RESISTANCE: DC 1000V, 1000 MEGOHMS.
6. OPERATING TEMPERATURE: -40°C TO +105°C.
7. NUMBER OF CIRCUIT POSITIONS AVAILABLE= 4
THROUGH 48, EVEN NUMBERED CIRCUIT SIZES ONLY.
8. ALL COMPONENTS ARE ROHS COMPLIANT.

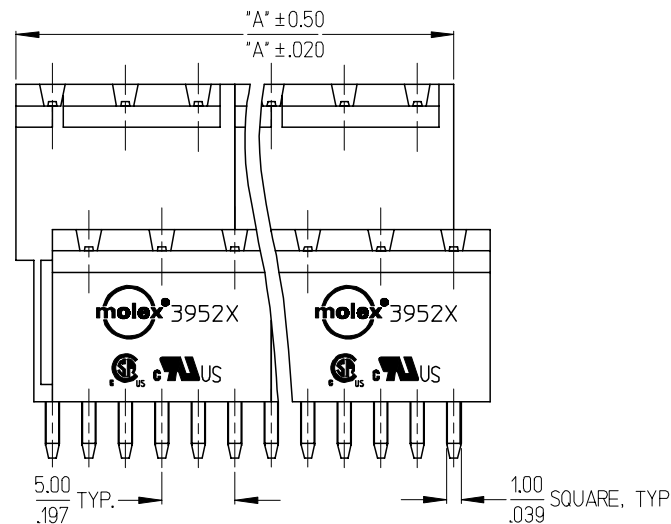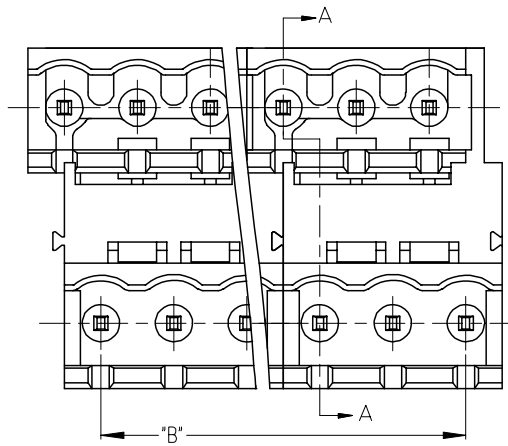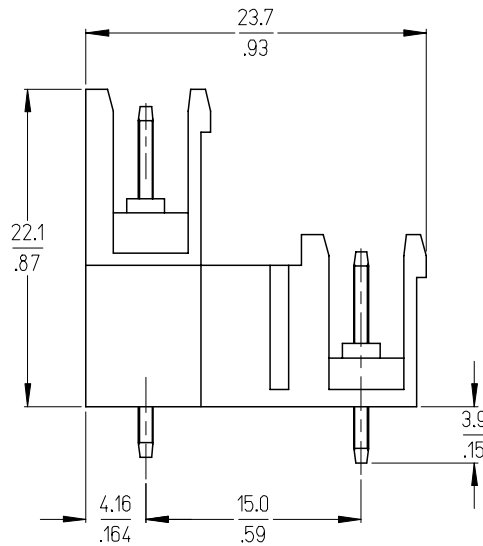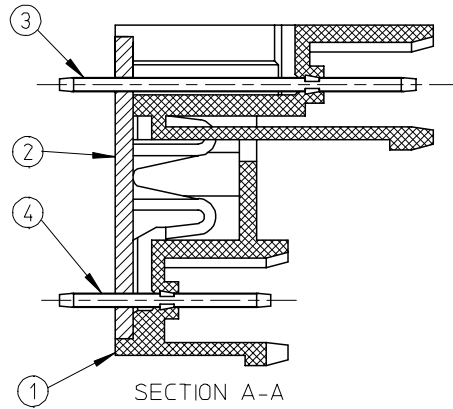

INITIAL RELEASE EC NO: ETC2007-0020 DRWN: CYORK 2006/07/25 CHKD: JPWLICKI 2006/07/25 APPR: JPWLICKI 2006/07/26	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 3:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY C. YORK	DATE 2006/07/24	TITLE 5.0MM, EURO DUAL HEADER, VERTICAL, OPEN END, STACKABLE	
			4 PLACES	± ---	± ---	CHECKED BY	DATE		
			3 PLACES	± ---	± .005	J. PAWLICKI	2006/07/24		
			2 PLACES	± 0.13	± .01	APPROVED BY	DATE		
	1 PLACE	± 0.3	± ---	J. PAWLICKI	2006/07/24	 MOLEX INCORPORATED			
			ANGULAR ± 2 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE B SEE SHT. 2		SD-39528-003		1 OF 2
A	REV		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

