

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0512342003](#)
Status: **Active**
Description: CRC™ Shielded Rectangular I/O Plug Housing, For Plug Assembly, Male Terminal, Signal, 20 Circuits, Polarization Type B, Polarization Position B-3

Documents:

[Drawing \(PDF\)](#) [Product Specification PS-51238-018 \(PDF\)](#)
[Product Specification PS-51238-010 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA	LR19980
TUV	R72081037
UL	E29179

General

Product Family	I/O Connectors
Series	51234
Application	N/A
Component Type	Housing
Product Name	CRC™
Type	N/A

Physical

Boot Color	N/A
Breakaway	No
Circuits (Loaded)	N/A
Circuits (maximum)	20
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Gender	Male
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Plating Mating	n/a
Material - Resin	Polyester
Number of Rows	5
Orientation	Vertical
Packaging Type	Tray
Panel Mount	N/A
Pitch - Mating Interface (in)	0.118 In
Pitch - Mating Interface (mm)	3.00 mm
Pitch - Term. Interface (in)	0.118 In
Pitch - Term. Interface (mm)	3.00 mm
Polarized to Mating Part	Yes
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	N/A
Waterproof / Dustproof	No

Electrical

Current - Maximum per Contact	1A, 2A, 3.5A, 3A
Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	250V AC (RMS)/DC

Material Info



image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No**
**Halogen-Free
Status**
Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[51234Series](#)

Mates With

[51238](#)

Use With

56116, 56117, 56118 and 56119 male
terminal, [56380](#) plug shell body, [56381](#) plug
shell cover


Reference - Drawing Numbers

Product Specification
Sales Drawing

PS-51238-010, PS-51238-018, RPS-51238-001
SD-51234-005

This document was generated on 04/06/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

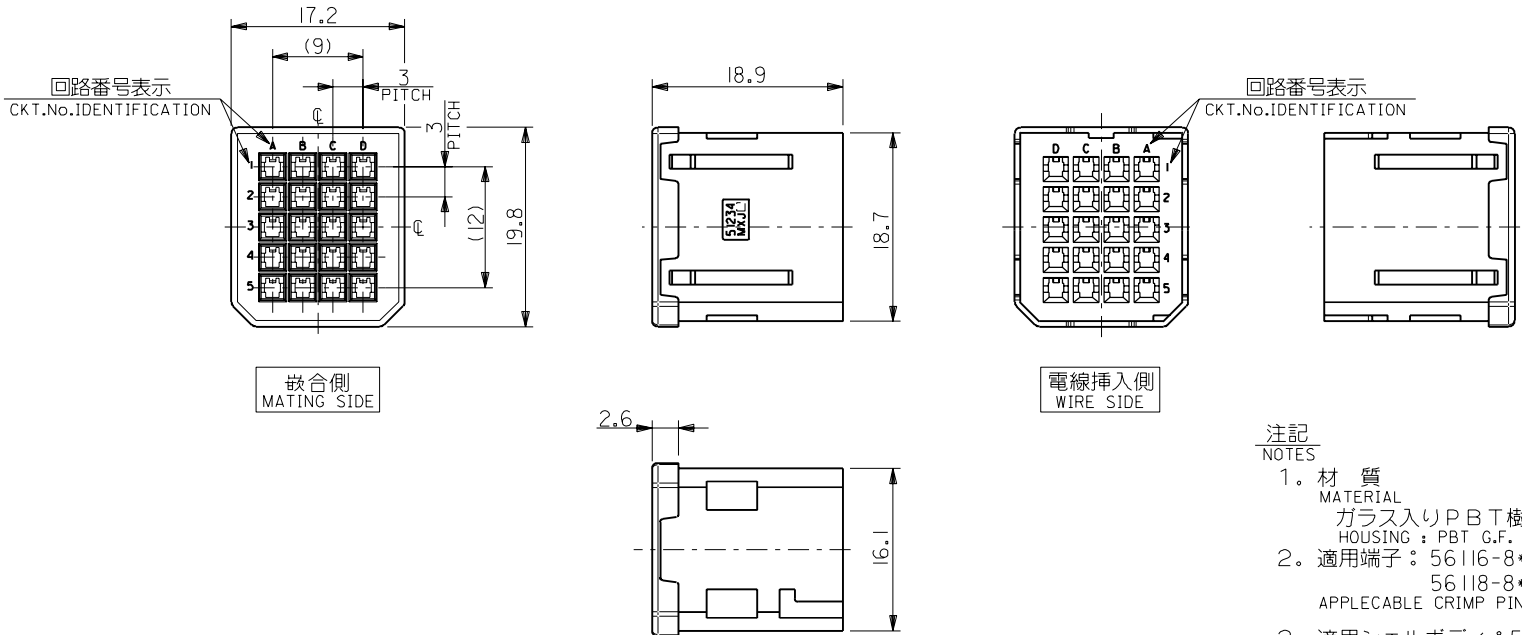

- 注記
NOTES
1. 材質
MATERIAL
ガラス入りPBT樹脂 UL94V-0 色:黒
HOUSING : PBT G.F. UL94V-0 COLOR : BLACK
 2. 適用端子 : 56116-8*90 , 56117-8*90
56118-8*90 , 56119-8*90
APPLICABLE CRIMP PIN : 56116-8*90 , 56117-8*90
56118-8*90 , 56119-8*90
 3. 適用シエルボディ : 56380-2000
APPLICABLE SHELL BODY : 56380-2000
 4. 適用シエルカバー : 56381-2000
APPLICABLE SHELL COVER : 56381-2000
 5. 嵌合相手 : 51238-201*
MEET WITH : 51238-201*

<誤嵌合防止キー（極性）タイプ> <POLARITY KEY TYPE>

51234-2001	51234-2002	51234-2003	51234-2004	51234-2005
STANDARD TYPE	A TYPE	B TYPE	C TYPE	D TYPE

C-4	D	51234-2005	51234-**0*	20
C-3	C	51234-2004		
B-3	B	51234-2003		
B-2	A	51234-2002		
—#—	STANDARD	51234-2001		
POLARITY POSITION (CIRCUIT No.)	POLARITY TYPE	MATERIAL No.	MODEL No.	CIRCUIT

EC NO. DRWN: CHK'g APPR:			EC NO. DRWN: CHK'g APPR:			EC NO. DRWN: CHK'g APPR:			REVISED '01/10/04 EC NO. J2002-0786 DRWN: S.AKIYAMA CHK'g: J.MIYAZAWA APPR: YO.ITO	RELEASED '01/02/09 EC NO. JD2001-1040 DRWN: S.AKIYAMA CHK'g: J.MIYAZAWA APPR: H.IKESUGI	DESCRIPTION 記述 —	MATERIAL 材料 注記参照 SEE NOTES	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差		SCALE 2-1	DESIGN UNITS ☒ mm ☐ INCH	 THIRD ANGLE PROJECTION	☐ mm INCH ☐ mm INCH ☒ mm ONLY	SHEET NO. REVISE ON CAD ONLY
												FINISH 仕上げ —	10 UNDER 未満	±0.2	DRAWN BY & DATE S. Akizawa '01/25		TITLE: COMPACT ROBOT CONN.(CRC) PLUG PIN HS'G		
												10 OVER 以上 30 UNDER 未満	±0.25	CHECKED BY & DATE J. Miyazawa / Y. Ito					
												30 OVER 以上	±0.3	APPROVED BY & DATE S. Akizawa		MOLEX INCORPORATED			
											WIRE RANGE 適用電線範囲 —		ANGLE 角度	±3°	CAD FILE NAME 51234005.S01		MATERIAL NO. SEE CHART	DRAWING NO. SD-51234-005	SHEET NO. 1 OF 1
											INS. RANGE 被覆外径 —		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.					SIZE B	