

**3.0Amp Rectifiers**

# 1N540XLD Series

**Features**

- Low forward voltage drop.
- Low reverse leakage current
- High current capability
- High surge current capability

**Mechanical Data**

- Case : Molded plastic DO-201AD
- Epoxy : UL94V-0 rate flame retardant
- Terminals: Solderable per MIL-STD-202 method 208 guaranteed
- Polarity: Color band denotes cathode end.
- Mounting Position : Any.
- Weight: 1.1 gram


**Maximum Ratings and Electrical Characteristics**

(Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%)


Parameter	Symbol	Type							Units
		1N 5400	1N 5401	1N 5402	1N 5404	1N 5406	1N 5407	1N 5408	
Repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V <sub>R</sub>	50	100	200	400	600	800	1000	V
Maximum instantaneous forward voltage, I <sub>F</sub> =3A	V <sub>F</sub>	0.95							V
Maximum average forward rectified current @ T <sub>L</sub> =75°C	I <sub>F(AV)</sub>	3							A
Peak forward surge current @8.3ms single half sine wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	150							A
Maximum DC reverse current, at rated DC blocking voltage T <sub>J</sub> =25°C T <sub>J</sub> =100°C	I <sub>R</sub>	5 250							μA μA
Typical thermal resistance, Junction to ambient(Note 2)	R <sub>th, JA</sub>	15							°C/W
Typical junction capacitance @ f=1MHz and applied 4VDC reverse voltage	C <sub>J</sub>	40							pF
Storage temperature	T <sub>stg</sub>	-55 ~ +125							°C
Operating temperature	T <sub>J</sub>	-55 ~ +125							°C

## Characteristic Curves


Forward Current Derating Curve

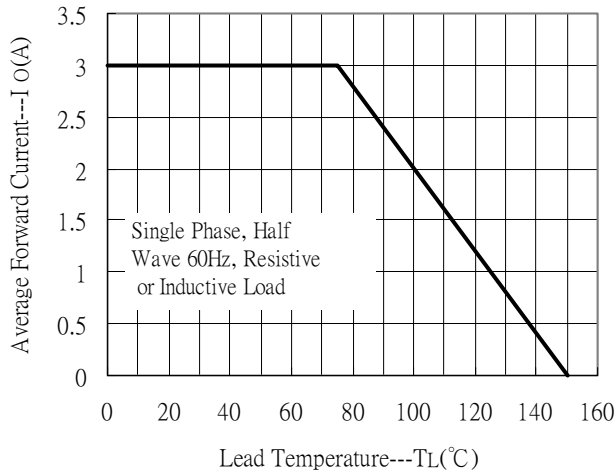


Forward Current vs Forward Voltage

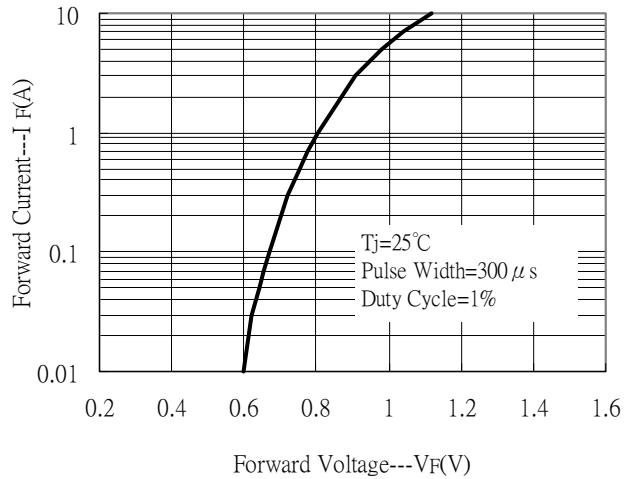


Maximum Non-Repetitive Peak Forward Surge Current

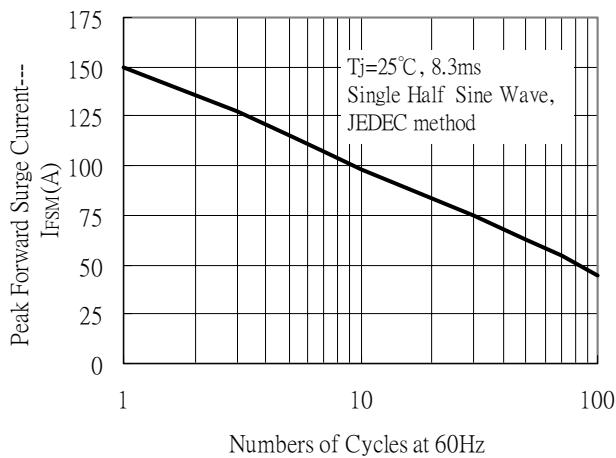


Junction Capacitance vs Reverse Voltage

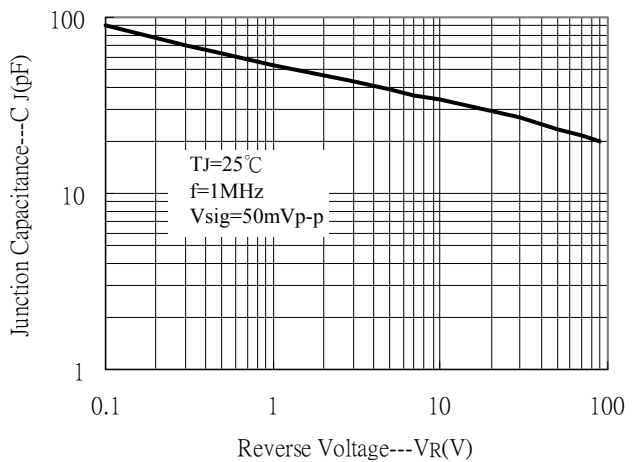

Reverse Leakage Current vs Reverse Voltage

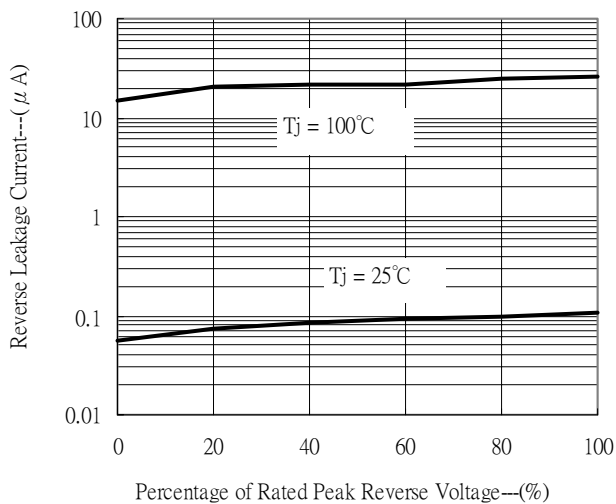

## DO-201AD Dimension

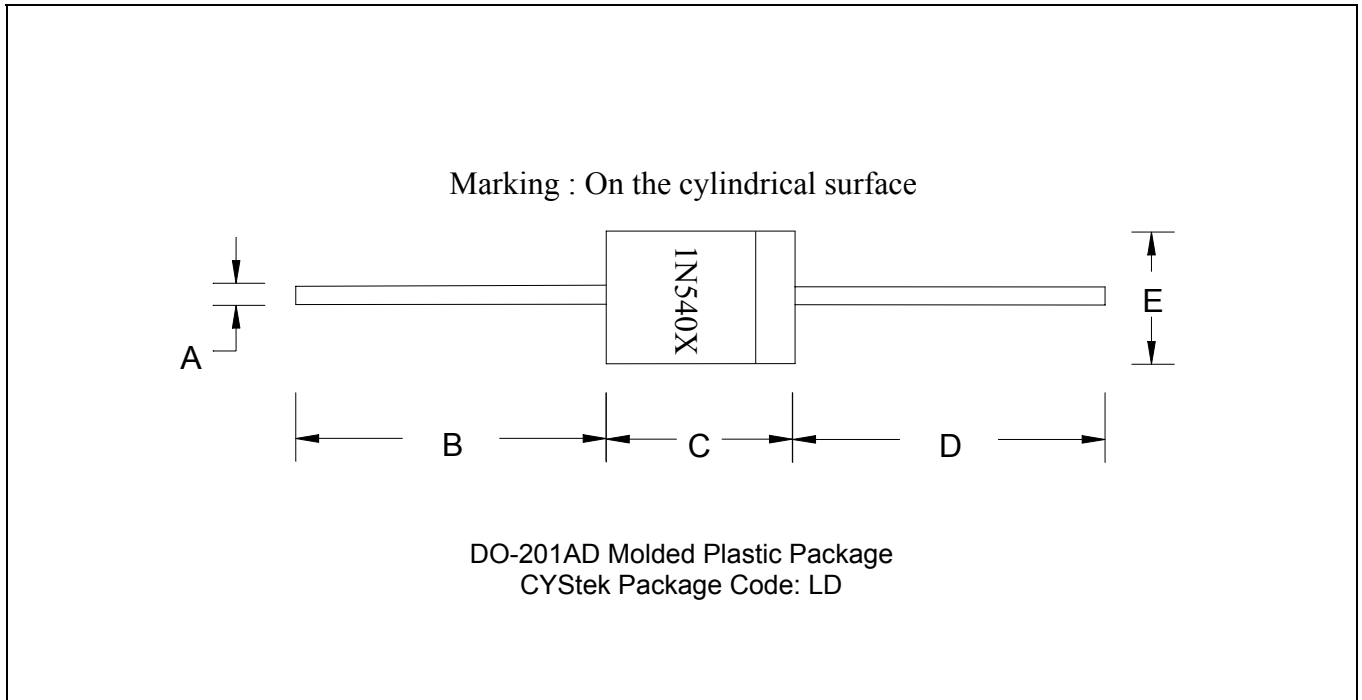

\*:Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.028	0.034	0.71	0.86	D	1.000	-	25.40	-
B	1.000	-	25.40	-	E	0.080	0.107	2.0	2.7
C	0.160	0.205	4.10	5.20					

Notes : 1.Controlling dimension : millimeters.

2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.

3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

### Material :

- Lead : Axial leads, solderable per MIL-STD-202, Method 208 guaranteed.
- Mold Compound : Epoxy resin family, flammability solid burning class: UL94V-0

### Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.