

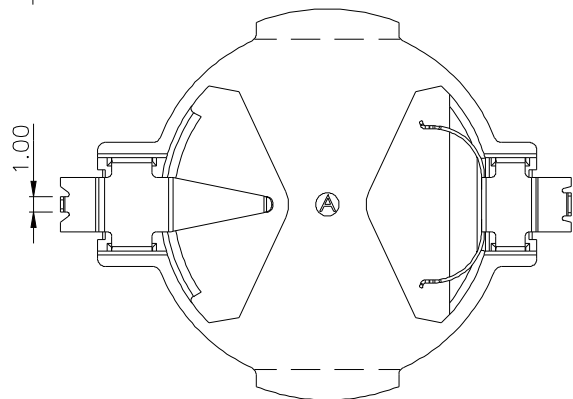


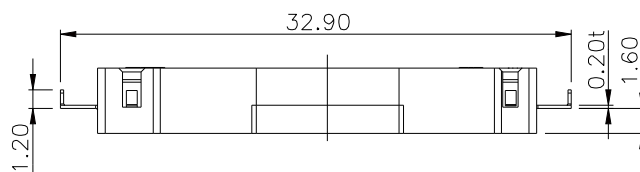



RoHS Compliant
2002/95/EC

HSF

Level-1 Controlled Substances are banned

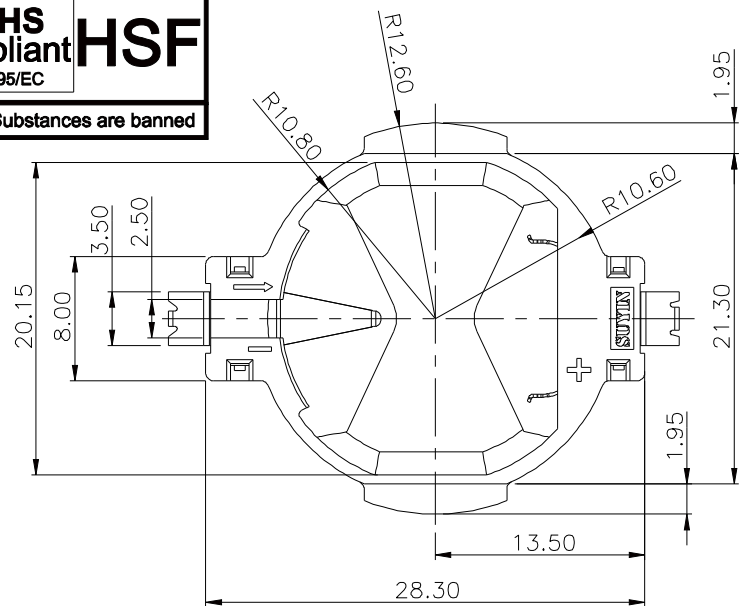

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)
P.C.B THICKNESS=1.40mm
WITHOUT LOCKING FUNCTION

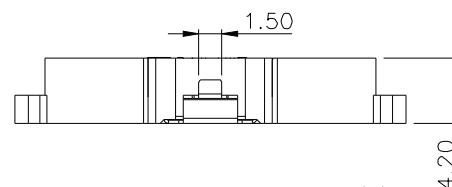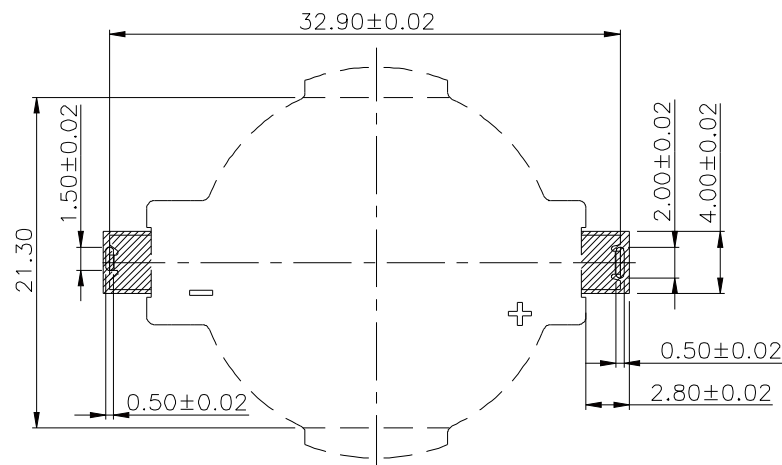

NOTE(1) :
060003FA002 GX 08NL

1.PLATING

G1 -5u" GOLD OVER NICKEL.
"G2,-GOLD FLASH OVER 30u" MIN NICKEL.
G3 -10u" GOLD OVER NICKEL.
G4 -15u" GOLD OVER NICKEL.
G5 -30u" GOLD OVER NICKEL.

3	TERMINAL	COPPER ALLOY	—	GOLD PLATED
2	TERMINAL	COPPER ALLOY	—	GOLD PLATED
1	PLASTICS	HIGH TEMP PLASTICS	WHITE	UL94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

SUYIN
CONNECTOR

CUSTOMER COPY TITLE: FOR CR2032 BATTERY CONN.

PART NO. 060003FA002GX08NL

PRODUCT SPEC. 060003FAXXXX08XX

FILE NAME. DING 060003FA002GX08NL-C

SCALE 2:1 UNIT:mm A4 SHEET: 1 of 2

			NEW RELEASE	涂冰 許俊賢	Angle 30 ~ ±2° ±0.50	DRAW	涂冰	08'/01/11
DCB-071023-10	PA	07'/10/23	PA1:變更結構.	劉嫻娜 鄭家奇	10 ~ 30 ±0.30	DESIGN	涂冰	08'/01/11
	PO	07'/09/13	NEW	劉嫻娜 許俊賢	~ 10 ±0.15	CHECK	楊國輝	08'/01/11
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO.	許俊賢	08'/01/11

Original:Draw: 劉嫻娜 Design: 劉嫻娜 Check: 楊國輝 Appr:許俊賢 發行日期:07'/09/13

070913-BC011